SPRINT DELIVERY – 4

TEAM ID	PNT2022TMID12914
Project Name	Smart Farmer - IOT Enabled Smart Farming Application

5.5 Receiving commands from IBM cloud using Python program import time import sys
import ibmiotf.application

import ibmiotf.device import
random

#Provide your IBM Watson Device Credentials
organization = “jztdcw”

deviceType = "NodeMCU"

deviceId = " node-mcu-4321 "

authMethod = "use-token-auth"

authToken = "987654321"

Initialize GPIO

def myCommandCallback(cmd): print("Command
received: %s" % cmd.data['command'])
status=cmd.data['command'] if
status=="motoron": print ("motor is on") elif

```
status == "motoroff":        print ("motor is off")     else
:

       print ("please send proper command")


try:

  deviceOptions = {"org": organization, "type": deviceType, "id": deviceId,
"auth-method": authMethod, "auth-token": authToken}
deviceCli = ibmiotf.device.Client(deviceOptions)

      #.....


except Exception as e:

   print("Caught exception connecting device: %s" % str(e))

 sys.exit()

# Connect and send a datapoint "hello" with value "world" into the cloud
as an event of type "greeting" 10 times deviceCli.connect()



while True:

       #Get Sensor Data from DHT11
temp=random.randint(90,110)

Humid=random.randint(60,100)
Mois=random. Randint(20,120)
data = { 'temp' : temp, 'Humid':
Humid , 'Mois': Mois}

       #print data        def
```

myOnPublishCallback():

print ("Published Temperature = %s C" % temp, "Humidity = %s %%" % Humid, “Moisture =%s deg c” % Mois “to IBM Watson")
success = deviceCli.publishEvent("IoTSensor", "json", data, qos=0, on_publish=myOnPublishCallback) if not success:
print("Not connected to IoTF")

time.sleep(10)

deviceCli.commandCallback = myCommandCallback # Disconnect the device and application from the cloud
deviceCli.disconnect()

```
import time
import sys
import ibmiotf.application
import ibmiotf.device
import random


#Provide your IBM Watson Device Credentials
organization = "157uf3"
deviceType = "abcd"
deviceId = "7654321"
authMethod = "token"
authToken = "87654321"

# Initialize GPIO
def myCommandCallback(cmd):
    print("Command received: %s" % cmd.data['command'])
    status=cmd.data['command']
    if status=="motoron":
        print ("motor is on")
    elif status == "motoroff":
        print ("motor is off")
    else :
        print ("please send proper command")

try:
        deviceOptions = {"org": organization, "type": deviceType, "id": deviceId, "auth-method": authMe
        deviceCli = ibmiotf.device.Client(deviceOptions)
        #.....................................
```

Ln: 22 Col: 21

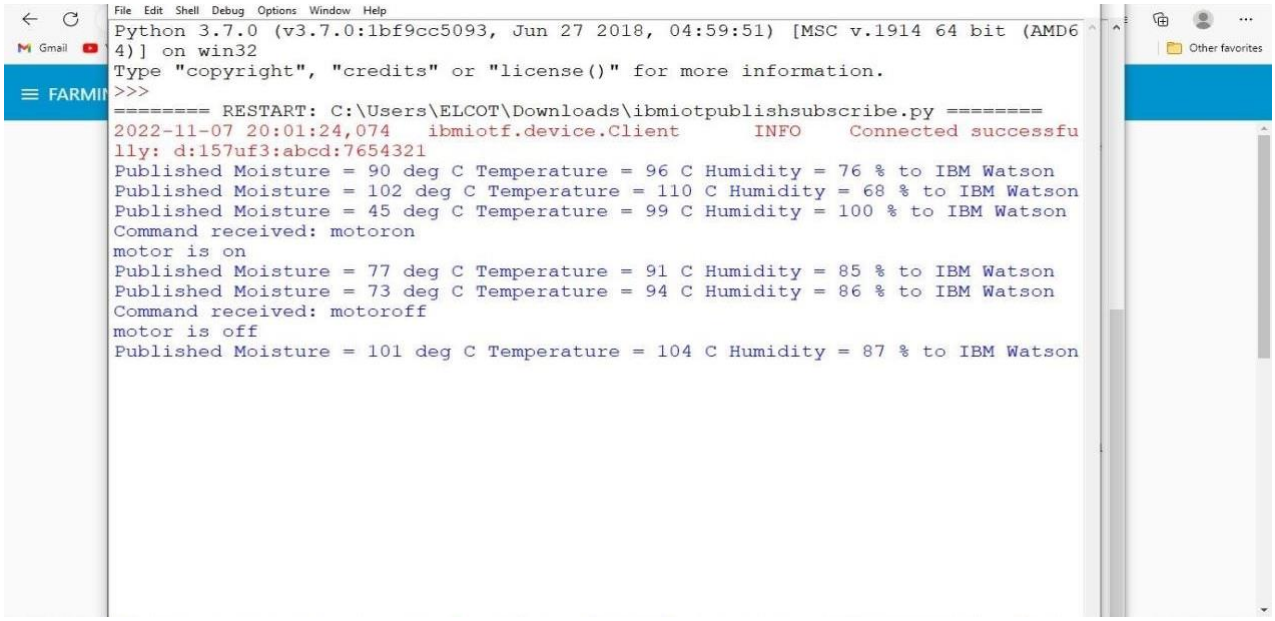
File Edit Shell Debug Options Window Help
Python 3.7.0 (v3.7.0:1bf9cc5093, Jun 27 2018, 04:59:51) [MSC v.1914 64 bit (AMD6
4)] on win32
Type "copyright", "credits" or "license()" for more information.
>>>
======== RESTART: C:\Users\ELCOT\Downloads\ibmiotpublishsubscribe.py ========
2022-11-07 20:01:24,074 ibmiotf.device.Client INFO Connected successfu
lly: d:157uf3:abcd:7654321
Published Moisture = 90 deg C Temperature = 96 C Humidity = 76 % to IBM Watson
Published Moisture = 102 deg C Temperature = 110 C Humidity = 68 % to IBM Watson
Published Moisture = 45 deg C Temperature = 99 C Humidity = 100 % to IBM Watson
Command received: motoron
motor is on
Published Moisture = 77 deg C Temperature = 91 C Humidity = 85 % to IBM Watson
Published Moisture = 73 deg C Temperature = 94 C Humidity = 86 % to IBM Watson
Command received: motoroff
motor is off
Published Moisture = 101 deg C Temperature = 104 C Humidity = 87 % to IBM Watson

Flow Chart

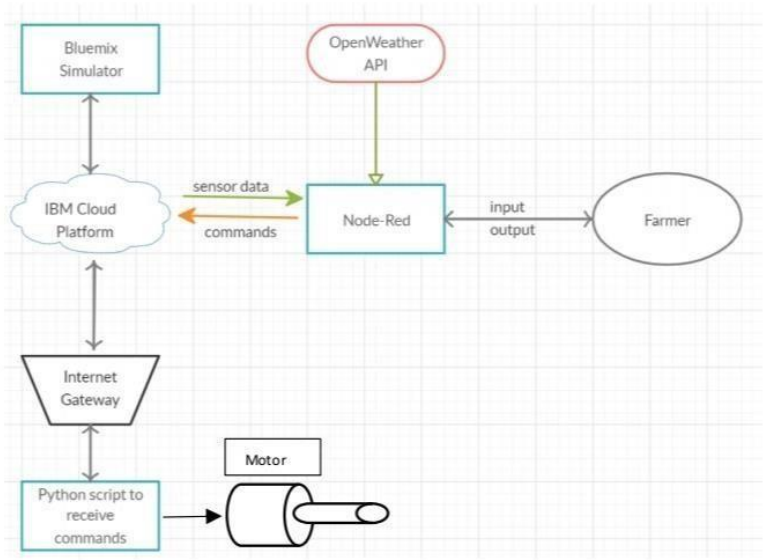
Bluemix Simulator
OpenWeather API
IBM Cloud Platform
sensor data
commands
Node-Red
input
output
Farmer
Internet Gateway
Motor
Python script to receive commands

Observations & Results

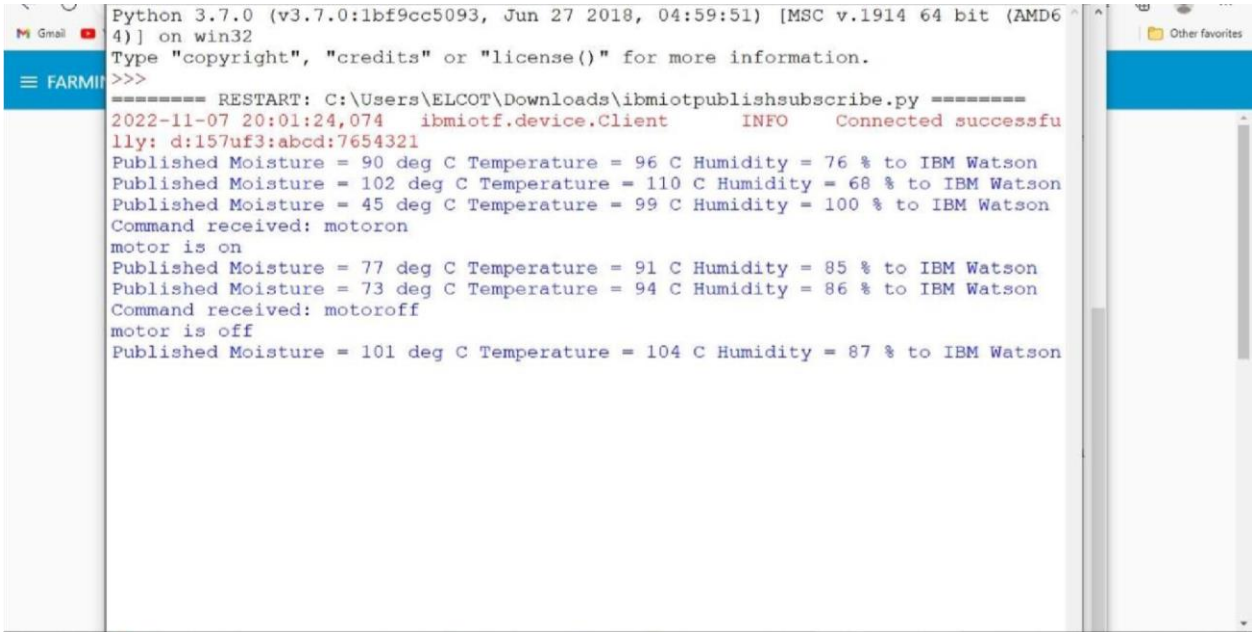

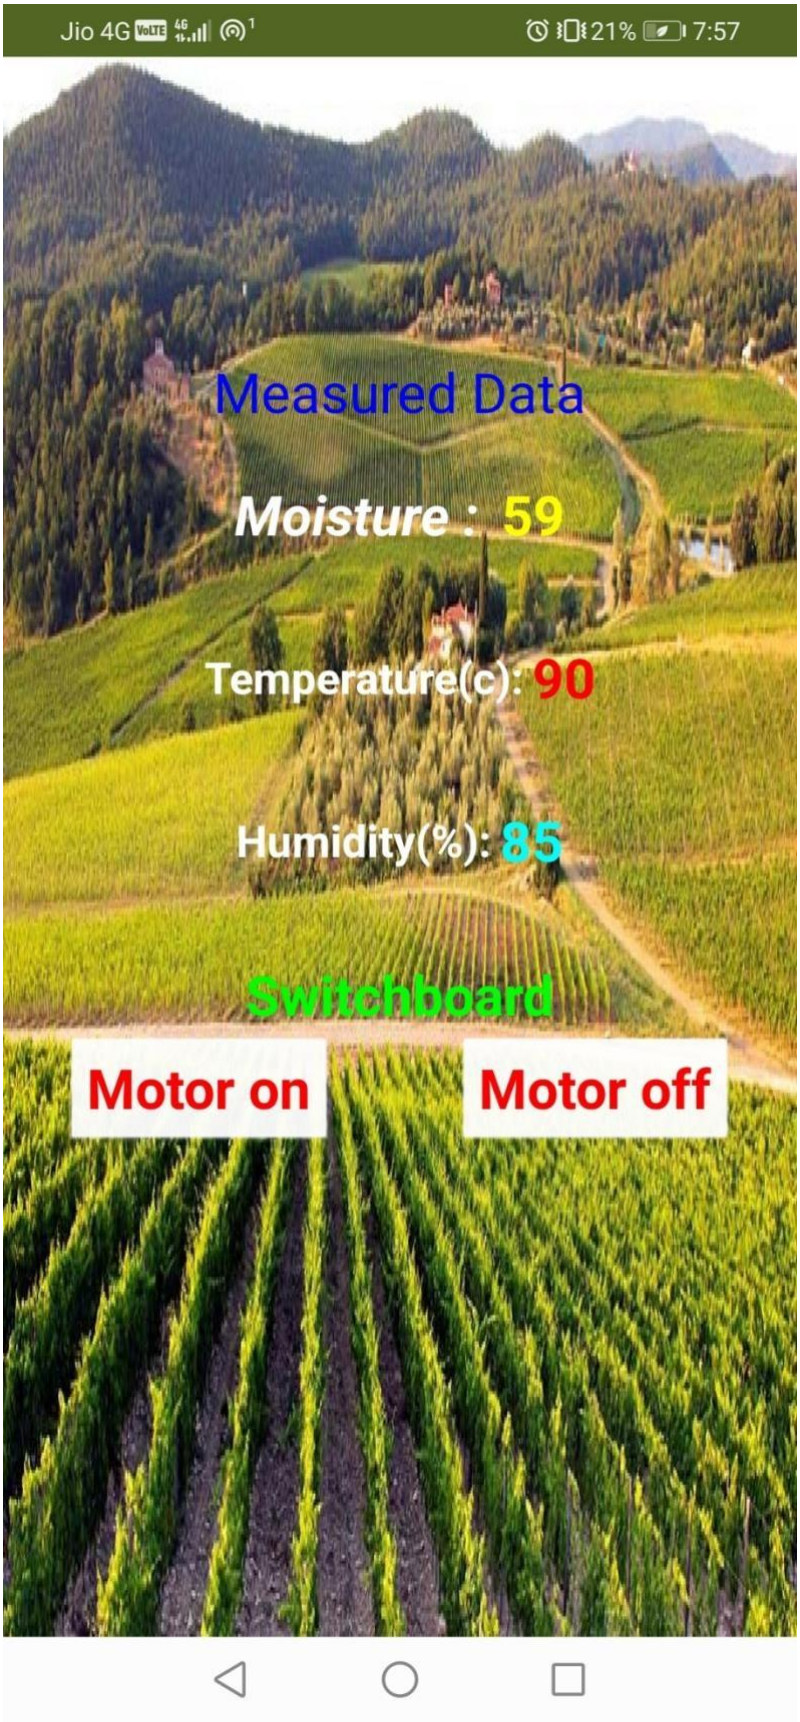
Jio 4G
21%
7:57
Measured Data
Moisture : 59
Temperature(c): 90
Humidity(%): 85
Switchboard
Motor on
Motor off


Gmail
YouTube
Maps
New Tab
Other favorites
FARMING MEASURE DATA
Farming Measure Data
Temperature
110
108
106
104
102
100
98
96
94
92
90
20:01:33
20:01:53
20:02:13
20:02:33
20:02:53
20:03:13
20:03:34
Humidity
91
%
0
100
Moisture
110
100
90
80
70
60
50
40
30
20
20:01:33
20:02:03
20:02:33
20:03:03
20:03:54
Switchboard
MOTOR SWITCH ON
MOTOR SWITCH OFF

Advantages & Disadvantages

Advantages:

- Farms can be monitored and controlled remotely.
- Increase in convenience to farmers.
- Less labor cost.
- Better standards of living.

Disadvantages:

- Lack of internet/connectivity issues.
- Added cost of internet and internet gateway infrastructure.
- Farmers wanted to adapt the use of Mobile App.

Conclusion

Thus the objective of the project to implement an IoT system in order to help farmers to control and monitor their farms has been implemented successfully.

Bibliography

IBM cloud reference: https://cloud.ibm.com/

IoT simulator : https://watson-iot-sensor-simulator.mybluemix.net/

OpenWeather : https://openweathermap.org/