FINAL REPORT

IOT BASED SMART CROP PROTECTION SYSTEM FOR AGRICULTURE

Team ID : PNT2022TMID16680

TEAM MEAMBERS ;-

DINESH . R	***6113192071017***
DHINESH . S	***6113192071016***
AJITHKUMAR . S	***6113192071004***
BALAMURUGAN . A	***6113192071009***
NITHISHKUMAR . T	***611319207105***

TABLE OF CONTENTS

CHAPTER -1

INTRODUCTION

1.1. PROJECT OVREVIEW:

Crops in farms are many times ravagedby local animalslike buffaloes, cows, goats, birds etc. this leads to huge losses for the farmers. It is not possible for farmers tobarricade entire fields or stay on field 24 hours and guard it.so here we proposeautomatic crop protection system from animals. This is a microcontroller based system using PIC family microcontroller. The microcontroller now sound an alarm to woo the animal away fromthe field as well as sends SMS to the farmer so that he may about the issue and come to the spot in case the animal don't turn away by the alarm. This ensures complete safetyof crop from animals thus protecting farmers loss.

1.2. PURPOSE:

Our main purpose of the project is to develop intruder alert to the farm, to avoid losses due to animal and fire. These intruder alert protect the crop that damaging that indirectly increase yield of the crop. The develop system will not harmful and injurious to animal as well as human beings. Theme of project is to design a intelligent security system for farm protecting by using embedded system

CHAPTER - 2

LITERATURE SURVEY

2.1. EXISTING PROBLEM:

The existing system mainly provide the surveillance functionality. Also these system don't provide protection from wild animals, especially in such an application area. They also need to take actions based on the type of animal that tries to enter the area, as different methods are adopted to prevent different animals from entering restricted areas. The other commonly used method by farmer in order to prevent the crop vandalization by animals include building physical barriers, use of electric fences andmanual surveillance andvarious such exhaustive and dangerous method.

2.2. REFERENCES:

i. Mr.Pranav shitap, Mr.Jayesh redij, Mr.Shikhar Singh, Mr.Durvesh Zagade, Dr. Sharada Chougule. Department of ELECTRONICS AND TELECOMMUNICATION ENGINEERING, Finolex Academy of Management and technology, ratangiri, India.

ii. N.Penchalaiah, D.Pavithra, B.Bhargavi, D.P.Madhurai, K.EliyasShaik,S.Md.sohaib.Assitant Professor, Department of CSE,AITS, Rajampet,India UG Student, Department of CSE,AITS,Rajampet, India.

iii. Mr.P.Venkateswara Rao, Mr.Ch Shiva Krishna ,MR M Samba Siva ReddyLBRCE,LBRCE,LBRCE.

iv. Mohit Korche,Sarthak Tokse, ShubhamShirbhate, Vaibhav Thakre,S. P. Jolhe(HOD). Students , Final Year,Dept.of Electrical engineering,Government College of engineering,Nagpur head of dept.,Electrical engineering,Government College of engineering,Nagpur.

2.3. PROBLEM STATEMENT DEFINITION STATEMENT:

In the world economyof many Countrydependent upon the agriculture.

In spite of economic development agriculture is the backbone of the economy. Crops in forms are many times ravaged by local animals like buffaloes, cows, goats, birds and fire etc. this leads to huge loss for the farmers.it is not possible for farmers to blockade to entire fields or stay 24 hours and guard it. Agriculture meets food requirements of the people and produces several raw materialsfor industries. But because of animal interference and fire in agricultural lands, there will be huge loss of crops.Crops will be totally getting destroyed.

CHAPTER -3

IDEATION AND PROPOSED SOLUTION

3.1. EMPATHY MAP CANVAS:

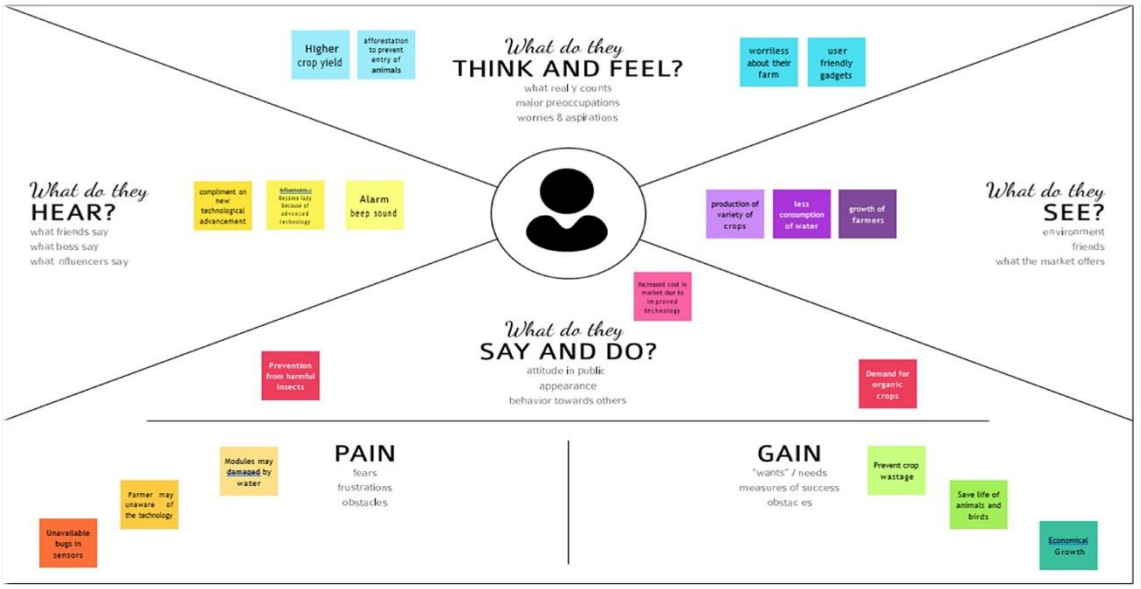

FIGURE No.3.1. EMPATHY MAP CANVAS

3.2. IDEATION AND BRAINSTORMING:

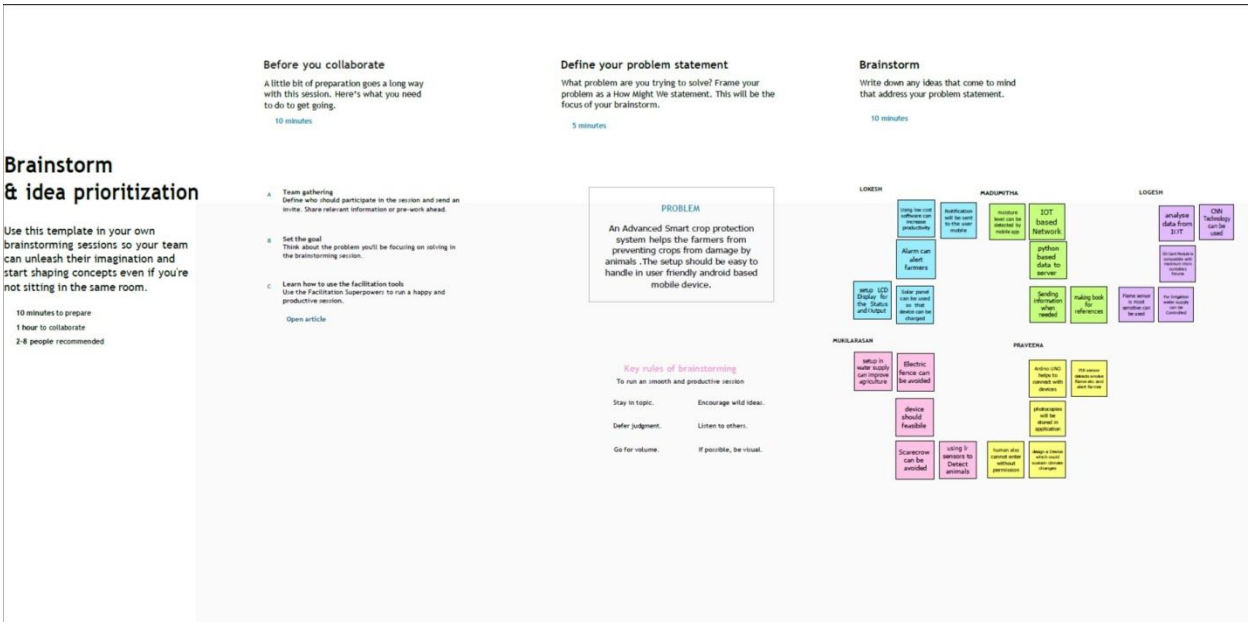

FIGURE No . 3.2.IDEATION & BRAINSTORM

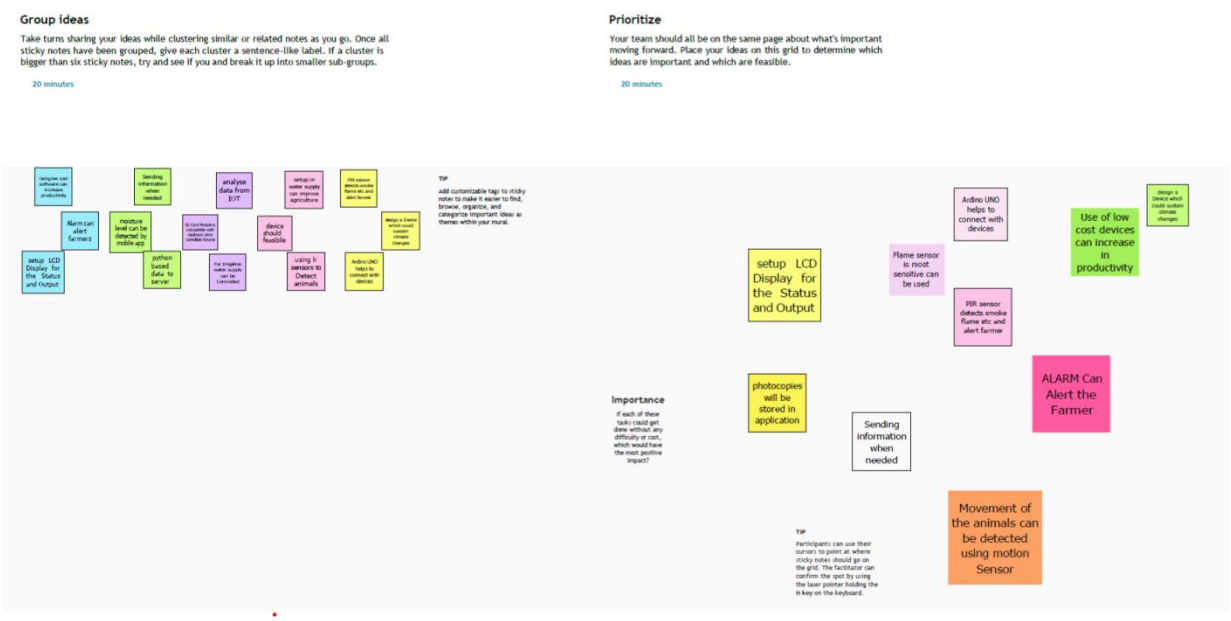

3.3. PROPOSED SOLUTION:

S.NO.	Parameter	Description
1.	Problem Statement. (Problem to be solved)	✓ Crops are not irrigated properly due to insufficient labour forces. ✓ Improper maintenance of crops against various environmental factors such as temperature climate, topography and soil quantity which results in crop destruction. ✓ Requires protecting crops from wild animals attacks birds and pests.
2.	Idea /Solution Description.	✓ Moisture sensor is interfaced with Arduino Microcontroller to measure the moisture level in soil and relay is used to turn ON & OFF the motor pump for managing the excess water level. It will be updated to authorities through IOT. ✓ Temperature sensor connected to microcontroller is used to monitor the temperature in the field. ✓ Image processing techniques with IOT is followed for crop protection against animal attack.
3.	Novelty / Uniqueness.	✓ Automatic crop maintenance and protection using embedded and IOT Technology.
4.	Social Impact / Customer satisfaction.	✓ This proposed system provides many facilities which helps the farmers to maintain the crop field without much loss.
5.	Business Model (Revenue Model).	✓ This prototype can be developed as product with minimum cost with high performance.
6.	Scalability of the solution	✓ This can be developed to a scalable product by using solution sensors and transmitting the data through Wireless Sensor Network and Analysing the data in cloud and operation is performed using robots.

TABLE No.3.1.PROPOSED SOLUTION

3.4. PROBLEM SOLUTIONFIT:

ProjectTitle:IOT Based Smart Crop Protection System for Agriculture

Project DesignPhase-I.SolutionFit

TeamID:PNT2022TMID20130

Define CS, fit into CL

1. CUSTOMER SEGMENT(S) CS

- Farmers who trying to protect crops from various problems

6. CUSTOMER LIMITATIONS EG. BUDGET, DEVICES CL

- Limited supervision.
- Limited financial constrains.
- Lack of manpower.

5. AVAILABLE SOLUTIONS PLUSES & MINUSES AS

- Automation in irrigation.
- CCTVcamera tomonitor andnsupervise thebcrops.
- Alarmnsystem to give alert while animals attacks the crops.

Explore AS, differentiate

Focus on PR, tap into BE, understand RC

2. PROBLEMS / PAINS + ITS FREQUENCY PR

- Cropsarenotirrigatedproperly.
- Improper maintenance of crops.
- Lack of knowledge among farmers inusage offertilizers and hence crops are affected.
- Requires protecting crops from Wild animals attacks,birds and pests.

9. PROBLEM ROOT / CAUSE RC

- Due to in sufficient labourforces. Due to various environmental factors such as temperature climate,to pography and soilquality which results incrop destruction.
- Due to high ammonia,urea, potassium and highPHlevelfertilizers.

7. BEHAVIOR + ITS INTENSITY BE

- Asks suggestions from surrounding peoples and implement there cent technologies.
- Consumes more time in cropland.
- Searching for an alternative solution for anexistingsolution.

Focus on PR, tap into BE, understand RC

Identify strong TR & EM

3. TRIGGERS TO ACT TR

- By seeing surrounding cropland with installing machineries.
- Hearing aboutinnovativetechnologies andeffective solutions.

4. EMOTIONS BEFORE / AFTER EM

- Mentalfrustrations due to insufficient production of crops.
- Felt smart enough to follow the available technologies with minimum cost.

10. YOUR SOLUTION SL

- Moisture sensor interfaced withArduinoMicrocontroller to measure the moisture level in soil and relay isused toturn ON and OFF the motorpump for managing the excess waterlevel. It will be updated to authorities through IOT.
- Temperature sensor connected to microcontroller isused to monitor the temperature inthe field. The optimum temperature required for crop cultivation is maintained using . IOT basedfertilizingmethodsare followed,to minimize the negative effects on growth of crops while using fertilizers .
- Image processing techniques with IOT isfollowed forcrop protection agains animalattacks.

8. CHANNELS of BEHAVIOR CH

ONLINE

- Usingdifferentplatforms/socialmedia to describe th eworking and uses of smart crop protection device.

OFFLINE

Giving awarenes among farmers about the application of the device.

Extract online & offline CH of BE

TABLE No 3.2. PROBLEM SOLUTIONFIT

CHAPTER -4

REQUIREMENT ANALYSIS

4.1. FUNCTIONAL REQUIREMENT:

S.NO.	Functional Requirement.	Sub Requirement.
1.	User Visibility	Sense animals nearing the crop field & sounds alarm to woo them away as well as sends SMS to farmer using cloud service.
2.	User Reception	The Data like values of Temperature, Humidity, Soil moisture Sensors are received via SMS.
3.	User Understanding	Based on the sensor data value to get the information about the present of farming land.
4.	User Action	The User needs take action like destruction of crop residues, deep plowing, crop rotation, fertilizers, strip cropping, scheduled planting operations.

4.2. NON FUNCTINAL REQUIREMENT:

S.NO.	Non-Functional Requirement.	Description.
1.	Usability	Mobile Support Users must be able to interact in the same roles & tasks on computers & mobile devices where practical, given mobile capabilities.
2.	Security	Data requires secure access to must register and communicate securely on devices and authorized users of the system who exchange information must be able to do.
3.	Reliability	It has a capacity to recognize the disturbance near the field and doesn't give a false caution signal.
4.	Performance	Must provide acceptable response times to users regardless of the volume of data that is stored and the analytics that occurs in background. Bidirectional, near real-time communications must be supported. This requirement is related to the requirement to support industrial and device protocols at the edge.
5.	Availability	IOT Solutions and domains demand highly available systems for 24 x 7 operations. Isn't a critical production application, which means that operations or productiondon't go down if the IOT solution is down.
6.	Scalability	System must handle expanding load & data retention needs that are based on the upscaling of the solution scope, such as extra manufacturing facilities and extra buildings.

CHAPTER – 5

PROJECT DESIGN

5.1. DATA FLOW DIAGRAM:

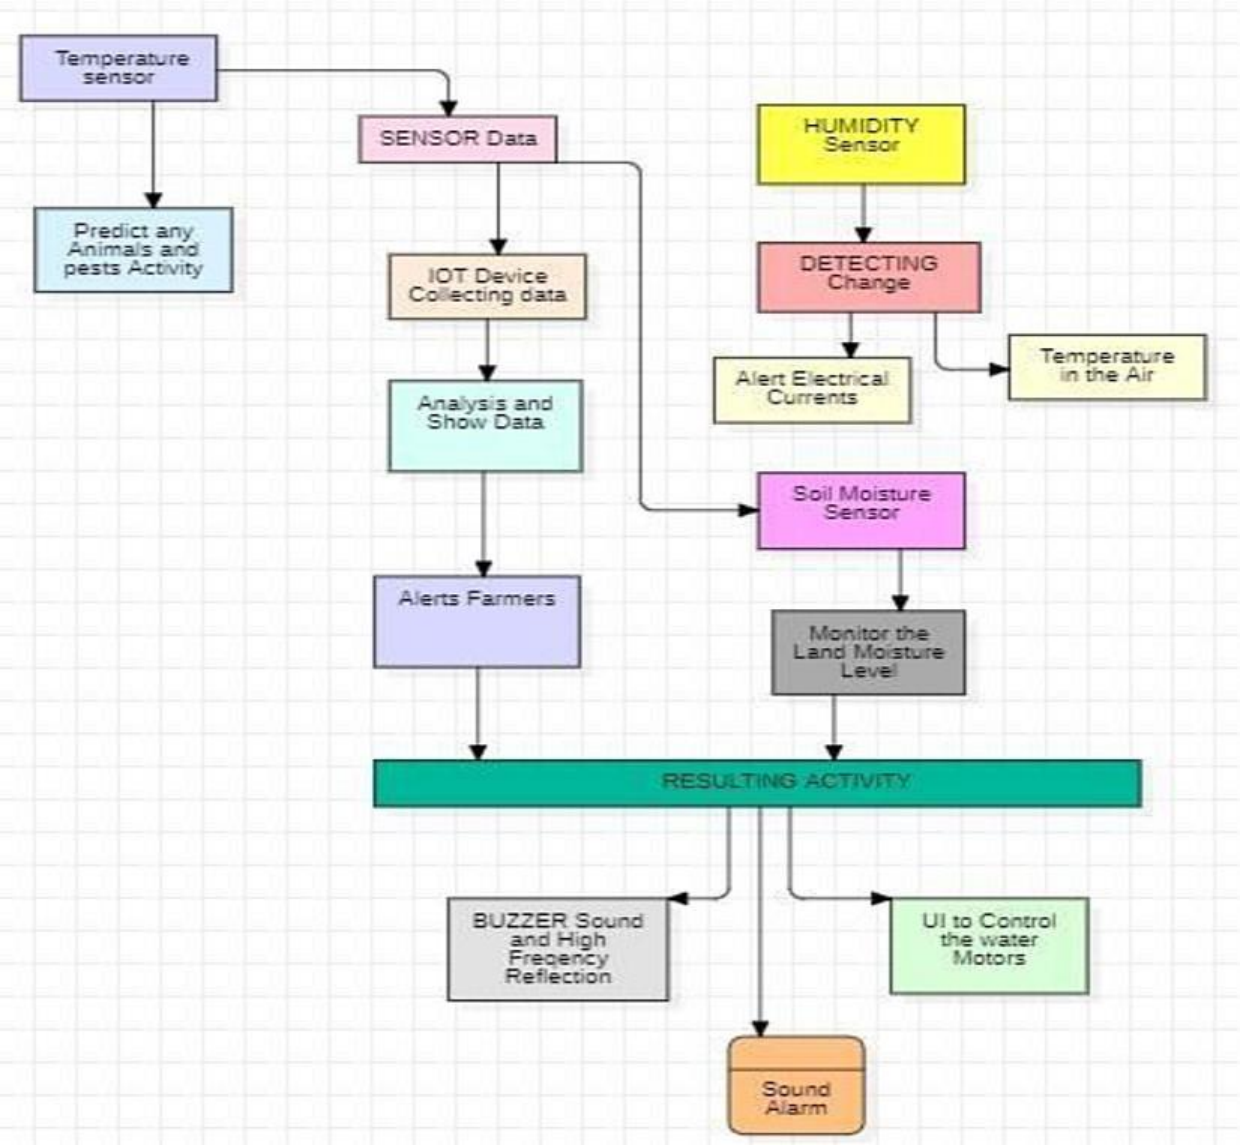

5.2. SOLUTION AND TECHNICAL ARCHITECTURE:

a.

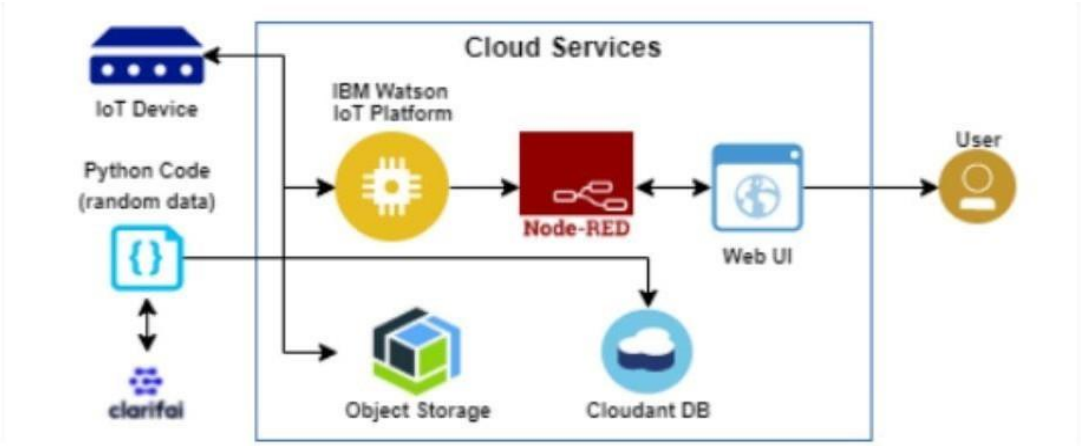

TABLE-1:

sno	components	description	Technology
1	User interface	Interacts with iot device	Html,css,angular js etc..
2	Application logic-1	Logic for a process in the application	Python
3	Application logic-2	Logic for process in the application	Clarifai
4	Application logic-3	Logic for process in the application	IBM Waston Iot platform
5	Application logic-4	logic for the process	Node red app service
6	User friendly	Easily manage the net screen appliance	Web uI

TABLE-2: APPLICATION AND CHARACTERISTICS

sno	Characteristics	Description	Technology
1	Open source framework	Open source framework used	Python
2	Security implementations	Authentication using encryption	Encryptions
3	Scalable architecture	The scalability of architecture consists of 3 models	Web UI Application server-python, clarifai Database server-ibm cloud services.
4	Availability	It is increased by cloudant database	IBM cloud services

5.3. USER STORIES:

SPRINT	FUNCTIONAL REQUIREMENT	USER STORY NUMBER	USER STORY/TASK	STORY POINTS	PRIORITY
Sprint-1		US-1	Create the IBM Cloud services which are being used in this project.	7	high
Sprint-1		US-2	Create the IBM Cloud services which are being used in this project.	7	high
Sprint-2		US-3	IBM Watson IoT platform acts as the mediator to connect the web application to IoT devices, so create the IBM Watson IoT platform.	5	medium
Sprint-2		US-4	In order to connect the IoT device to the IBM cloud, create a device in the IBM Watson IoT platform and get the device credentials	6	high
Sprint-3		US-1	Configure the connection security and create API keys that are used in the Node-RED service for accessing the IBM IoT Platform.	10	high
Sprint-3		US-3	Create a Node-RED service	8	high
Sprint-3		US-2	Develop a python script to publish random sensor data such as temperature, moisture, soil and humidity to the IBM IoT platform	6	medium
Sprint-3		US-1	After developing python code, commands are received just print the statements which represent the control of the devices.	8	high
Sprint-4		US-3	Publish Data to The IBM Cloud	5	high
Sprint-4		US-2	Create Web UI in Node- Red	8	high
Sprint-4		US-1	Configure the Node-RED flow to receive data from the IBM IoT platform and also use Cloudant DB nodes to store the received sensor data in the cloudant DB	6	high

CHAPTER - 6

PROJECT PLANNINGAND SCHEDULING

6.1. SPRINT PLANNINGAND ESTIMATION:

Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed (as on Planned End Date)	Sprint Release Date (Actual)
Sprint-1	20	6 Days	24 Oct 2022	29 Oct 2022	20	29 Oct 2022
Sprint-2	20	6 Days	31 Oct 2022	05 Nov 2022	20	05 Nov 2022
Sprint-3	20	6 Days	07 Nov 2022	12 Nov 2022	20	12 Nov 2022
Sprint-4	20	6 Days	14 Nov 2022	19 Nov 2022	20	19 Nov 2022

Velocity:
Imagine we have a 10-day sprint duration, and the velocity of the team is 20 (points per sprint). Let's calculate the team's average velocity iteration unit (story points per day)

$$AV = \frac{sprint\ duration}{velocity} = \frac{20}{10} = 2$$

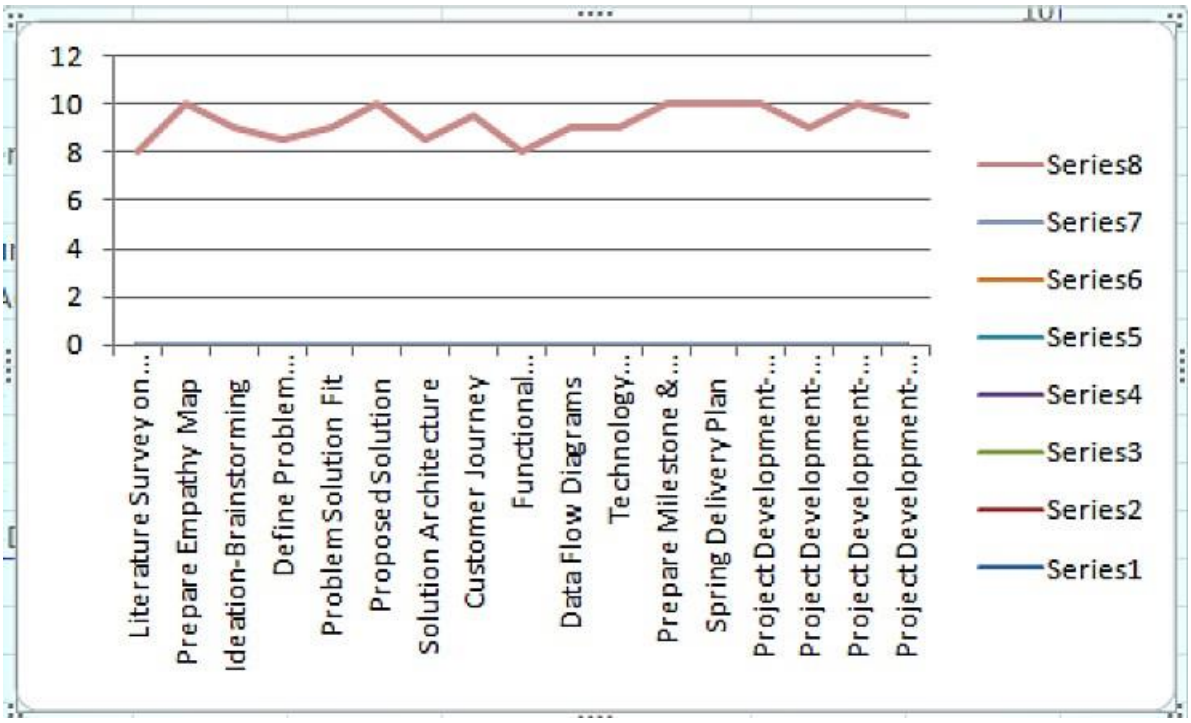

CHAPTER - 7

CODING AND SOLUTIONING

7.1. FEATURE-1

```
import random
import
ibmiotf.applicatio
n import
ibmiotf.device
from time import
sleep import sys
#IBM Watson Device
Credentials.
organization =
"op701j" deviceType =
"Lokesh"
deviceId =
"Lokesh89"
authMethod =
"token"
authToken =
"1223334444"
def myCommandCallback(cmd):
 print("Command received: %s" %
 cmd.data['command'])
 status=cmd.data['command']
 if
   status=="sprink
   ler_on": print
   ("sprinkler is
   ON")
 else :

   print ("sprinkler
 is OFF")
 #print(cmd)
```

```
try:
 deviceOptions = {"org": organization, "type": deviceType, "id": deviceId, "auth-method":
 authMethod, "auth-token": authToken} deviceCli = ibmiotf.device.Client(deviceOptions)
except Exception as e:
   print("Caught exception connecting
device: %s" % str(e)) sys.exit()
#Connecting to IBM watson.
deviceCli.co
nnect() while
True:
#Getting values from sensors.
 temp_sensor = round(
 random.uniform(0,80),2)
 PH_sensor =
 round(random.uniform(1,14),3)
 camera = ["Detected","Not Detected","Not Detected","Not Detected","Not Detected","Not Detected",]
 camera_reading = random.choice(camera)
 flame = ["Detected","Not Detected","Not Detected","Not
 Detected","Not Detected","Not Detected",] flame_reading =
 random.choice(flame)
 moist_level =
 round(random.uniform(0,100),2)
 water_level =
 round(random.uniform(0,30),2)

#storing the sensor data to send in json

 format to cloud. temp_data = {

 'Temperature' : temp_sensor }
 PH_data = { 'PH Level' : PH_sensor }
 camera_data = { 'Animal attack' :
 camera_reading} flame_data = {
 'Flame' : flame_reading }
 moist_data = { 'Moisture Level' :
 moist_level} water_data = {
 'Water Level' : water_level}

# publishing Sensor data to IBM Watson for every 5-10 seconds.
 success = deviceCli.publishEvent("Temperature
 sensor", "json", temp_data, qos=0) sleep(1)
 if success:
   print (" .....publish ok ")
 print ("Published Temperature = %s C" % temp_sensor, "to IBM Watson")
```

```
success = deviceCli.publishEvent("PH sensor",
"json", PH_data, qos=0) sleep(1)
if success:
 print ("Published PH Level = %s" % PH_sensor, "to IBM Watson")

success = deviceCli.publishEvent("camera",
"json", camera_data, qos=0) sleep(1)
if success:
 print ("Published Animal attack %s " %
camera_reading, "to IBM Watson") success =
deviceCli.publishEvent("Flame sensor", "json",
flame_data, qos=0) sleep(1)
if success:
 print ("Published Flame %s " % flame_reading, "to IBM Watson")

success = deviceCli.publishEvent("Moisture sensor",
"json", moist_data, qos=0) sleep(1)
if success:
 print ("Published Moisture Level = %s " % moist_level, "to IBM Watson")

 success = deviceCli.publishEvent("Water sensor", "json", water_data, qos=0) sleep(1)

 if success:

 print ("Published Water Level = %s cm" % water_level, "to IBM Watson") print ("")

 #Automation to control sprinklers by present temperature an to send alert message to IBM Watson.


 if (temp_sensor > 35):

 print("sprinkler-1 is ON")

 success = deviceCli.publishEvent("Alert1", "json",{ 'alert1' : "Temperature(%s) is high, sprinkerlers are
 turned ON" %temp_sensor }

 , qos=0) sleep(1)

 if success:

 print( 'Published alert1 : ', "Temperature(%s) is high, sprinkerlers are turned ON" %temp_sensor,"to
 IBM Watson") print("")

 else:

 print("sprinkler-1 is OFF") print("")

 #To send alert message if farmer uses the unsafe fertilizer to crops. if (PH_sensor > 7.5 or PH_sensor <
 5.5):

 success = deviceCli.publishEvent("Alert2", "json",{ 'alert2' : "Fertilizer PH level(%s) is not safe,use
 other fertilizer" %PH_sensor } ,
```

```
qos=0) sleep(1)
if success:
print('Published alert2 : ' , "Fertilizer PH level(%s) is not safe,use other fertilizer" %PH_sensor,"to IBM Watson") print("")
#To send alert message to farmer that animal attack on crops. if (camera_reading == "Detected"):
success = deviceCli.publishEvent("Alert3", "json", { 'alert3' : "Animal attack on crops detected" }, qos=0) sleep(1)
if success:
print('Published alert3 : ' , "Animal attack on crops detected","to

IBM Watson","to IBM Watson") print("")
#To send alert message if flame detected on crop land and turn ON the splinkers to take immediate action.

if (flame_reading == "Detected"):
print("sprinkler-2 is ON")
success = deviceCli.publishEvent("Alert4", "json", { 'alert4' : "Flame is detected crops are in danger,sprinklers turned ON" }, qos=0) sleep(1)
if success:
print( 'Published alert4 : ' , "Flame is detected crops are in danger,sprinklers turned ON","to IBM Watson")

#To send alert message if Moisture level is LOW and to Turn ON Motor-1 for irrigation. if (moist_level < 20):
print("Motor-1 is ON")
success = deviceCli.publishEvent("Alert5", "json", { 'alert5' : "Moisture level(%s) is low, Irrigation started" %moist_level }, qos=0) sleep(1)
if success:
print('Published alert5 : ' , "Moisture level(%s) is low, Irrigation started" %moist_level,"to IBM Watson" ) print("")
#To send alert message if Water level is HIGH and to Turn ON Motor-2 to take water out.

if (water_level > 20):
print("Motor-2 is ON")
```

```
success = deviceCli.publishEvent("Alert6", "json", { 'alert6' : "Water level(%s) is high, so motor is ON to take water out "
%water_level }, qos=0) sleep(1)
if success:
print('Published alert6 : ' , "water level(%s) is high, so motor is ON to take water out " %water_level,"to IBM Watson" ) print("")
#command recived by farmer deviceCli.commandCallback = myCommandCallback
# Disconnect the device and application from the cloud deviceCli.disconnect()
```

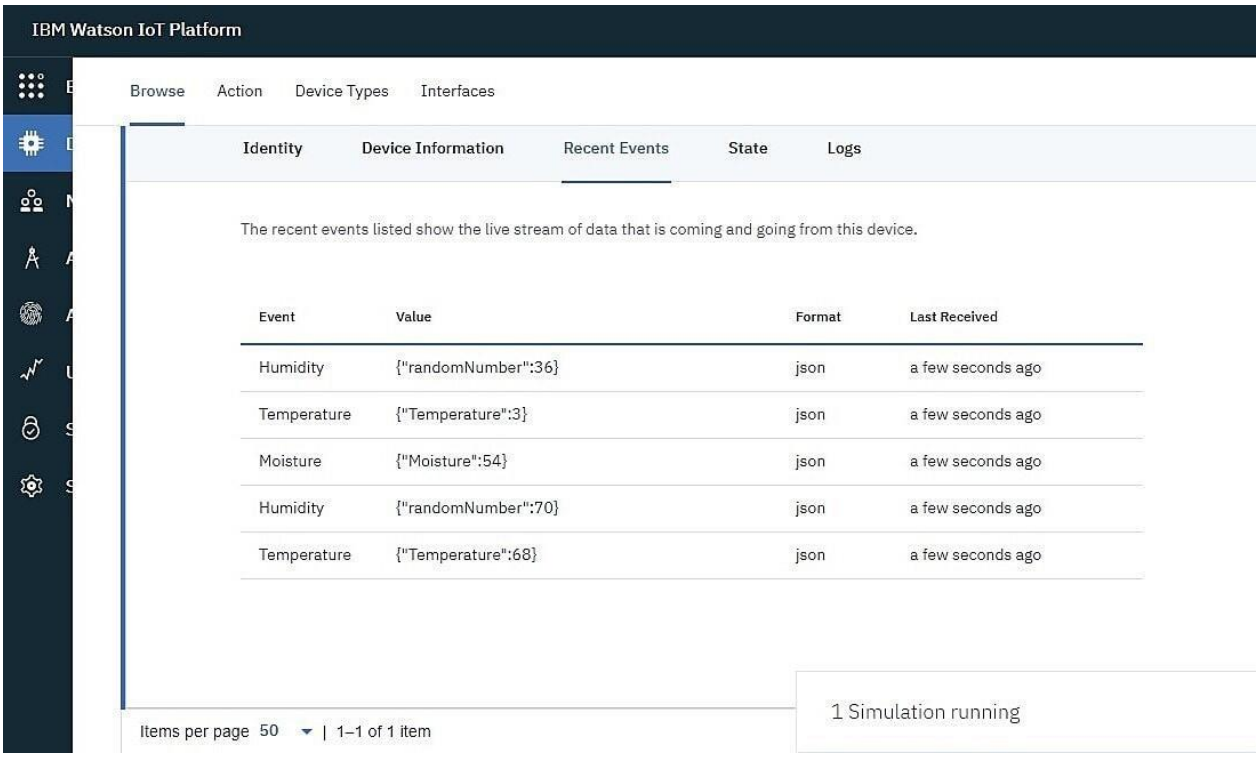

7.2. FEATURES

Output: Digital pulse high (3V) when triggered (motion detected) digital low when idle (no motion detected). Pulse lengths are determined by resistors and capacitors on the PCB and differ from sensor to sensor. Power supply: 5V-12V input voltage for most modules (they have a 3.3V regulator),but 5V is ideal in case the regulator has different specs.

BUZZER

Specifications

- RatedVoltage : 6V DC
- Operating Voltage : 4 to 8V DC
- Rated Current*: ≤30mA

- SoundOutput at 10cm* : ≥85dB
- Resonant Frequency : 2300 ±300Hz
- Tone: Continuous A buzzer is a loud noise maker.
- Most modern ones are civil defense or air- raid sirens, tornado sirens, or the sirens on emergency service vehiclessuch as ambulances, police cars and fire trucks. There are two general types, pneumatic and electronic

.

FEATURE-2:

i. Goodsensitivity to Combustible gas in wide range .
ii. Highsensitivity to LPG, Propane and Hydrogen .
iii. Longlife and low cost.
iv. Simpledrive circuit.

CHAPTER -8

TESTING

8.1. TEST CASES:

sno	parameter	Values	Screenshot
1	Model summary	-	
2	accuracy	Training accuracy-95% Validation accuracy-72%	
3	Confidence score	Class detected-80% Confidence score-80%	

8.2. User Acceptance Testing:

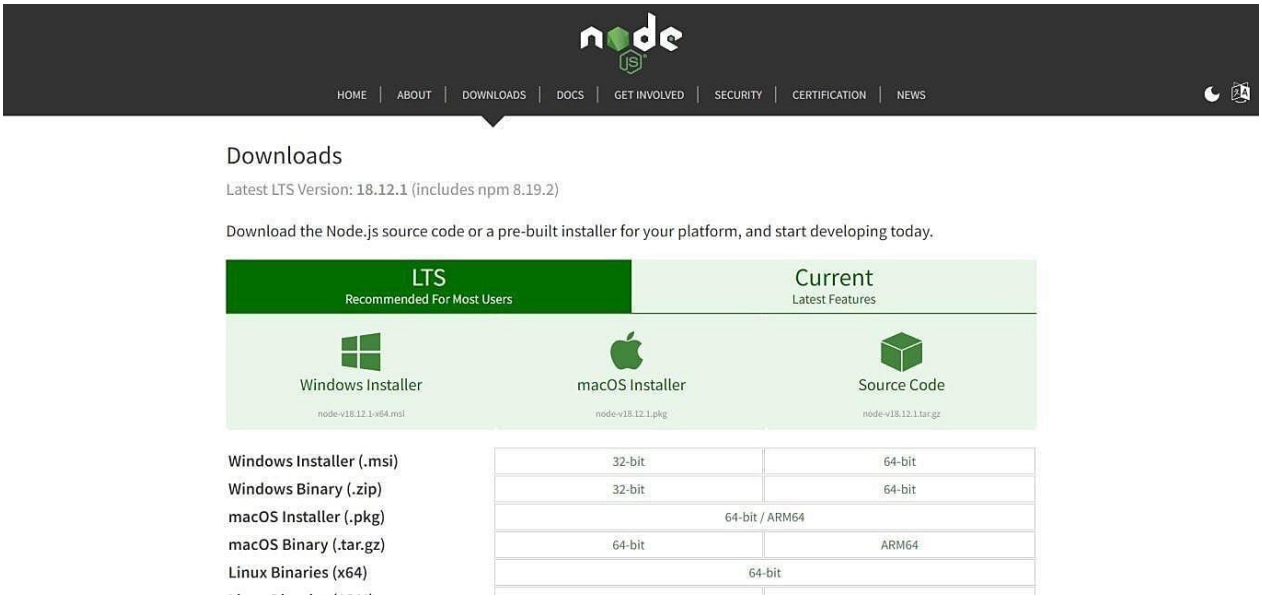

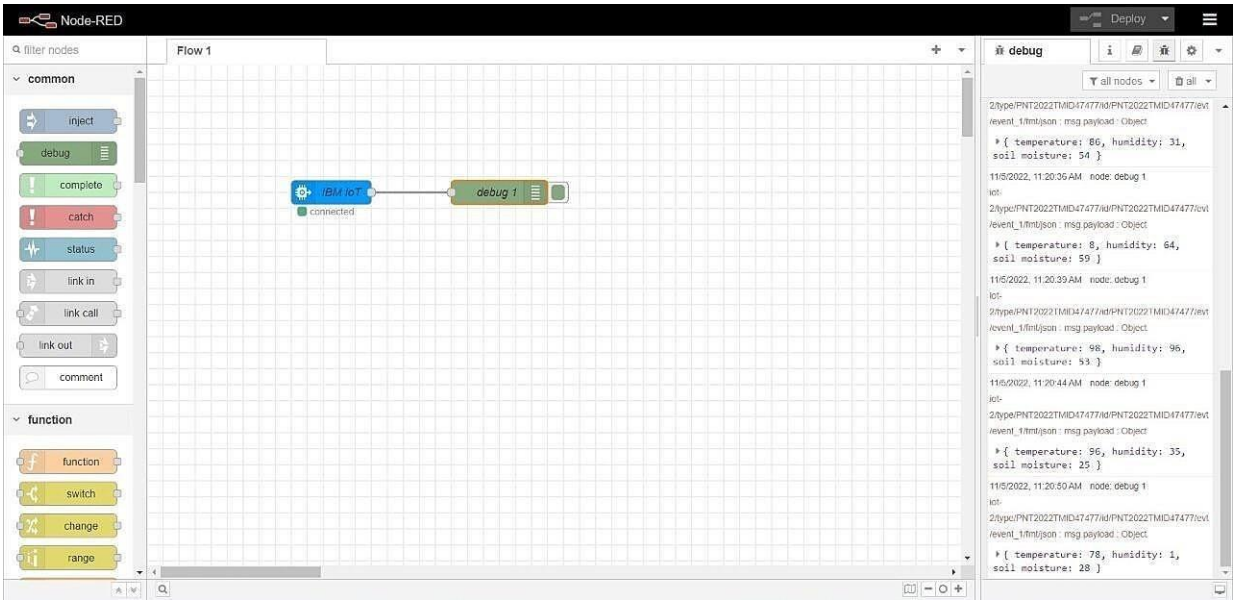

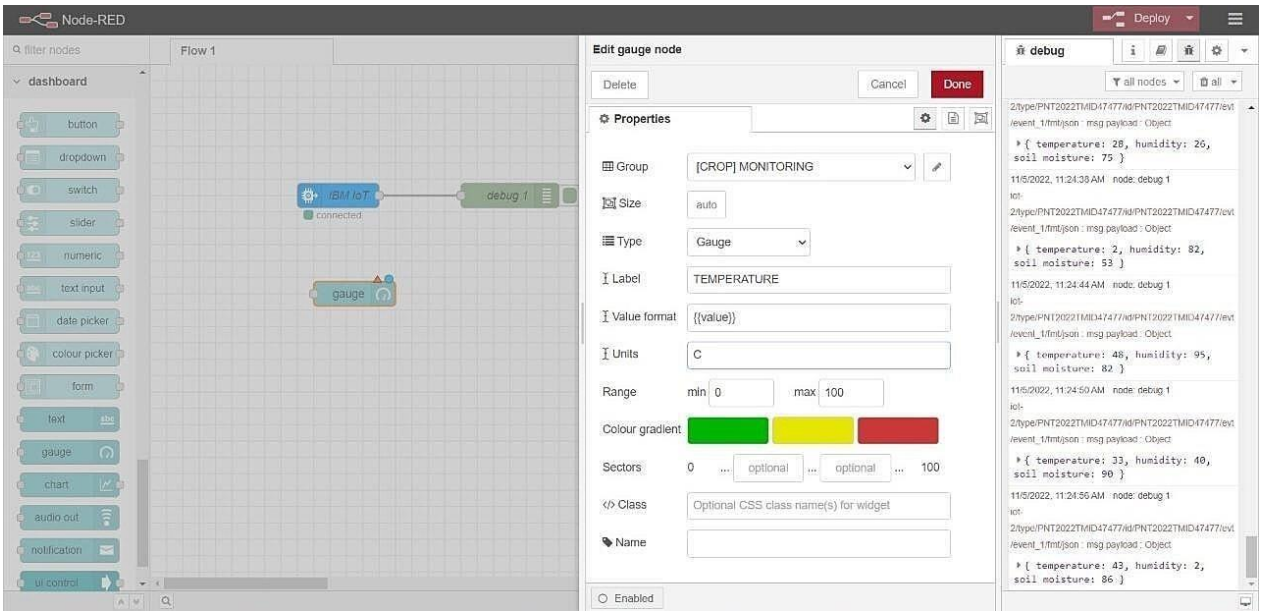
Node-RED
Deploy
Flow 1
dashboard
button
dropdown
switch
slider
numeric
text input
date picker
colour picker
form
text
gauge
chart
audio out
notification
ui control
IBM IoT
connected
debug 1
gauge
Edit gauge node
Delete
Cancel
Done
Properties
Group
[CROP] MONITORING
Size
auto
Type
Gauge
Label
TEMPERATURE
Value format
{{value}}
Units
C
Range
min 0
max 100
Colour gradient
Sectors
0 ... optional ... optional ... 100
Class
Optional CSS class name(s) for widget
Name
Enabled
debug
all nodes
all
{ temperature: 28, humidity: 26, soil moisture: 75 }
11/5/2022, 11:24:38 AM node: debug 1
{ temperature: 2, humidity: 82, soil moisture: 53 }
11/5/2022, 11:24:44 AM node: debug 1
{ temperature: 48, humidity: 95, soil moisture: 82 }
11/5/2022, 11:24:50 AM node: debug 1
{ temperature: 33, humidity: 40, soil moisture: 90 }
11/5/2022, 11:24:56 AM node: debug 1
{ temperature: 43, humidity: 2, soil moisture: 86 }

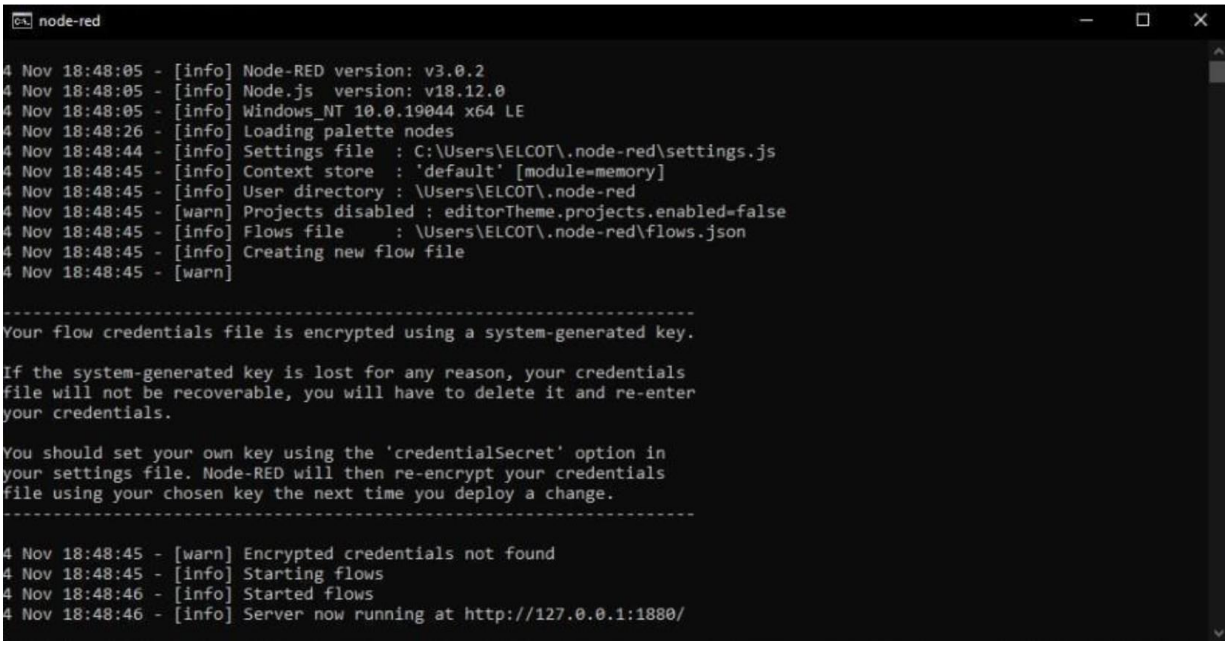
node-red
4 Nov 18:48:05 - [info] Node-RED version: v3.0.2
4 Nov 18:48:05 - [info] Node.js version: v18.12.0
4 Nov 18:48:05 - [info] Windows_NT 10.0.19044 x64 LE
4 Nov 18:48:26 - [info] Loading palette nodes
4 Nov 18:48:44 - [info] Settings file : C:\Users\ELCOT\.node-red\settings.js
4 Nov 18:48:45 - [info] Context store : 'default' [module=memory]
4 Nov 18:48:45 - [info] User directory : \Users\ELCOT\.node-red
4 Nov 18:48:45 - [warn] Projects disabled : editorTheme.projects.enabled=false
4 Nov 18:48:45 - [info] Flows file : \Users\ELCOT\.node-red\flows.json
4 Nov 18:48:45 - [info] Creating new flow file
4 Nov 18:48:45 - [warn]
Your flow credentials file is encrypted using a system-generated key.
If the system-generated key is lost for any reason, your credentials
file will not be recoverable, you will have to delete it and re-enter
your credentials.
You should set your own key using the 'credentialSecret' option in
your settings file. Node-RED will then re-encrypt your credentials
file using your chosen key the next time you deploy a change.
4 Nov 18:48:45 - [warn] Encrypted credentials not found
4 Nov 18:48:45 - [info] Starting flows
4 Nov 18:48:46 - [info] Started flows
4 Nov 18:48:46 - [info] Server now running at http://127.0.0.1:1880/

CHAPTER - 9

RESULTS

The problem of crop vandalization by wild animals andfire has become a major social problem in current time.

It requires urgent attention as no effective solution existstill date for this problem. Thus this project carries a greatsocial relevance as it aims to address this problem. This project willhelp farmers in protecting their orchards and fields and save them from significant financial losses andwill save them from the unproductive efforts that they endure for the protection their fields. This will also help them in achievingbetter crop yields thus leading to theireconomic wellbeing.

CHAPTER - 10

ADVANTAGES AND DISADVANTAGES

ADVANTAGES:

Controllable food supply. you might have droughts or floods, but if you are growing the crops and breeding them to be hardier, you have a better chanceof not straving. It allows farmers to maximize yields using minimum resources such as water,fertilizers.

DISADVANTADES:

The main disadvantage is the time it can take to process the information.in order to keep feeding people as the population grows you have to radically change theenvironment of the planet

CHAPTER – 11

CONCLUSION:

A IoT Web Application is built for smart agricultural system using Watson IoT platform, Watsonsimulator, IBM cloud and Node-RED

CHAPTER – 12

FUTURE SCOPE

In the future, there will be very large scope, this project can be made based on Image processing in which wild animaland fire can be detectedby cameras and if it comes towards farmthen system will be directly activated through wireless networks. Wild animals can also be detected by using wireless networks such as laser wireless sensors and by sensingthis laser or sensor's security system will beactivated**.**

CHAPTER -13

APPENDIX

13.1.SOURCE CODE

```
import time importsys import ibmiotf.application # toinstallpip
install ibmiotf importibmiotf.device



# Provide your IBM Watson Device Credentials organization = "8gyz7t"
# replace the ORG ID deviceType = "weather_monitor" #replace the
Device type deviceId = "b827ebd607b5" # replace Device ID
authMethod = "token" authToken = "LWVpQPaVQ166HWN48f" #
Replace the authtoken



def myCommandCallback(cmd):  # function for Callbackif



    cm.data['command'] == 'motoron':



print("MOTOR ON IS RECEIVED")

elif cmd.data['command'] == 'motoroff':print("MOTOR OFF IS
RECEIVED")if cmd.command == "setInterval":

else:

if 'interval' not in cmd.data:

  print("Error - command is missing requiredinformation: 'interval'")
```

```
 interval  =  cmd.data['interval']
elif cmd.command == "print":
if 'message' not in cmd.data:
        print("Error  -  commandis  missing  requiredinformation:
        'message'")else:output = cmd.data['message']
        print(output)

try:

deviceOptions = {"org": organization, "type": deviceType, "id": deviceId,"authmethod": authMethod,
"auth-token": authToken}       deviceCli
= ibmiotf.device.Client(deviceOptions)#
.....


exceptException as e:
print("Caught exception connecting device: %s" % str(e))sys.exit()


# Connect and send a datapoint "hello" with value "world" into the cloud as an event oftype "greeting" 10
times
deviceCli.connect()


while True:
deviceCli.commandCallback = myCommandCallback


# Disconnect the device and application from the cloud deviceCli.disconnect()
```

SENSOR.PY

```
import time import
sysimport
ibmiotf.application
importibmiotf.devi
ce
import random


# Provide your IBM Watson Device Credentials organization =
"8gyz7t" # replace the ORG ID deviceType = "weather_monitor"
#replace the Device type deviceId = "b827ebd607b5" # replace
Device ID authMethod = "token" authToken =
"LWVpQPaVQ166HWN48f" # Replace the authtoken

def myCommandCallback(cmd):

print("Command received: %s" % cmd.data['command']) print(cmd)

try:
deviceOptions = {"org": organization, "type": deviceType, "id": deviceId,
"auth-method": authMethod, "auth-token": authToken} deviceCli = ibmiotf.device.Client(deviceOptions)
#.....


exceptException as e:
print("Caught exception connecting device: %s" % str(e))sys.exit()


# Connect and send a datapoint "hello" with value "world" into the cloud as an event oftype "greeting" 10
times
deviceCli.connect()


while True:
temp=random.randint(0,1
```

```
00)
pulse=random.randint(0,100) soil=random.randint(0,100)


data = { 'temp' : temp, 'pulse': pulse ,'soil':soil} #print data   def
myOnPublishCallback():
print ("Published Temperature = %s C" % temp, "Humidity = %s %%" %pulse,"Soil Moisture = %s %%"
% soil,"to IBM Watson")


success = deviceCli.publishEvent("IoTSensor", "json", data, qos=0, on_publish=myOnPublishCallback) if
not success: print("Not connected to
IoTF")time.sleep(1)


deviceCli.commandCallback = myCommandCallback


# Disconnect the device and application from the cloud deviceCli.disconnect()
```

Node-RED FLOW :

[

{

"id":"625574ead9839b

34",

"type":"ibmiotout",

"z":"630c8601c5ac3295",

"authentication":"apiKey",

"apiKey":"ef745d48e395ccc0",

"outputType":"cmd",

"deviceId":"b827ebd607b5",

"deviceType":"weather_monitor",

"eventCommandType":"data",

"format":"json",

"data":"data",

"qos":0,

"name":"IBM

IoT",

"service":"registe

re d","x":680,

"y":220,

"wires":[]

},

{

"id":"4cff18c3274cccc4","type":"ui_button",

"z":"630c8601c5ac3295",

"name":"",

"group":"716e956.00eed6c",

"order":2,

"width":"0",

"height":"0",

"passthru":false, "label":"MotorON",
"tooltip":"",
"color":"",
"bgcolor":"",
"className":"",
"icon":"", "payload":"{\"command\":\"motoron\"}", "payloadType":"str",
"topic":"motoron",
"topicType":"s tr","x":360,
"y":160, "wires":[["625574ead9839b34"]]},
{
"id":"659589baceb4e0b0", "type":"ui_button", "z":"630c8601c5ac3295", "name":"",
"group":"716e956.00eed6c", "order":3,
"width":"0",
"height":"0", "passthru":true, "label":"MotorOF F",
"tooltip":"",
"color":"",
"bgcolor":"",
"className":"",
"icon":"", "payload":"{\"command\":\"motoroff\"}", "payloadType":"str",
"topic":"motoroff",
"topicType":"s tr","x":350,
"y":220,
"wires":[["625574ead9839b34"]]},

{"id":"ef745d48e395ccc0","type":"ibmiot", "name":"weather_monitor","keepalive":"60", "serverName":"",
"cleansession":true, "appId":"",
"shared":false},
{"id":"716e956.00eed6c",
"type":"ui_group",
"name":"Form", "tab":"7e62365e.b7e6b8 ","order":1,

"disp":true,
"width":"6", dashboard ","order":1,
"disabled":false,
"hidden":false}
]

[
{
"id":"b42b5519fee73ee2", "type":"ibmiotin", "z":"03acb6ae05a0c712", "authentication":"apiKey",
"apiKey":"ef745d48e395ccc0",

"inputType":"evt", "logicalInterface":"", "ruleId":"", "deviceId":"b827ebd607b5", "applicationId":"",
"deviceType":"weather_monitor",

"eventType":"+",
"commandType":"",
"format":"json",
"name":"IBMIoT", "service":"registered", "allDevices":"", "allApplications":"", "allDeviceTypes":"",
"allLogicalInterfaces":"", "allEvents":true, "allCommands":"", "allFormats
":"",
"qos":0,
"x":270,
"y":180,
"wires":[["50b13e02170d73fc","d7da6c2f5302ffaf","a949797028158f3f","a71f164bc3 78bcf1"]]
},
{
"id":"50b13e02170d73fc ",
"type":"function",
"z":"03acb6ae05a0c712 ","name":"Soil Moisture",
"func":"msg.payload = msg.payload.soil;\nglobal.set('s',msg.payload);\nreturn msg;", "outputs":1,
"noerr":
0,

"initialize ":"",
"finalize":"",
"libs":[],

"x":490,
"y":120,
"wires":[["a949797028158f3f","ba98e701f55f04fe"]]
},

{
"id":"d7da6c2f5302ffaf","type":"function", "z":"03acb6ae05a0c712", "name":"Humidity",
"func":"msg.payload = msg.payload.pulse;\nglobal.set('p',msg.payload)\nreturn msg;",
"outputs":1,
"noerr":
0,
"initialize ":"",
"finalize":"",
"li bs ":[
],
"x ":
48
0,
"y":260, "wires":[["a949797028158f3f","70a5b076eeb80b70"]]
},
{ "id":"a949797028158f3f ",
"type":"debug",
"z":"03acb6ae05a0c712 ","name":"IBMo/p", "active":true, "tosidebar":true, "console":false,
"tostatus":false, "complete":"payload", "targetType":"msg",
"statusVal":"",
"statusType":"auto", "x":780,
"y":180,
"wires":[]
},

```
{
"id":"70a5b076eeb80b70", "type":"ui_gauge", "z":"03acb6ae05a0c712", "name":"",
"group":"f4cb8513b95c98a4", "order":6,
"width":"0",
"height":"0",
"gtype":"gage",
"title":"Humidity",
"label":"Percentage(%)",
"format":"{{value}}
","min":0,
"max":"100", "colors":["#00b500","#e6e600","#ca3838"], "seg1":"", "seg2":"",
"classNam e":"","x":86 0,
"y":260,
"wires":[]
},
{
"id":"a71f164bc378bcf1","type":"function", "z":"03acb6ae05a0c712", "name":"Temperature",
"func":"msg.payload=msg.payload.temp;\nglobal.set('t',msg.payload);\nreturn msg;","outputs":1, "noerr":
0,
"initialize ":"",
"finalize":"",
"li bs ":[
],
"x ":
49
0, "y":360,

"wires":[["8e8b63b110c5ec2d","a949797028158f3f"]]
},
{
"id":"8e8b63b110c5ec2d", "type":"ui_gauge", "z":"03acb6ae05a0c712", "name":"",
"group":"f4cb8513b95c98a4", "order":11,
"width":"0",
"height":"0",
```

"gtype":"gage", "title":"Temperature", "label":"DegreeCelcius", "format":"{{value}}", "min":0,
"max":"100", "colors":["#00b500","#e6e600","#ca3838"],"seg1":"", "seg2":"",
"className ":"",
"x":790,
"y":360,
"wires":[]
},
{
"id":"ba98e701f55f04fe", "type":"ui_gauge",
"z":"03acb6ae05a0c712", "name":"", "group":"f4cb8513b95c98a4", "order":1,

"width":"0",
"height":"0",
"gtype":"gage",

"title":"Soil Moisture", "label":"Percentage(%)",
"format":"{{value}}
","min":0,
"max":"100", "colors":["#00b500","#e6e600","#ca3838"],"seg1":"", "seg2":"",
"className ":"",
"x":790,
"y":120,
"wires":[]
},
{
"id":"a259673baf5f0f98 ","type":"httpin", "z":"03acb6ae05a0c712 ","name":"",
"url":"/sensor",
"method":"ge t", "upload":fals e, "swaggerDoc"
:"","x":370, "y":500,
"wires":[["18a8cdbf7943d27a"]]
},
{
"id":"18a8cdbf7943d27a","type":"function", "z":"03acb6ae05a0c712", "name":"httpfunction",
"func":"msg.payload{\"pulse\":global.get('p'),\"temp\":global.get('t'),\"soil\":global.get('s')};\nreturn

msg;",
"outputs":1,
"noerr":0,

"initialize":"",
"finalize":"", "li
bs
":[
],
"x ":
63
0,
"y":500, "wires":[["5c7996d53a445412"]]
},
{ "id":"5c7996d53a445412 ",
"type":"httpresponse",
"z":"03acb6ae05a0c712 ","name":"",
"statusCode":"",
"header s":{},
"x":870,
"y":500,
"wires":[]
},
{
"id":"ef745d48e395ccc0", "type":"ibmiot", "name":"weather_monitor", "keepalive":"60",
"serverName":"",
"cleansession":true, "appId":"",
"shared":false},
{

"id":"f4cb8513b95c98a4","type":"ui_group", "name":"monitor",
"tab":"1f4cb829.2fdee8 ","order":2,
"disp":
true, "width ":"6",

"collapse":f alse, "className ":""
},
{
"id":"1f4cb829.2fdee8",
"type":"ui_tab",
"name":"Home",
"icon":"dashboard ","order":3, "disabled":false, "hidden":false }
"collapse":fal se},
{"id":"7e62365e.b7e6b8",
"type":"ui_tab",
"name":"contorl",
"icon":"

13.2. GitHub & Project Demo Link

https://github.com/IBM-EPBL/IBM-Project-20310-1659716920