SMOKE ALARAM SYSTEM

C

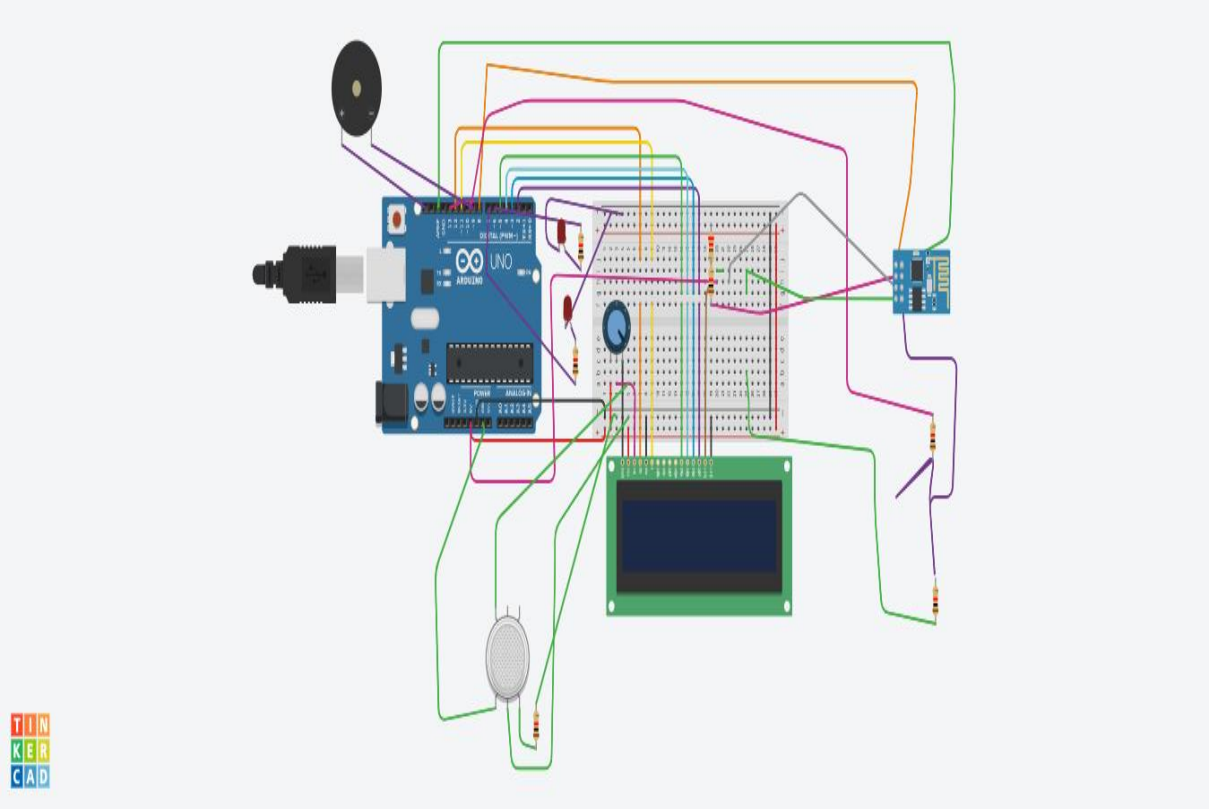

C CODE FOR SMART ALARAM SYSTEM

```
#include
<SoftwareSerial.h>
                    #include <LiquidCrystal.h>


                    // initialize the library with the numbers of the interface pins
                    LiquidCrystal lcd(12, 11, 5, 4, 3, 2); // LCD Connections
                    SoftwareSerial SerCommESP8266(8,9); // RX, TX  connect 8 to TX of
                    ESP, connect 9 to RX of ESP


                    int smokeVal=0;
                    int smoke_sensor_pin=A0; // MQ2 Gas Sensor
                    int red_led_pin=7;  // Smoke indication
```

```
int green_led_pin=6; // No Smoke indication
int buzzer_pin = 10; // Buzzer


String apiKey = "2TDYYE99BAABM1P8";  // Write API key


void setup()
{
  pinMode(red_led_pin, OUTPUT);
  pinMode(green_led_pin, OUTPUT);
  pinMode(buzzer_pin, OUTPUT);
  pinMode(smoke_sensor_pin, INPUT);
  Serial.begin(9600); //  serial data transmission at Baudrate of
9600
  SerCommESP8266.begin(9600);   // Initialize the serial
communication baud rate

  lcd.begin(16, 2);  // to intialize LCD
  lcd.setCursor(0,0);
  lcd.print("    Welcome");
  lcd.setCursor(0,1);
  lcd.print("       To        ");
  delay(1000);
  lcd.clear();
  lcd.setCursor(0,0);
  lcd.print("   Technical");
  lcd.setCursor(0,1);
  lcd.print("     Update");
  delay(1000);
  SerCommESP8266.println("AT");  // Start ESP8266 Module
  delay(1000);
  SerCommESP8266.println("AT+GMR"); // To view version info for
ESP-01 output: 00160901 and ESP-12 output: 0018000902-AI03
  delay(1000);
  SerCommESP8266.println("AT+CWMODE=3"); // To determine WiFi mode
  delay(1000);
  SerCommESP8266.println("AT+RST"); // To restart the module
  delay(1000);
  SerCommESP8266.println("AT+CIPMUX=1"); // Enable multiple
connections 0: Single connection  1: Multiple connections (MAX 4)

  delay(1000);
  String cmd="AT+CWJAP=\"SSID NAME\",\"SSID PASSWORD\""; // connect
to Wi-Fi
  SerCommESP8266.println(cmd);
```

```
  delay(1000);
  SerCommESP8266.println("AT+CIFSR"); // Return or get the local IP
address
  delay(1000);
  lcd.clear();
  lcd.setCursor(0,0);
  lcd.print("     WIFI");
  lcd.setCursor(0,1);
  lcd.print("  CONNECTED");
}



void loop()
{
  delay(1000);
  smokeVal = map(analogRead(A0),10,350,0,100);
  Serial.println();
  lcd.clear();
  lcd.setCursor (0, 0);
  lcd.print (smokeVal);
  lcd.print (" In Room");
  lcd.setCursor (0,1);
  if (smokeVal>30)
   {
    lcd.print("Smoke Detected");
    Serial.print("Smoke Detected");
    digitalWrite(red_led_pin, HIGH);
    digitalWrite(green_led_pin, LOW);
    tone(buzzer_pin, 1000, 200);
   }
  else
   {
    lcd.print("Safe");
    Serial.print("Safe");
    digitalWrite(red_led_pin, LOW);
    digitalWrite(green_led_pin, HIGH);
    noTone(buzzer_pin);
   }
  delay(1000);
  lcd.clear();
  lcd.setCursor(0,0);
  lcd.print("  SENDING DATA");
  lcd.setCursor(0,1);
  lcd.print("     TO CLOUD");
  SetupESP8266_HA(); // For ThingSpeak Data Transfer
```

```
  delay(1000);
}


void SetupESP8266_HA()
{
   // TCP connection AT+CIPSTART=4,"TCP","184.106.153.149",80
    String cmd = "\nAT+CIPSTART=4,\"TCP\",\"";  // Establish TCP
connection
    cmd += "184.106.153.149"; // api.thingspeak.com
    cmd += "\",80"; // Port Number
    SerCommESP8266.println(cmd);
    Serial.println(cmd);
    if(SerCommESP8266.find("Error"))
    {
      Serial.println("AT+CIPSTART error");
      return;
    }
  String getStr = "GET /update?api_key=";  // API key
  getStr += apiKey;
  getStr +="&field1=";  // Field variable as Smoke
  getStr +=String(smokeVal);
  getStr += "\r\n\r\n";
  // send data length
  cmd = "AT+CIPSEND="; // Send data AT+CIPSEND=id,length
  cmd += String(getStr.length());
  SerCommESP8266.println(cmd);
  Serial.println(cmd);
  delay(1000);
  SerCommESP8266.print(getStr);
  Serial.println(getStr);
  // thingspeak needs max 16 sec delay between updates
  delay(10000);
}



LINK:
                https://www.tinkercad.com/things/8q7fV1pCVyG-copy-
of-wifi-module-esp8266/editel?sharecode=c0p_VyoaCKUg_E1xXxFNcg-
SRRtSS-NS73zsVCUbYGY
```

Footer

Footer navigation

- Terms
- Privacy
- Security
- Status
- Docs
- Contact GitHub
- Pricing
- API
- Training
- Blog
- About