

REAL TIME RIVER WATER MONITORING AND CONTROL SYSTEM

A PROJECT REPORT

Submitted by

Team ID: PNT2022TMID34320

ABINAYA J	960519106004
BHARATHI S	960519106027
SHURTHIKA M	960519106061
SNEKA S	960519106063

TABLE OF CONTENT

CHAPTER NO.	TITLE	PAGE NO.
1.	INTRODUCTION	1
	1.1 Project Overview	
	1.2 Purpose	
2.	LITERATURE SURVEY	3
	2.1 Existing problem	
	2.2 References	
	2.3 Problem Statement Definition	

3.	IDEATION & PROPOSED SOLUTION	7
	3.1 Empathy Map Canvas	
	3.2 Ideation & Brainstorming	
	3.3 Proposed Solution	
	3.4 Problem Solution fit	
4.	REQUIREMENT ANALYSIS	12
	4.1 Functional requirement	
	4.2 Non-Functional requirements	
5.	PROJECT DESIGN	13
	5.1 Data Flow Diagrams	
	5.2 Solution & Technical Architecture	
	5.3 User Stories	
6.	PROJECT PLANNING & SCHEDULING	18
	6.1 Sprint Planning & Estimation	
	6.2 Sprint Delivery Schedule	
	6.3 Reports from JIRA	

7.	CODING & SOLUTIONING	20
	7.1 Feature 1	
	7.2 Feature 2	
8.	TESTING	24
	8.1 Test Cases	
	8.2 User Acceptance Testing	
9.	RESULTS	25

9.1 Performance Metrics

10. **ADVANTAGES & DISADVANTAGES 25**

11. **CONCLUSION 26**

12. **FUTURE SCOPE 26**

13. **APPENDIX 27**

13.1 Source Code

13.2 GitHub and Project Demo Link

CHAPTER 1

INTRODUCTION

1.1 Project Overview

The environment around consists of five key elements e.g., soil, water, climate, natural vegetation, and landforms. Among these water is the utmost crucial element for human life. It is also vital for the persistence of other living habitats. Whether it is used for drinking, domestic use, and food production or recreational purposes, safe and readily available water is the need for public health. So it is highly imperative for us to maintain water quality balance. Otherwise, it would severely damage the health of the humans and at the same time affect the ecological balance among other species.

Water pollution is a foremost global problem which needs ongoing evaluation and adaptation of water resource directorial principle at the levels of international down to individual wells. It has been studied that water pollution is the leading cause of mortalities and diseases worldwide. The records show that more than 14,000 people die daily worldwide due to water pollution. In many developing countries, dirty or contaminated water is being used for drinking without any proper prior treatment. One of the reasons for this happening is the ignorance of public and administration and the lack of water quality monitoring system which makes serious health issues.

In this project, we depict the design of Wireless Sensor Network (WSN) that assists to monitor the quality of water with the support of information sensed by the sensors dipped in water and controlling the algae present in the water. Using different sensors, this system can collect various parameters from water, such as pH, dissolved oxygen, turbidity, conductivity, temperature, and so on. The rapid development of

WSN technology provides a novel approach to real-time data acquisition, transmission, and processing. The clients can get ongoing water quality information from far away. Now a day's Internet of things (IoT) is an innovative technological phenomenon. It is shaping today's world and is used in different fields for collecting, monitoring and analysis of data from remote locations. IoT integrated network is everywhere starting from smart cities, smart power grids, and smart supply chain to smart wearable. Though IoT is still under applied in the field of environment it has huge potential. It can be applied to detect forest fire and early earthquake, reduce air pollution, monitor snow level, prevent landslide, and avalanche etc. Moreover, it can be implemented in the field of water quality monitoring and controlling system.

Water quality monitoring has gained more interest among researchers in this twenty-first century. Numerous works are either done or ongoing in this topic focusing on various aspects of it. The key theme of all the projects was to develop an efficient, cost-effective, real-time water quality monitoring and system which will integrate wireless sensor network and internet of things.

1.2 Purpose

The major goal is to create a system that uses wireless sensor networks to continuously monitor river water quality at remote locations with low power consumption, low cost and high detection accuracy. pH, conductivity, turbidity level and other parameters are measured in order to enhance water quality. The remote sensing technology is the cornerstone of IoT-based water quality monitoring. This implement the approach by using the pH sensor, turbidity sensor to obtain analog readings for water contaminates. In addition, for the specific application, we can add extra sensor elements.

LITERATURE SURVEY

2.1 Existing Problem

- If large amounts of fertilizers or farm waste drain into a river the concentration of nitrate and phosphate in the water increases considerably. Algae use these substances to grow and multiply rapidly turning the water green.
- This massive growth of algae leads to pollution. when the algae die they are broken down by the action of the bacteria which quickly multiply, using up all the oxygen in the water which leads to many problems .
- To avoid those problems, control the algae and monitor the water parameters like PH, temperature in the river water.

2.2 References

1. IOT based Think Speak application for monitoring the quality of the water.

Pasika and Gandla

The monitoring system which consists of a number of sensors used to measure several quality parameters like turbidity, pH value, water level in the tank, dampness of the adjoining environment and temperature of the water. The sensors are interfaced with the Microcontroller Unit (MCU) and additional processing is executed by the Personal Computer (PC). The acquired data will be directed to the cloud by means of Internet of Things (IoT) based Think Speak application for monitoring the quality of the water under test. As a future directive, work should be extended for analyzing some other parameters such as nitrates, electrical conductivity, dissolved oxygen in the water and free residual chlorine.

2. Solar powered water quality monitoring system using WSN.

The idea of ‘Underwater Wireless Sensor Network’ (UWSN) is the basic building block of a water quality monitoring using wireless sensor network (WSN) technology powered by solar panel. To monitor water quality over different sites as a real-time application, an excellent system architecture constituted by distributed sensor nodes and a base station is suggested. The nodes and base station are connected using WSN technology like Zigbee. Design and implementation of a prototype model using one node powered by solar cell and WSN technology is the challenging work. Data collected by various sensors at the node side such as pH, turbidity and oxygen level is sent via WSN to the base station. Data collected from the remote site can be displayed in visual format as well as it can be analyzed using different simulation tools at base station. This novel system has advantages such as no carbon emission, low power consumption, more flexible to deploy at remote site and so on.

3. IOT based Smart Water Quality Monitoring System.

Monjra Mukta, Samia Islam and M.S.H. Khan Published on 1 Feb 2019 (4th ICCCS)

This paper represents an IOT based smart water quality monitoring(SWQM) system aids in continuous measurement of water condition based on four physical parameters i.e., temperature, Ph, electric conductivity and turbidity properties. Four sensors are connected with Arduino-uno in discrete way to detect the water parameters. Extracted data from the sensors are transmitted to a desktop application developed in NET platform and compared with the WHO standard values. Based on the measured result, the proposed SWQM system can successfully analyze the water

parameters using fast forest binary classifier to classify whether the test water sample is drinkable or not.

4. Design and Implementation of Real Time Approach for the Monitoring of Water Quality Parameters.

**Siti Aishah Binti Makhtar, Norhafizah Binti Burham, Anees Bt Abdul Aziz
Published on June 2022 by IEEE**

This presented paperwork is to develop a smart water quality monitoring system using four sensors and an IoT platform to help determine water quality. It is to analyze the parameters of water samples such as tap water, coway water, river water, pond water, and lake water whether these water samples are in the threshold range for drinking or not. The device is initially used to measure pH, turbidity, total dissolved solids (TDS) and temperature, and then sent the information to the microcontroller Arduino Uno. Users can connect the device to a mobile phone via Bluetooth, and then an android-based mobile application called HC-05 Bluetooth Terminal displays real-time test data. These values of each parameter are also displayed on the I2C LCD screen connected to the microcontroller.

5. IoT and Cloud based water conservation and monitoring system Avita Katal, Sharad Singhania and Sakshi Jain Published on 26 Aug 2022 (ASIANCON)

There have been many researches whose major focus has been on water conservation but none of them provides with the plan on how to utilize water in an effective manner and minimize water wastage. The proposed system uses ultrasonic and water-level sensors to detect multiple metrics such as the vessel's water level as well as the individual's daily water consumption. These sensors are connected to the Node Microcontroller Unit (NodeMCU), which performs additional computations. The real time data collected is uploaded to the database. A selfdesigned web application is used to show the water usage, alerts in case of water wastage and the recommendations to users in order to help them planning better water utilization.

2.3 Project Statement Definition


- Farmers put fertilizers and pesticides on their crops so that they grow better. But these fertilizers and pesticides can be washed through the soil by rain, to end up in rivers.
- If large amount of fertilizers or farm waste drain into a river the concentration of nitrate and phosphate in the water increases considerably. Algae use these substances to grow and multiply rapidly turning the water green.
- This massive growth of algae, called eutrophication, leads to pollution. When the algae die they are broken down by the action of the bacteria which quickly multiply, using up all the oxygen in the water which leads to the death of many animals.

Problem Statement (PS)	I am (Customer)	I'm trying to	But	Because	Which makes me feel
PS-1	People	To use the water for cooking.	It was dirty.	Medical wastages and fertilizers are mixed with the river water.	Fear to use the River water.
PS-2	People	I want to drink the river water.	It was not clean.	Algae present in the river.	Hard to drink

CHAPTER 3


IDEATION & PROPOSED SOLUTION

3.1 Empathy Map Canvas

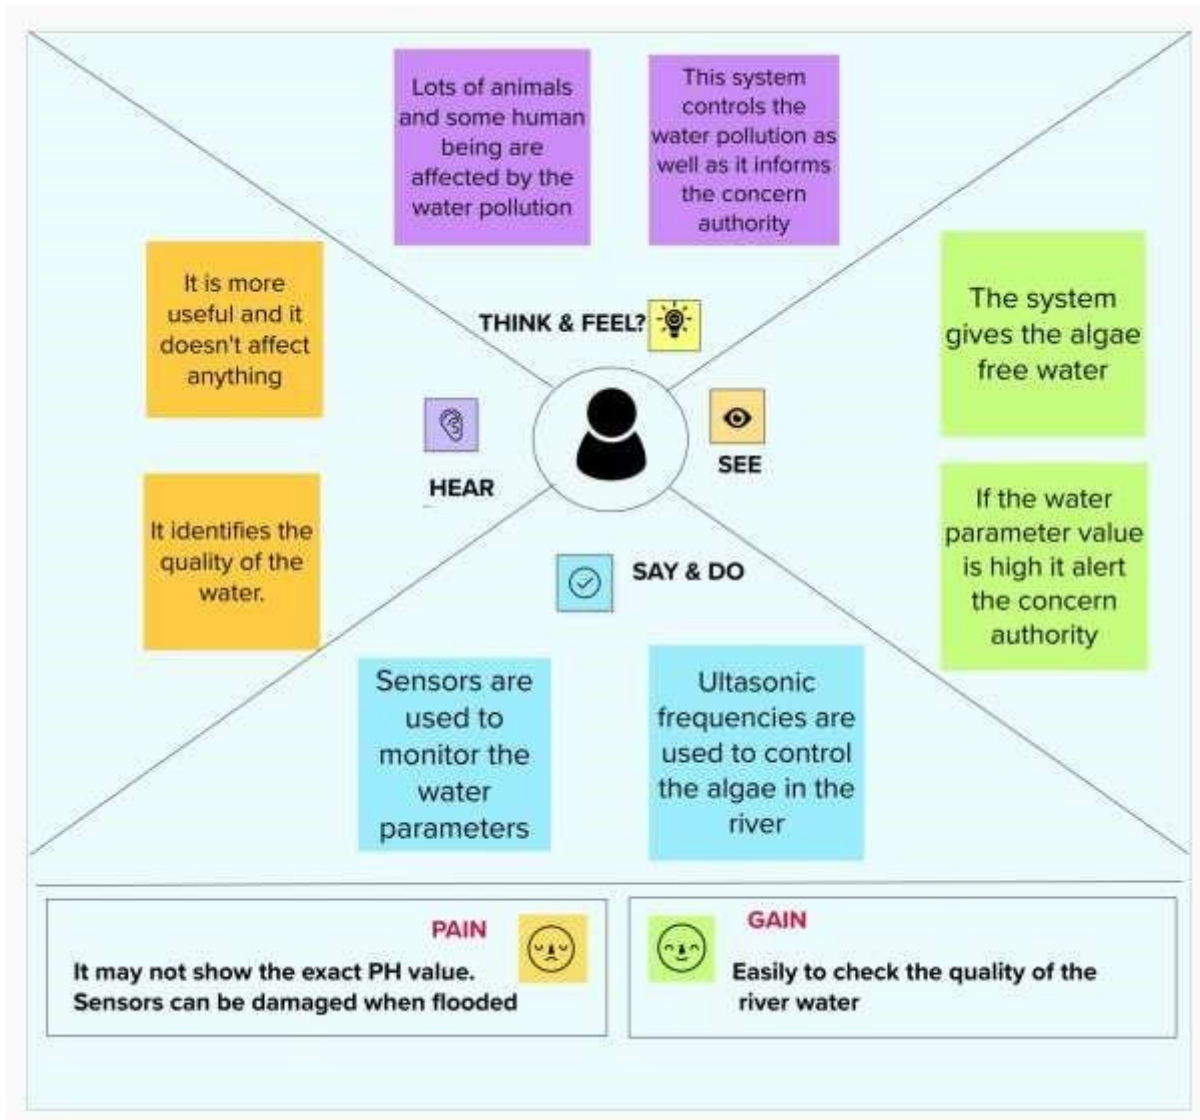

3.2 Ideation & Brainstorming

Step-1: Team Gathering, Collaboration and Select the Problem Statement



Brainstorm & idea prioritization

Use this template in your own brainstorming sessions so your team can unleash their imagination and start shaping concepts even if you're not sitting in the same room.

15 minutes to prepare
1 hour to collaborate
2-8 people recommended

Before you collaborate

A little bit of preparation goes a long way with this session. Here's what you need to do to get going.

10 minutes

1. Team gathering
 Define why you'd participate in the session and send an invite. Share relevant information to pre-work ahead.

2. Set the goal
 Think about the problem you'll be focusing on solving in the brainstorming session.

3. Learn how to use the facilitation tools
 Use the Facilitation Superpowers to run a happy and productive session.

1 hour

1. Define your problem statement

What problem are you trying to solve? Frame your problem as a How Might We statement. This will be the focus of your brainstorm.

10 minutes

Remember, your problem statement is not a goal. It's a problem that you want to solve. It's not a goal. It's a problem that you want to solve.

If your statement is too broad or too narrow, it's not a good statement. It's not a good statement. It's not a good statement.

The problem should be specific and clear. It should be a problem that you want to solve. It's not a goal. It's a problem that you want to solve.

To avoid being too specific, think about the problem in a broader context. It's not a goal. It's a problem that you want to solve.

Step-2: Brainstorm, Idea Listing and Grouping

3. Brainstorm

Write down any ideas that come to mind. Don't worry about whether they are good or bad. Just write them down.

10-15 minutes

CHALLENGE

How can we use the power of the cloud to help us solve the problem of climate change?

IDEAS

Use the power of the cloud to help us solve the problem of climate change. Use the power of the cloud to help us solve the problem of climate change. Use the power of the cloud to help us solve the problem of climate change.

DEVELOPMENT

Use the power of the cloud to help us solve the problem of climate change. Use the power of the cloud to help us solve the problem of climate change. Use the power of the cloud to help us solve the problem of climate change.

4. Group ideas

Take a look at the ideas you've written down. Group them into categories. This will help you see the big picture and identify the most important ideas.

10-15 minutes


Group 1

Use the power of the cloud to help us solve the problem of climate change. Use the power of the cloud to help us solve the problem of climate change. Use the power of the cloud to help us solve the problem of climate change.

Group 2

Use the power of the cloud to help us solve the problem of climate change. Use the power of the cloud to help us solve the problem of climate change. Use the power of the cloud to help us solve the problem of climate change.

Step-3: Idea Prioritization

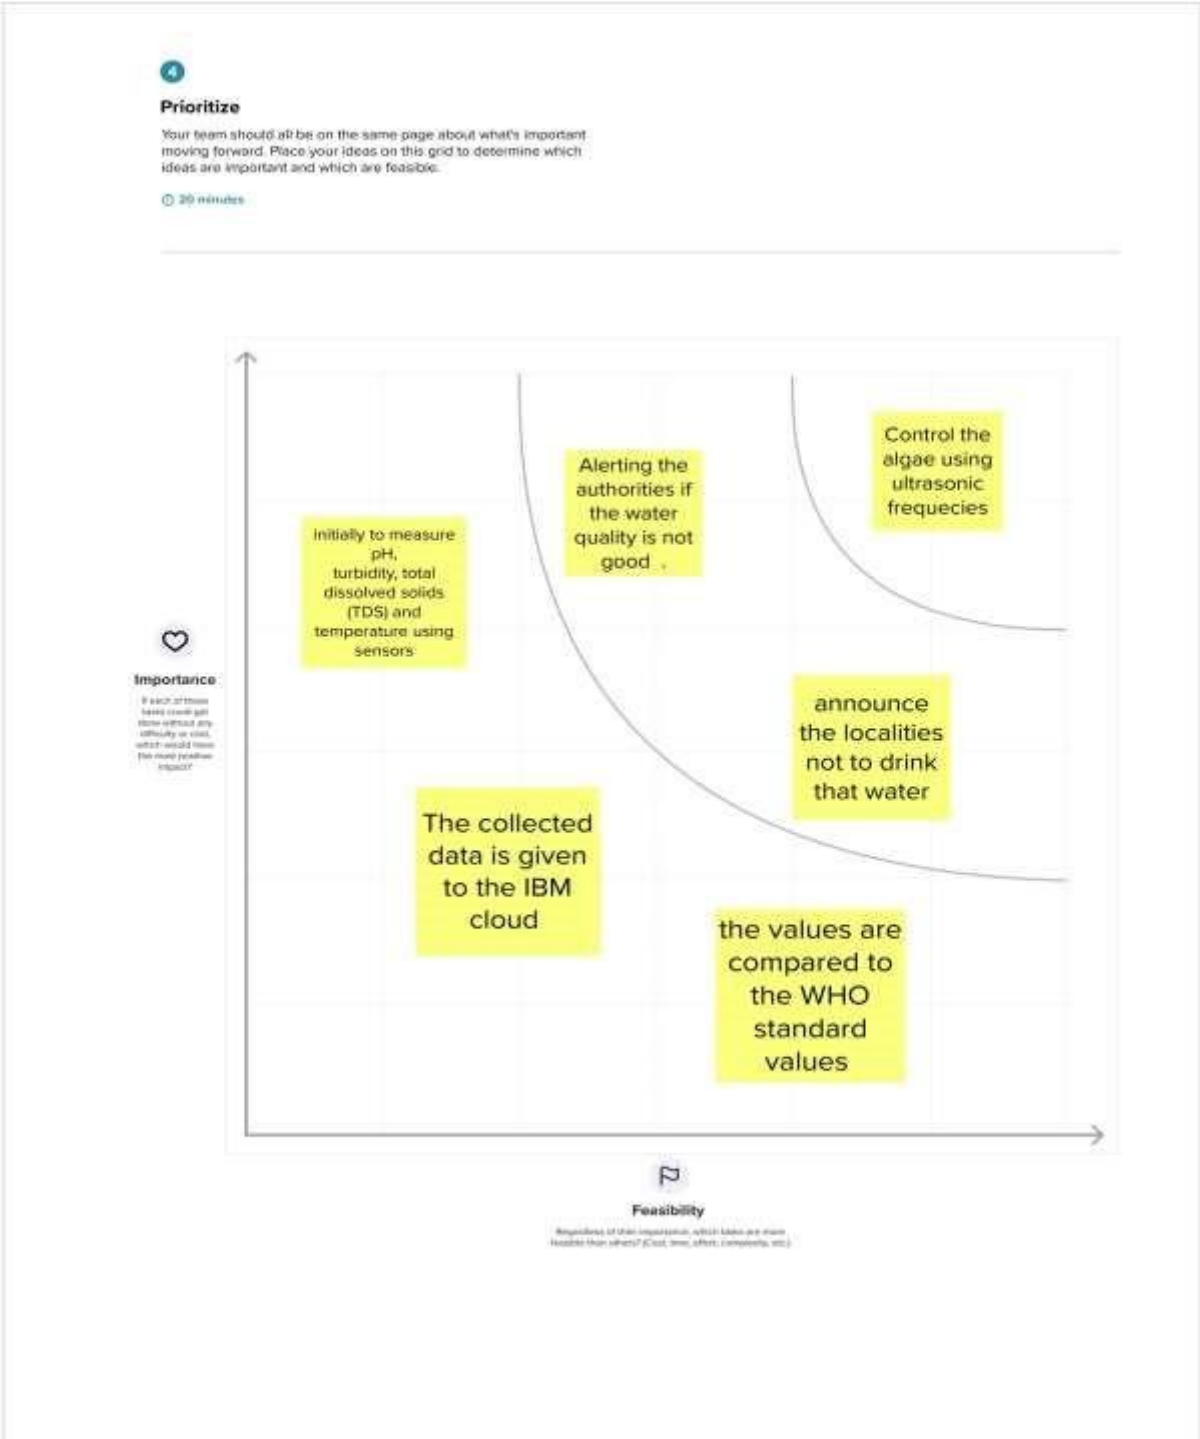

3.3 Proposed Solution

S. No.	Parameter	Description

1.	Problem Statement (Problem to be solved)	To control the algae and monitor the value of PH, Turbidity present in the river water.
2.	Idea / Solution description	The system consists of more number of sensors to monitor the PH, Turbidity and etc., and control the algae by using ultrasonic frequencies .
3.	Novelty / Uniqueness	Controlling the algae by using the ultrasonic technology .
4.	Social Impact / Customer Satisfaction	River pollution can impact all living things. Better controlling and monitoring can impact clean water and healthy.
5.	Business Model (Revenue Model)	River water controlling and monitoring model.
6.	Scalability of the Solution	It is easy to implement.

3.4 Problem Solution fit

<p>1.Customer Segment(CS)</p> <p>Peoples who use the river water</p>	<p>2.Customer Constraints</p> <p>Available of devices.</p>	<p>3. Available Solution</p> <ul style="list-style-type: none"> • IOT based think speak application for monitoring the quality of the water. • IOT based smart water quality monitoring system. <p>□ IOT cloud based water conservation and monitoring system.</p>
<p>4.Jobs-to-be-Done</p> <p>The sensor in the system measures the PH and temperature of the river water. Then the values are compared to the standard values. If it is greater than standard values it alerts the consent authorities.</p>	<p>5. Problem Root Cause</p> <p>The problem arises naturally.</p>	<p>6.Behaviour</p> <p>After the alert, the people can use water from other till the issue solved by the corporation.</p>
<p>7.Triggers</p> <p>If the sensors are damaged, the user will not know how to rectify.</p>	<p>9. Your Solution</p> <p>To control the algae and to monitor the water parameters like PH and temperature in the river water and then alert the consent authorities and the local authorities.</p>	<p>10.Channels of Behaviour</p> <p>In online service, customer may need to install the mobile application for that.</p> <p>In offline service, customer has need to travel and report the issue.</p>
<p>8.Emotions</p> <p>Before, People using the water with a fear and now they are only using the clean water</p>		

CHAPTER 4

REQUIREMENT ANALYSIS

4.1 Functional requirement

FR No.	Functional Requirement (Epic)	Sub Requirement (Story / Sub-Task)
FR-1	User Registration	Registration through Form Registration through Gmail
FR-2	User Confirmation	Confirmation via Email Confirmation via OTP
FR-3	PH sensor	PH sensor are used to detect the PH value of the water
FR-4	Turbidity sensor	Turbidity sensors are used to detect the turbidity value of the water.
FR-5	Thermistors or Thermocouples	Thermistors or Thermocouples are used to detect the temperature of the water.
FR-6	Ultrasonic signal generator	Ultrasonic signal generator generates ultrasonic signal to destroy the algae present in the water.
FR-7	Mobile Application	To give the alerts to the corporation and the local authorities.

4.2 Non-Functional requirements


NFR No.	Non-Functional Requirement	Description
NFR-1	Usability	It is good and efficient to use.
NFR-2	Security	It has high security.
NFR-3	Reliability	Quality assurance, quality control and quality assessment procedures have been implemented.

NFR-4	Performance	The performance of the system good and efficient.
NFR-5	Scalability	The ability of the system is highly scalable.

CHAPTER 5

PROJECT DESIGN


5.1 Data Flow Diagrams

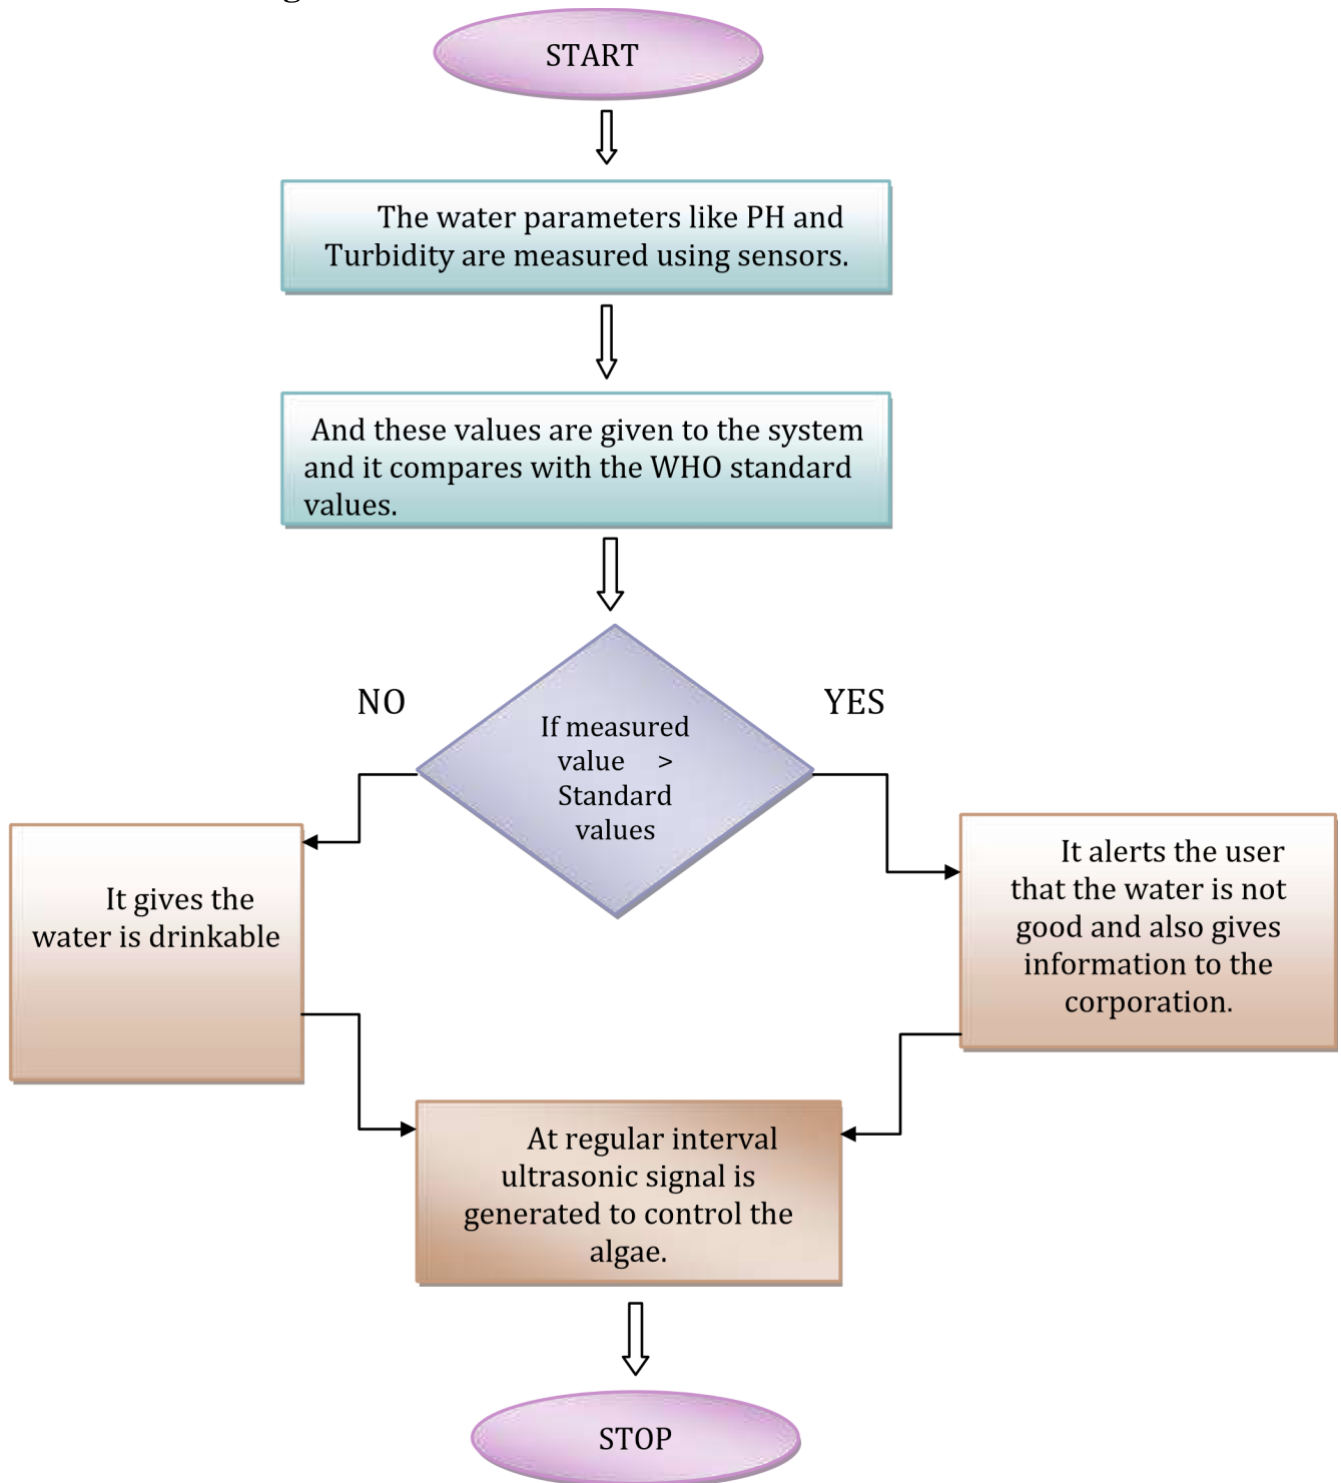


5.2 Solution & Technical Architecture

Solution architecture is a complex process – with many sub-processes – that bridges the gap between business problems and technology solutions. Its goals are to:

- Find the best tech solution to solve existing business problems.
- Describe the structure, characteristics, behavior, and other aspects of the software to project stakeholders.
- Define features, development phases, and solution requirements.
- Provide specifications according to which the solution is defined, managed, and delivered.

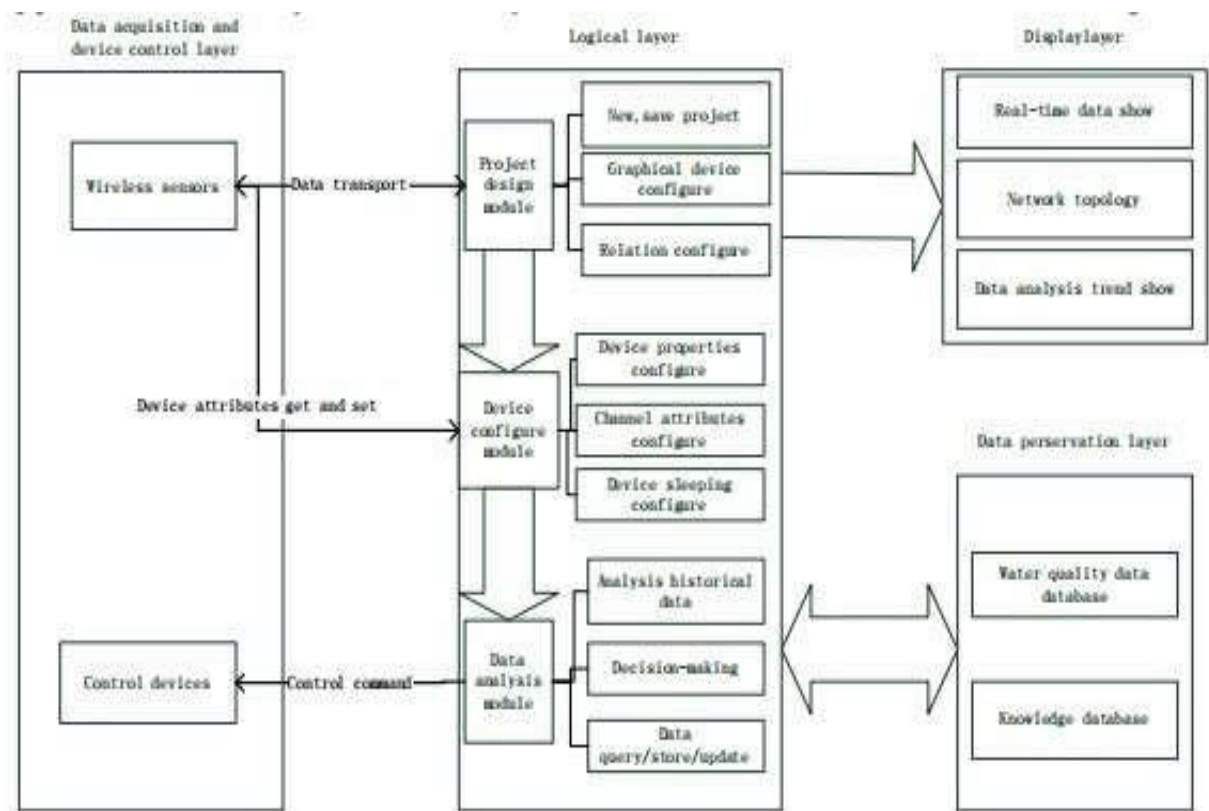

Solution Architecture Diagram

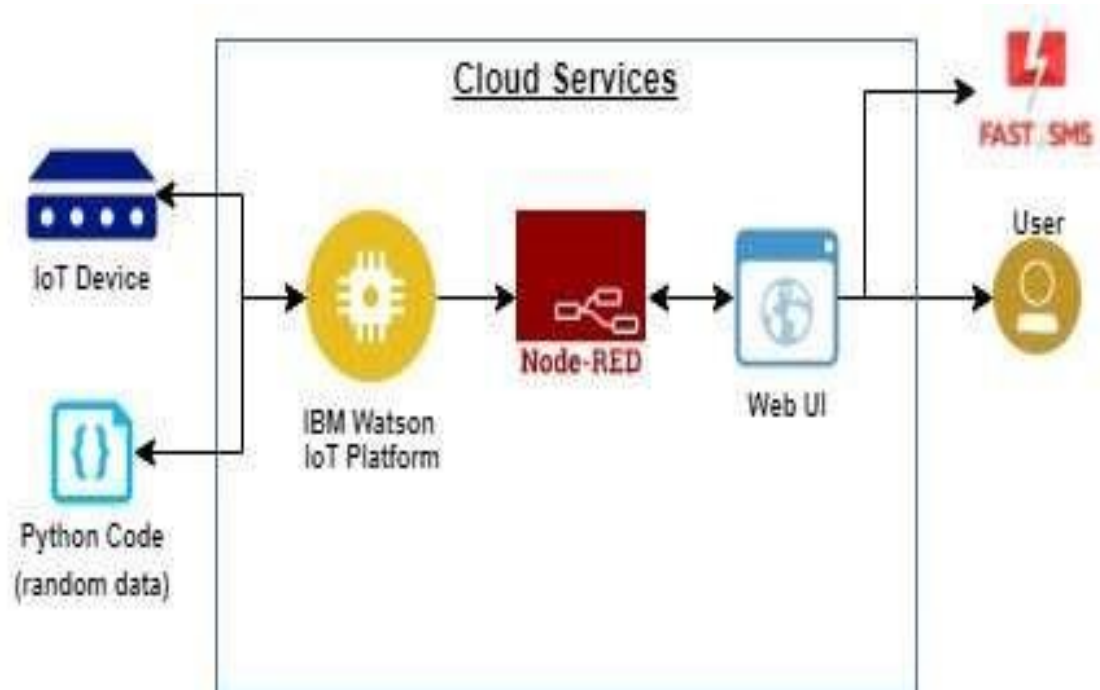

Technical Architecture

Components and Technology Table:

S. No	Component	Description	Technology
1.	Mobile Application	To give the alerts to the corporation and the local authorities.	SMS service
2.	Web Application	access the data from the cloud	Web UI (using node red service)
3.	PH sensor	detect the PH value of the river water	PH level monitoring
4.	Turbidity sensor	Detect the turbidity level of the water	Turbidity level monitoring
5.	ESP32	To process the sensed data from the sensors	IBM Watson

5.3 User Stories

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release
Customer (Mobile user)	Registration	USN-1	As a user, I can register for the application by entering my email, password, and confirming my password.	I can access my account / dashboard	High	Sprint-1
		USN-2	As a user, I will receive confirmation email once I have registered for the application	I can receive confirmation email & click confirm	High	Sprint-1
		USN-3	As a user, I can register for the application through Facebook	I can register & access the dashboard with Facebook Login	Low	Sprint-2
		USN-4	As a user, I can register for the application through Gmail	I can register through the mail	Medium	Sprint-1
	Login	USN-5	As a user, I can log into the application by entering email & password	I can get login credential	High	Sprint-1

Customer (Web user)	Dashboard	WUSN-1	As a user, I can login to the web application by using user name and password	I can access my account	High	Sprint-1
User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release
Customer Care Executive	View manner	CCE-1	As a user, I can see the data in visual view. (graphical representation)	I can easily understand	High	Sprint-1
	Quality	CCE-2	As a user, I can easily predict the quality of the water	I can easily identify the quality of the water	High	Sprint-1
Administrator	person	Adm-1	As a admin, I can take all the responsibility about the system	I can monitor the entire system properly	High	Sprint-2

CHAPTER 6

PROJECT PLANNING & SCHEDULING

6.1 Sprint Planning & Estimation

Sprint	Functional Requirement (Epic)	User Story Number	User Story / Task	Story Points	Priority	Team Members
Sprint-1	Registration	USN-1	As a user, I can register for the application by entering my email, password, and confirming my password.	3	High	Abi, Gobika
Sprint-1	Confirmation	USN-2	As a user, I will receive confirmation email once I have registered for the application.	2	Medium	Abi, Gobika
Sprint-1	Registration using Gmail	USN-4	As a user, I can register for the application through Gmail.	2	Medium	Abi, Gobika
Sprint-1	Login	USN-5	As a user, I can log into the application by entering email & password.	3	High	Abi, Gobika
Sprint-2	IBM cloud	USN-6	As a user, I can get access to IBM cloud service.	2	Medium	Kanishka Ishwarya
Sprint-2	IBM Watson and device setting	USN-7	Creating IBM Watson and device setting for integrate the microcontroller to get the sensed data.	3	High	Kanishka Ishwarya
Sprint-2	Node red	USN-8	To create the Node red service.	3	High	Kanishka Ishwarya
Sprint-3	Create Web UI	USN-9	To create Web UI to access the data from the cloud.	3	High	Kanishka, Ishwarya
Sprint-3	Create web application	USN-10	To create the web application.	2	Medium	Srikanth, Surya

Sprint-3	Source code creation	USN-11	To create the source code for the project.	3	High	Srikanth, Surya
Sprint-4	Publish data	USN-12	Publish the sensed data to the cloud.	3	High	Dinesh, Surya
Sprint	Functional Requirement (Epic)	User Story Number	User Story / Task	Story Points	Priority	Team Members
Sprint-4	SMS	USN-13	If the sensed values are higher than the standard values it sends the message to the authorities.	3	High	Abi, Ishwarya
Sprint-4	Testing	USN-14	Testing the developed project.	3	High	Gobika, Kanishka


6.3 Report from JIRA

Imagine we have a 10-day sprint duration, and the velocity of the team is 20 (points per sprint). Let's calculate the team's average velocity (AV) per iteration unit (story points per day)

$$AV = \frac{\text{sprint duration}}{\text{velocity}} = \frac{20}{10} = 2$$

CHAPTER 7 CODING AND SOLUTION

7.1 Feature 1

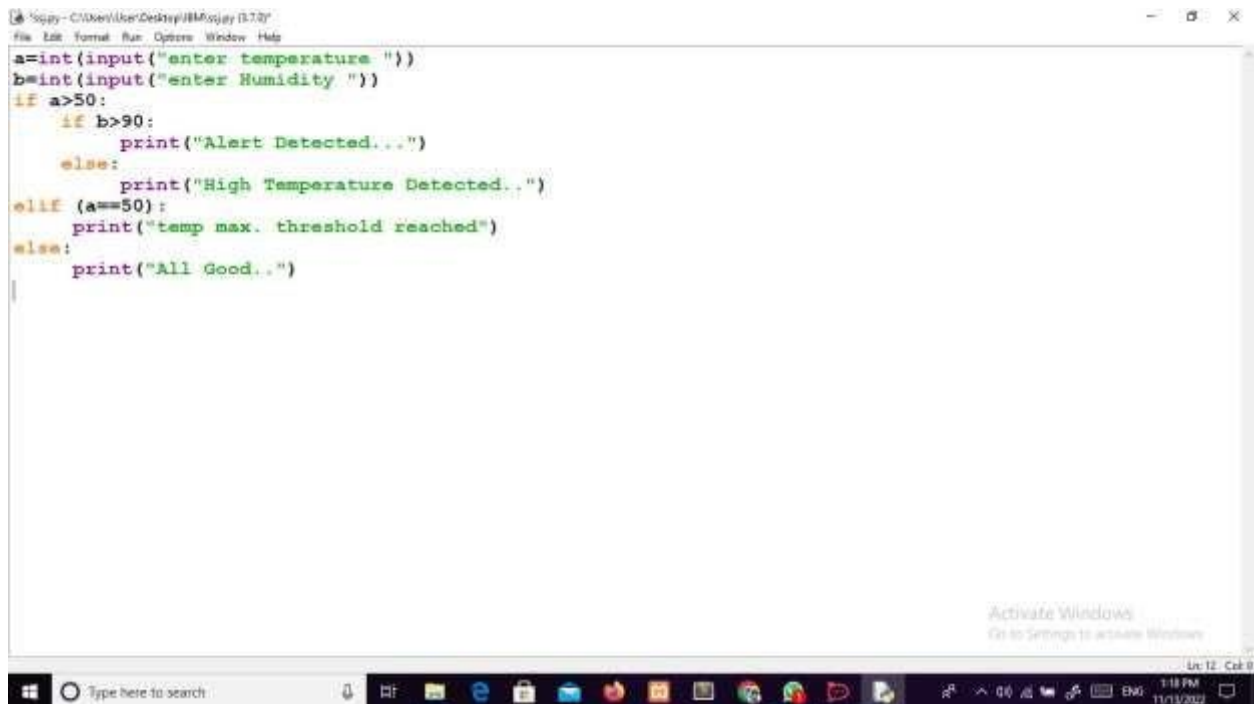

```
File Edit Format Run Options Window Help
a=int(input("enter temperature "))
b=int(input("enter Humidity "))
if a>50:
    if b>90:
        print("Alert Detected...")
    else:
        print("High Temperature Detected..")
elif (a==50):
    print("temp max. threshold reached")
else:
    print("All Good..")
```

Activate Windows
Go to Settings to activate Windows.

Ln 12 Col 8



```
Python 3.7.0 Shell
File Edit Shell Debug Options Window Help
Python 3.7.0 (v3.7.0:1bf9cc5093, Jun 27 2018, 04:59:51) [MSC v.1914 64 bit (AMD64)] on win32
Type "copyright", "credits" or "license()" for more information.
>>>
===== RESTART: C:\Users\User\Desktop\IBM\ssj.py =====
enter temperature 70
enter Humidity 50
High Temperature Detected..
>>>
===== RESTART: C:\Users\User\Desktop\IBM\ssj.py =====
enter temperature 80
enter Humidity 100
Alert Detected...
>>>
===== RESTART: C:\Users\User\Desktop\IBM\ssj.py =====
enter temperature 50
enter Humidity 80
temp max. threshold reached
>>>
===== RESTART: C:\Users\User\Desktop\IBM\ssj.py =====
enter temperature 40
enter Humidity 80
All Good..
>>> |
```

Activate Windows
Go to Settings to activate Windows.

Ln 23 Col 4

7.2 Feature 2

```
import time
import sys
import ibmiotf.application
import ibmiotf.device
import random
```



```

#Provide your IBM Watson Device Credentials
organization = "s2qhvm" deviceType = "Laptop"
deviceId = "0410" authMethod =
"token" authToken =
"20011004"

# Initialize GPIO

def myCommandCallback(cmd):    print("Command
received: %s" % cmd.data['command'])
status=cmd.data['command']    if status=="lighton":
print ("led is on")    elif status=="lightoff":    print ("led is
off")    else:
    print("please send the proper command")

    #print(cmd)

try:
deviceOptions = {"org": organization, "type": deviceType, "id": deviceId,
"auth-method": authMethod, "auth-token": authToken}
deviceCli = ibmiotf.device.Client(deviceOptions)
    #.....

except Exception as e:    print("Caught exception
connecting device: %s" % str(e))
sys.exit()

# Connect and send a datapoint "hello" with value "world" into the cloud as an event
of type "greeting" 10 times deviceCli.connect()

while True:
    #Get Sensor Data from DHT11

    PH=random.randint(90,110)
    Turbidity=random.randint(60,100)

    data = { 'PH' : PH, 'Turbidity': Turbidity }
    #print data    def myOnPublishCallback():    print ("Published PH
value = %s C" % PH, "Turbidity= %s %" % Turbidity, "to IBM Watson")

    success = deviceCli.publishEvent("IoTSensor", "json", data, qos=0,

```

```
on_publish=myOnPublishCallback)    if not success:    print("Not
connected to IoT")
    time.sleep(1)

    deviceCli.commandCallback = myCommandCallback

# Disconnect the device and application from the cloud deviceCli.disconnect()
```

Python 3.7.0 Shell

File Edit Shell Debug Options Window Help

Python 3.7.0 (v3.7.0:1bf9cc5093, Jun 27 2018, 04:59:51) [MSC v.1914 64 bit (AMD64)] on win32
Type "copyright", "credits" or "license()" for more information.

>>>

===== RESTART: C:\Users\User\Downloads\ibmiotpublishsubscribe.py =====

2022-11-14 18:38:30,936 ibmiotf.device.Client INFO Connected successfully: d:s2qhvmlaptop:0410

Published Temperature = 101 C Humidity = 84 % to IBM Watson
Published Temperature = 108 C Humidity = 86 % to IBM Watson
Published Temperature = 105 C Humidity = 73 % to IBM Watson
Published Temperature = 110 C Humidity = 69 % to IBM Watson
Published Temperature = 102 C Humidity = 88 % to IBM Watson
Published Temperature = 100 C Humidity = 91 % to IBM Watson
Published Temperature = 105 C Humidity = 89 % to IBM Watson
Published Temperature = 106 C Humidity = 95 % to IBM Watson
Published Temperature = 100 C Humidity = 79 % to IBM Watson
Published Temperature = 92 C Humidity = 62 % to IBM Watson
Published Temperature = 101 C Humidity = 90 % to IBM Watson
Published Temperature = 91 C Humidity = 77 % to IBM Watson

IBM Watson IoT Platform


Browse Action Device Types Interfaces

0410 Disconnected Laptop Device Nov 1, 2022 10:53 PM

Identity Device Information Recent Events State Logs

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
IoT Sensor	{"temp":100,"humid":80}	json	a few seconds ago
IoT Sensor	{"temp":103,"humid":95}	json	a few seconds ago
IoT Sensor	{"temp":95,"humid":77}	json	a few seconds ago
IoT Sensor	{"temp":91,"humid":77}	json	a few seconds ago
IoT Sensor	{"temp":101,"humid":90}	json	a few seconds ago

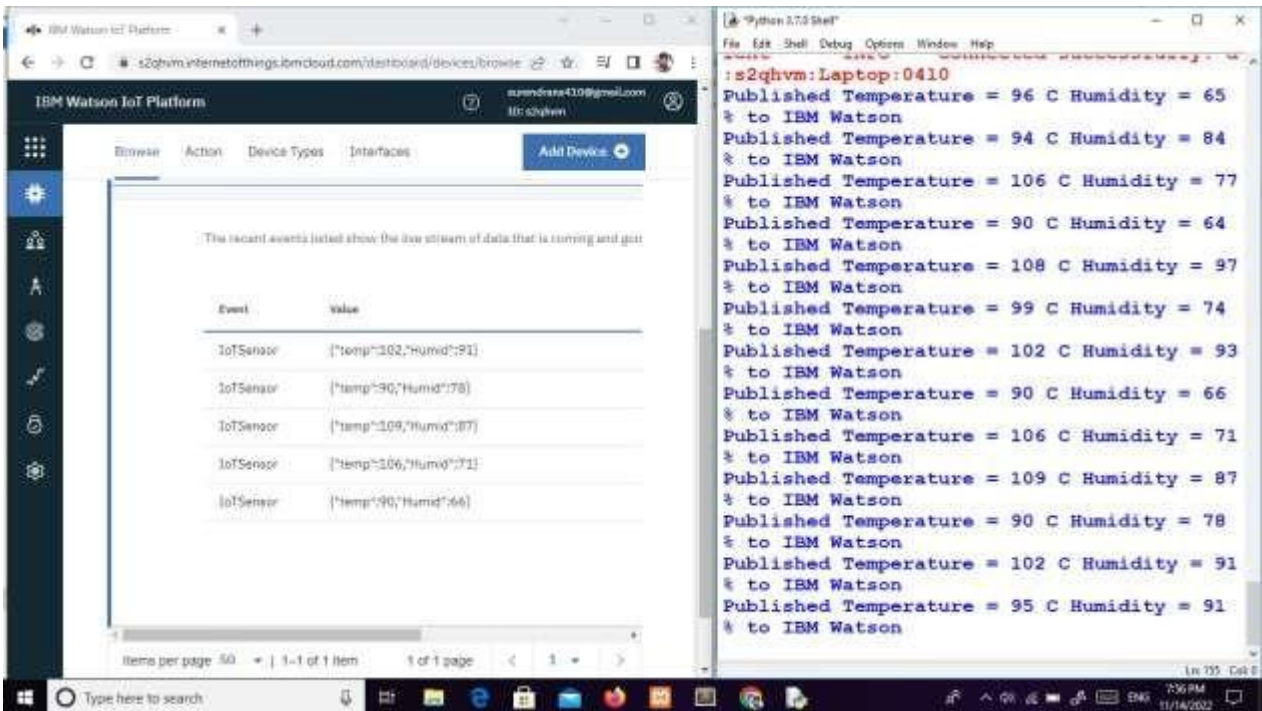



CHAPTER 8 TESTING

8.1 Test Cases

The main benefit of testing is the **identification and subsequent removal of the errors**. However, testing also helps developers and testers to compare actual and expected results in order to improve quality. If the software production happens without testing it, it could be useless or sometimes dangerous for customers.

- (i) Performance of the App.
- (ii) Analyzing the data from the system.
- (iii) Analyze the system performance with the expected performance.

8.2 User Acceptance Testing

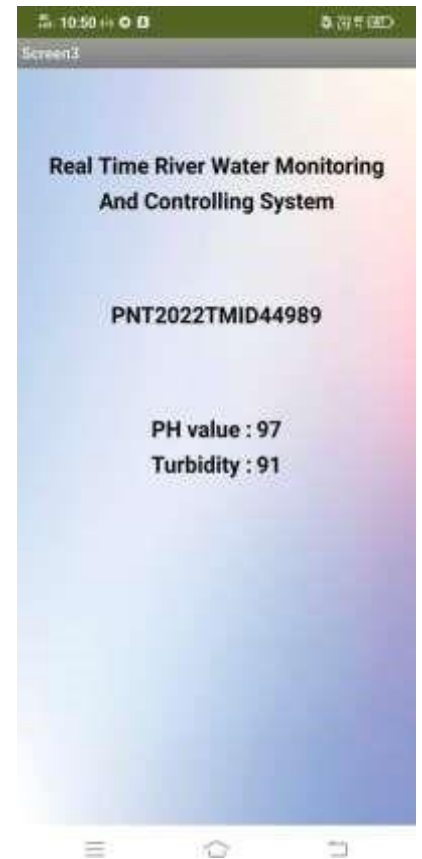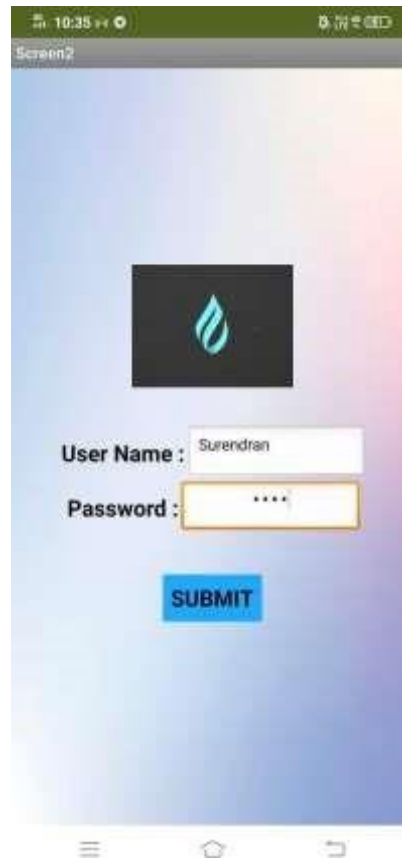

CHAPTER 9 RESULTS

9.1 Performance Metrics

- The performance of the system is good and it is easy to find the quality of the water. The performance of the system is achieved by nearly 80% of the expected output of the system.

CHAPTER 10 ADVANTAGES AND DISADVANTAGE

Advantages:

- Easy detect the quality of the river water. Power consumption of the system is low.

- We can give the clean water.
- Easy to access the application.
- People are uses the river water without fear.
- Water pollution can be controlled.

Disadvantages:

- Cost of the sensor is high.
- If the problem arises in the system, it cannot be solved by the user.
- Sometimes, sensors give the wrong PH value.
- If the river gets flooded, then the sensors are damaged.
- Need to maintain the system always.

CHAPTER 11 CONCLUTION

Water turbidity, PH, and temperature are monitored using a water detection sensor that has a unique advantage. The technology can automatically monitor water quality, is low-cost, and does not require personnel to be on duty. As a result, water quality testing will most likely be more cost-effective, convenient, and quick. The method is very adaptable.

This system may be used to monitor different water quality metrics by simply replacing the matching sensors and modifying the required software packages. The procedure is straightforward. The system can be expanded to track hydrologic, air pollution, industrial, and agricultural output, among other things. It is widely used and has a large number of applications. Keeping embedded devices in the environment for monitoring allows the environment to protect itself.

By this Real time river water monitoring and control system, we can easily identity the quality of the river water. Also the people have to use the river water without any Fears.

CHAPTER 12 FUTURE SCOPE

The future scope of this project is monitoring environmental conditions, drinking water quality, treatment and disinfection of waste water etc. This system could also be implemented in various industrial processes. The system can be modified according to the needs of the user and can be implemented along with lab view to monitor data on computers.

CHAPTER 13

APPENDIX

13.1 Source Code

a. HTML code for registration (UI)

```
<html>
  <head>
    <h1 style="background_color:darkblue;">IOT</h1>
  </head>
  <body>
    <p style="background_color:Green;">
      <OL>
        <LI>Enter your name</LI>
        <LI>Mail ID</LI>
        <LI>mobile number</LI>
      </OL>

      <h4><a href="https://project mark.com/">project mark</a></h4>
      <form method="post" action="/{ {url} }">
        <label for="name">First name:</label><br>
        <input type="text" id="fname" name="fname"><br>
        <label for="mail id">Mail ID:</label><br>
        <input type="text" id="MID" name="MID"><br>
        <label for="mobile number">mobile number:</label><br>
        <input type="text" id="num" name="num"><br>
        <input type="submit" value="submit">
```

```

    <input type="reset" value="reset">
</form>
</body>
</html>

```

b. Arduino code

```

#include <OneWire.h>
#include <DallasTemperature.h>
#define ONE_WIRE_BUS 5
OneWire oneWire(ONE_WIRE_BUS);
DallasTemperature sensors(&oneWire);
float Celcius=0; float Fahrenheit=0;
float voltage=0; const int analogInPin
= A0; int sensorValue = 0;
unsigned long int avgValue;
float b; int buf[10],temp;
void setup(void)
{
    Serial.begin(9600);
    sensors.begin();
    int sensorValue = analogRead(A1);
    voltage = sensorValue * (5.0 / 1024.0);
}
void loop(void)
{
    sensors.requestTemperatures();
    Celcius=sensors.getTempCByIndex(0);
    Fahrenheit=sensors.toFahrenheit(Celcius); for(int
    i=0;i<10;i++)
    {
        buf[i]=analogRead(analogInPin);
        delay(10);
    }
    for(int i=0;i<9;i++)
    {
        for(int j=i+1;j<10;j++)
        {
            if(buf[i]>buf[j])

```



```

        {
temp=buf[i];
buf[i]=buf[j];
        buf[j]=temp;
        }
    }    for(int i=2;i<8;i++)
avgValue+=buf[i];    float
pHVol=(float)avgValue*5.0/1024/6;
float pHValue = -5.70 * pHVol + 21.34;
Serial.println(pHValue);
Serial.print("pH");
Serial.print(" C ");
Serial.print(Celcius);
Serial.print(voltage);
Serial.print("V");    delay(10000);
}

```

c. Python code

```

import time import sys
import ibmiotf.application
import ibmiotf.device import
random
#Provide your IBM Watson Device Credentials
organization = "s2qhvm" deviceType = "Laptop"
deviceId = "0410" authMethod =
"token" authToken =
"20011004" # Initialize
GPIO

def myCommandCallback(cmd):
    print("Command received: %s" % cmd.data['command'])
    status=cmd.data['command']    if status=="lighton":
    print ("led is on")    elif status=="lightoff":    print ("led is
off")    else:
        print("please send the proper command")

    #print(cmd)

```

```

try:
    deviceOptions = {"org": organization, "type": deviceType, "id": deviceId,
"auth-method": authMethod, "auth-token": authToken}
    deviceCli = ibmiotf.device.Client(deviceOptions)
        #.....

except Exception as e:  print("Caught exception
connecting device: %s" % str(e))
    sys.exit()

# Connect and send a datapoint "hello" with value "world" into the cloud as an event
of type "greeting" 10 times deviceCli.connect()

while True:
    #Get Sensor Data from DHT11

    PH=random.randint(90,110)
    Turbidity=random.randint(60,100)

    data = { 'PH' : PH, 'Turbidity': Turbidity }
    #print data      def
myOnPublishCallback():
    print ("Published PH value = %s C" % PH, "Turbidity= %s %" %
Turbidity, "to IBM Watson")

    success = deviceCli.publishEvent("IoTSensor", "json", data, qos=0,
on_publish=myOnPublishCallback)    if not success:
print("Not connected to IoTF")    time.sleep(1)

    deviceCli.commandCallback = myCommandCallback

# Disconnect the device and application from the cloud deviceCli.disconnect()

```