## **ASSIGNMENT 4**

## **Problem Statement:**

Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events

#### CODE:


```
esp32-blink.ino ● diagram.json ● libraries.txt ● Library Manager
       pinMode(trig,OUTPUT);
pinMode(echo,INPUT);
       pinMode(LED, OUTPUT);
       delay(10);
       wificonnect();
       mqttconnect();
       void loop()// Recursive Function
        digitalWrite(trig,LOW);
         digitalWrite(trig,HIGH);
         delayMicroseconds(10);
         digitalWrite(trig,LOW);
         float dur = pulseIn(echo,HIGH);
         float dist = (dur * 0.0343)/2;
Serial.print ("Distancein cm");
         Serial.println(dist);
         PublishData(dist);
         delay(1000);
         if (!client.loop()) {
           mqttconnect();
       void PublishData(float dist) {
         mqttconnect();//function call for connecting to ibm
         String object;
         if (dist <100)
           digitalWrite(LED, HIGH);
           Serial.println("object is near");
           object = "Near";
           digitalWrite(LED,LOW);
           Serial.println("no object found");
           object = "No";
         String payload = "{\"distance\":";
         payload += dist;
         payload += "," "\"object\":\"";
         payload += object;
         payload += "\"}";
         Serial.print("Sending payload: ");
         Serial.println(payload);
```

```
if (client.publish(publishTopic, (char*) payload.c_str())) [
   Serial.println("Publish ok");// if it successfully upload data on the cloud then it will print publish ok
  } else {
   Serial.println("Publish failed");
void mqttconnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting client to ");
     Serial.println(server);
     while (!!!client.connect(clientId, authMethod, token)) {
        Serial.print(".");
delay(500);
      initManagedDevice();
      Serial.println();
void wificonnect() //function defination for wificonnect
  Serial.println();
  Serial.print("Connecting to ");
  WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
  while (WiFi.status() != WL_CONNECTED) {
  delay(500);
  Serial.print(".");
  Serial.println("");
  Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
```


```
esp32-blink.ino •
                   diagram.json •
                                   libraries.txt •
                                                  Library Manager
         WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connect
         while (WiFi.status() != WL_CONNECTED) {
           delay(500);
           Serial.print(".");
         Serial.println("");
         Serial.println("WiFi connected");
         Serial.println("IP address: ");
         Serial.println(WiFi.localIP());
       void initManagedDevice() {
        if (client.subscribe(subscribetopic)) {
           Serial.println((subscribetopic));
           Serial.println("subscribe to cmd OK");
           Serial.println("subscribe to cmd FAILED");
       void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
         Serial.print("callback invoked for topic: ");
 148
         Serial.println(subscribetopic);
         for (int i = 0; i < payloadLength; i++) {
           data3 += (char)payload[i];
```

```
diagram.json • libraries.bxt • Library Manager • libraries.bxt • library Manager • libraries.bxt • libraries
```


### **OUTPUT:**

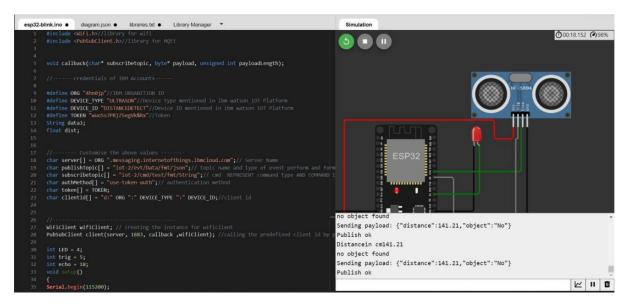

Data send to the IBM cloud device when the object is far

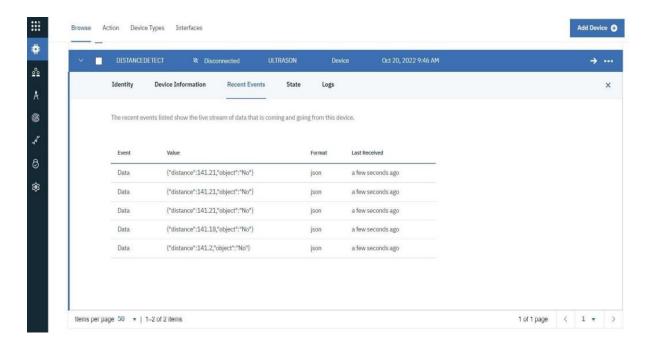

# When the object is near to the ultrasonic sensor

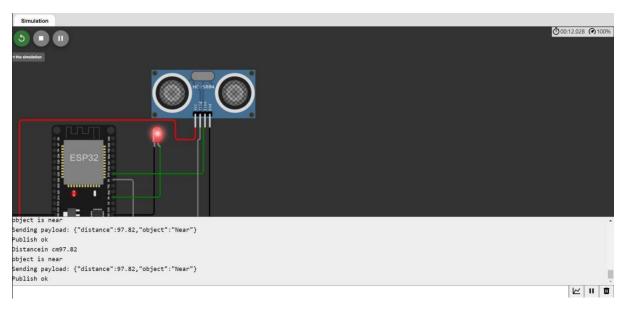

Data sent to the IBM Cloud Device when the object is near

