

#### Assignment-4

##### Distance Detection Using Ultrasonic Sensor

Assignment Date	19 October2022
Student Name	Mr.R.Prem Kumar
Student Roll Number	621319106070
Maximum Marks	2 Marks

#### Question-1:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100cms send "alert" to ibm cloud and display in device recent events.

WOKWI LINK : <https://wokwi.com/projects/346583291029094994>

#### CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);

#define ORG "f59trs"
#define DEVICE_TYPE "ultrasonicsensor"
#define DEVICE_ID "distancedetection"
#define TOKEN "AlGMGaaF01nawa1QA3"
String data3;
float dist;

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;

WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);

int LED = 4;
int trig = 5;
int echo = 18;
void setup()
{
  Serial.begin(115200);
  pinMode(trig,OUTPUT);
```

```

pinMode(echo, INPUT);
pinMode(LED, OUTPUT);
delay(10);
wificonnect();
mqttconnect();
}
void loop()
{
    digitalWrite(trig, LOW);
    digitalWrite(trig, HIGH);
    delayMicroseconds(10);
    digitalWrite(trig, LOW);
    float dur = pulseIn(echo, HIGH);
    float dist = (dur * 0.0343)/2;
    Serial.print("Distance in cm :");
    Serial.println(dist);

    PublishData(dist);
    delay(1000);
    if (!client.loop()) {
        mqttconnect();
    }
}

void PublishData(float dist) {
    mqttconnect();
    String object;
    if (dist < 100)

```

```

    if (dist < 100)
    {
        digitalWrite(LED, HIGH);
        Serial.println("object is near");
        object = "Near";
    }
    else
    {
        digitalWrite(LED, LOW);
        Serial.println("no object found");
        object = "No";
    }

    String payload = "{\"distance\": ";
    payload += dist;
    payload += ", \"object\": \"";
    payload += object;
    payload += "\"}";

    Serial.print("Sending payload: ");
    Serial.println(payload);

    if (client.publish(publishTopic, (char*) payload.c_str())) {
        Serial.println("Publish ok");
    } else {
        Serial.println("Publish failed");
    }
}

void mqttconnect() {
    if (!client.connected()) {

```

```

        Serial.print("Reconnecting client to ");
        Serial.println(server);
        while (!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(500);
        }
        initManagedDevice();
        Serial.println();
    }
}

void wificonnect()
{
    Serial.println();
    Serial.print("Connecting to ");
    WiFi.begin("Wokwi-GUEST", "", 6);
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.println("");
    Serial.println("WiFi connected");
    Serial.println("IP address: ");
    Serial.println(WiFi.localIP());
}

void initManagedDevice() {
    if (client.subscribe(subscribetopic)) {
        Serial.println((subscribetopic));
        Serial.println("subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}

```

```


        Serial.println("subscribe to cmd FAILED");
    }
}

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
    Serial.print("callback invoked for topic: ");
    Serial.println(subscribetopic);
    for (int i = 0; i < payloadLength; i++) {
        data3 += (char)payload[i];
    }
    data3="";
}

```

## OUTPUT:

### When object is not near to the ultrasonic sensor

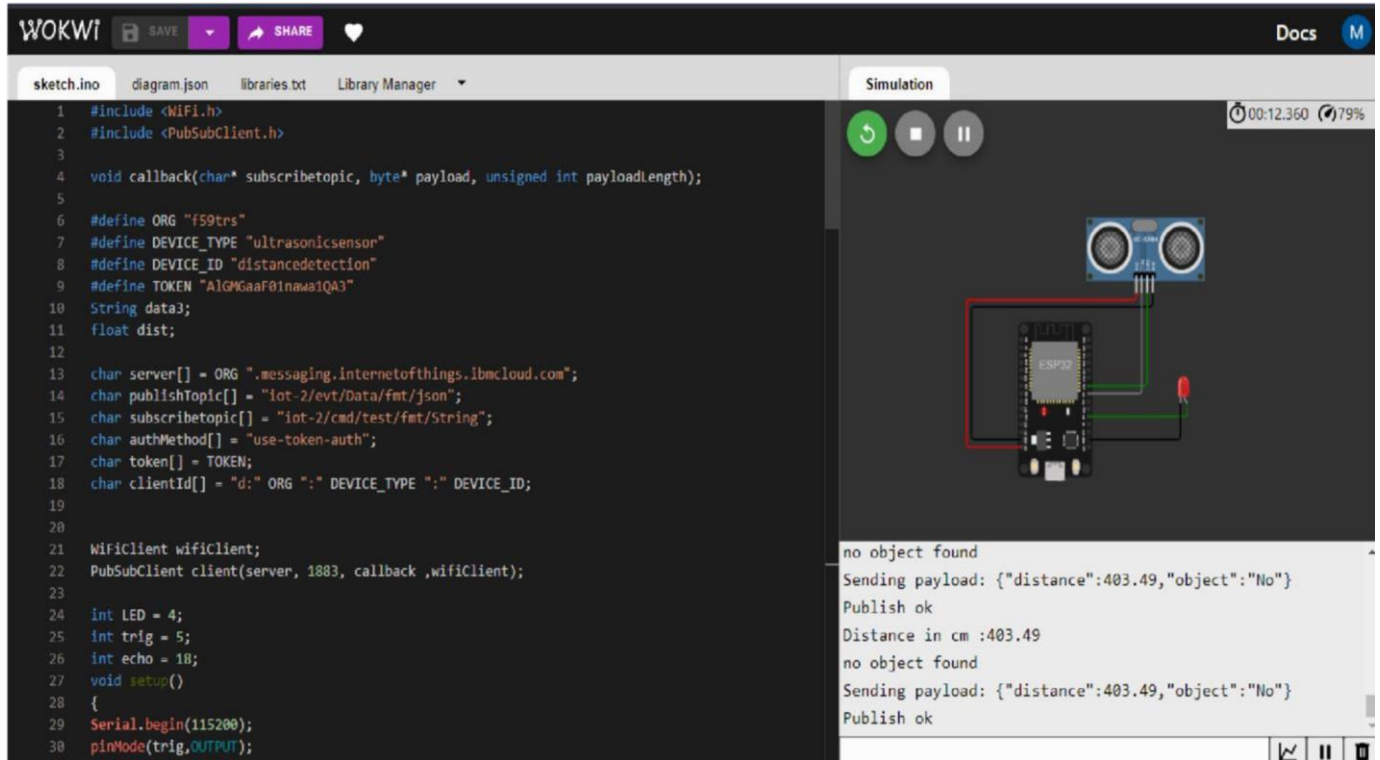


```
1 #include <WiFi.h>
2 #include <PubSubClient.h>
3
4 void callback(char* topic, byte* payload, unsigned int payloadLength);
5
6 #define ORG "f59trs"
7 #define DEVICE_TYPE "ultrasonicsensor"
8 #define DEVICE_ID "distancedetection"
9 #define TOKEN "AlGMGaaF0inawa1QA3"
10 String data3;
11 float dist;
12
13 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
14 char publishTopic[] = "iot-2/evt/Data/fmt/json";
15 char subscribtopic[] = "iot-2/cmd/test/fmt/String";
16 char authMethod[] = "use-token-auth";
17 char token[] = TOKEN;
18 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
19
20
21 WiFiClient wifiClient;
22 PubSubClient client(server, 1883, callback, wifiClient);
23
24 int LED = 4;
25 int trig = 5;
26 int echo = 18;
27
28 void setup()
29 {
30   Serial.begin(115200);
31   pinMode(trig, OUTPUT);
```

Simulation

no object found  
Sending payload: {"distance":403.49,"object":"No"}  
Publish ok  
Distance in cm :403.49  
no object found  
Sending payload: {"distance":403.49,"object":"No"}  
Publish ok

### Data sent to the IBM cloud device when the object is far

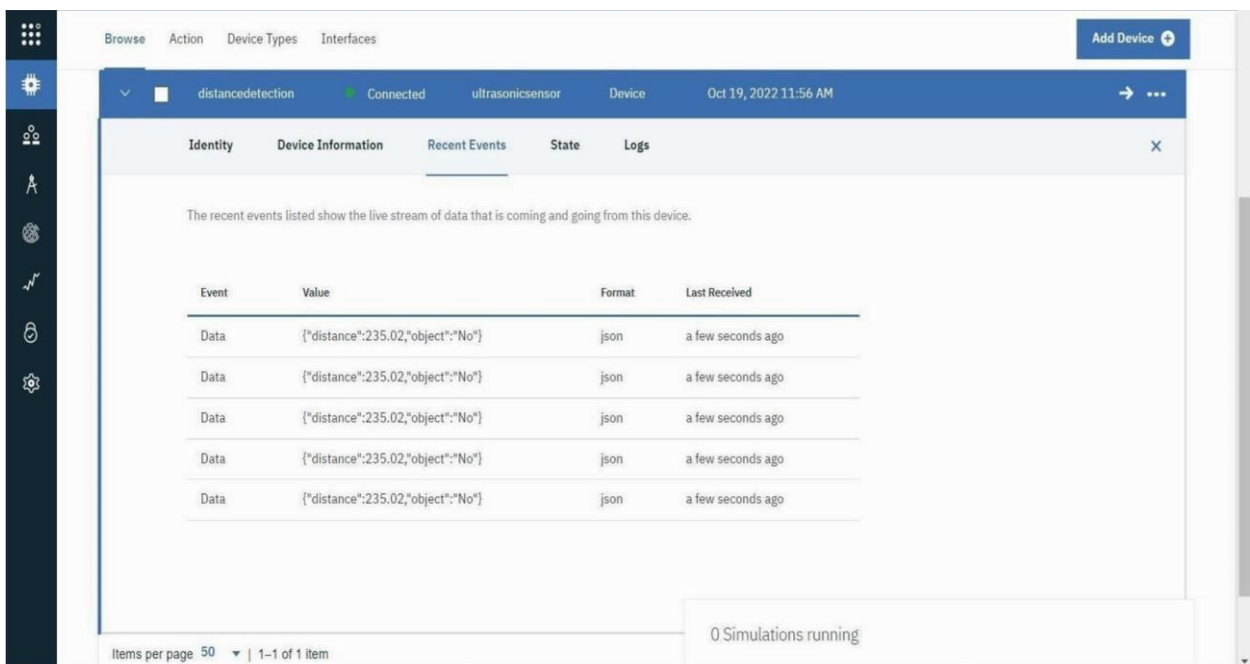

Browse Action Device Types Interfaces

distancedetection Connected ultrasonicsensor Device Oct 19, 2022 11:56 AM

Identity Device Information Recent Events State Logs


The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
Data	{"distance":235.02,"object":"No"}	json	a few seconds ago
Data	{"distance":235.02,"object":"No"}	json	a few seconds ago
Data	{"distance":235.02,"object":"No"}	json	a few seconds ago
Data	{"distance":235.02,"object":"No"}	json	a few seconds ago
Data	{"distance":235.02,"object":"No"}	json	a few seconds ago

Items per page 50 | 1-1 of 1 item

0 Simulations running

## When object is nearer to the ultrasonic sensor

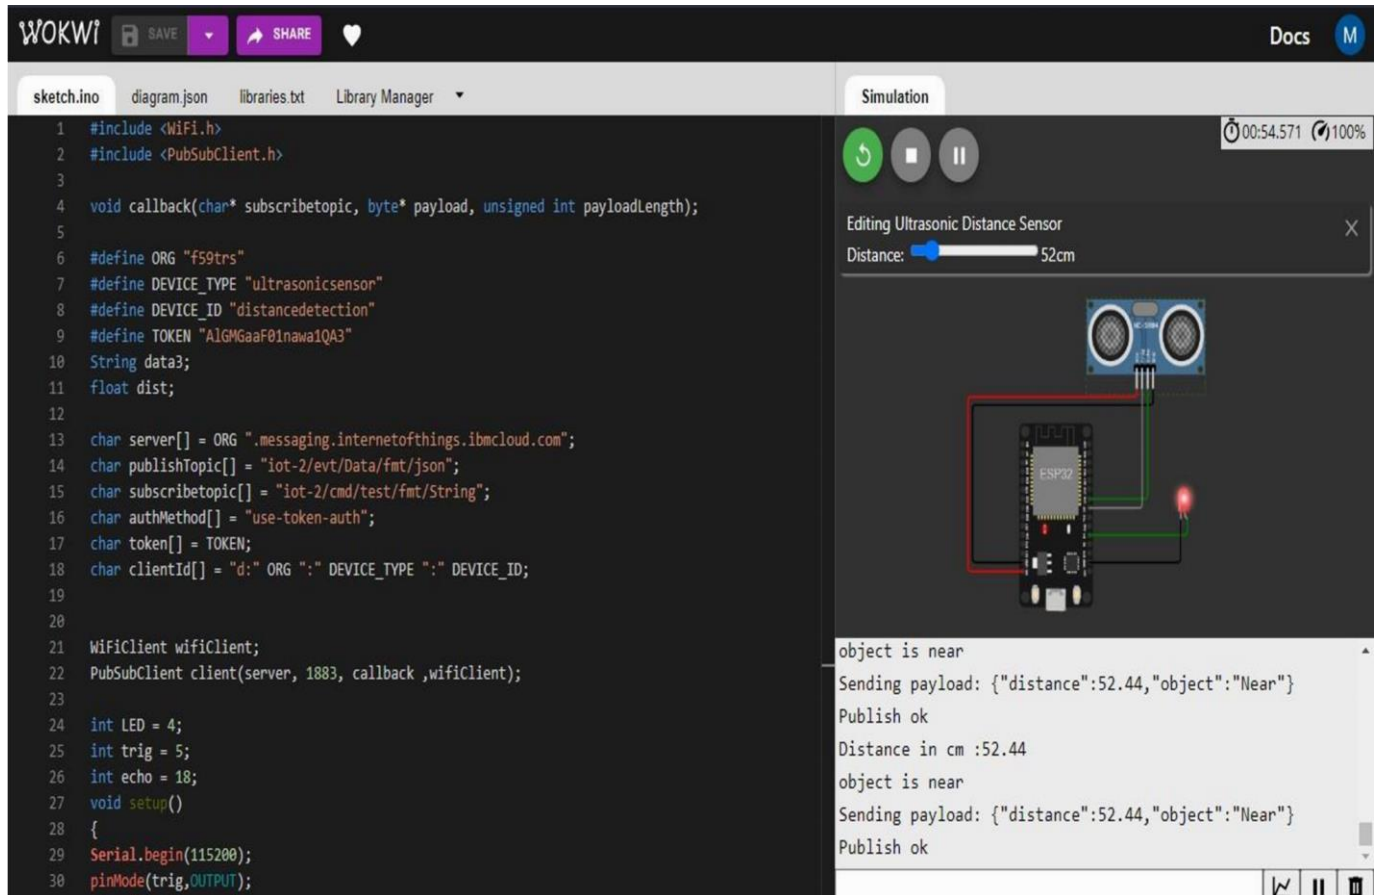


The screenshot displays the Wokwi IDE interface. On the left, the `sketch.ino` file contains the following code:

```
1 #include <WiFi.h>
2 #include <PubSubClient.h>
3
4 void callback(char* subscribtopic, byte* payload, unsigned int payloadLength);
5
6 #define ORG "f59trs"
7 #define DEVICE_TYPE "ultrasonicsensor"
8 #define DEVICE_ID "distancedetection"
9 #define TOKEN "AlGMGaaF0Inawa1QA3"
10 String data3;
11 float dist;
12
13 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
14 char publishTopic[] = "iot-2/evt/Data/fmt/json";
15 char subscribtopic[] = "iot-2/cmd/test/fmt/String";
16 char authMethod[] = "use-token-auth";
17 char token[] = TOKEN;
18 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
19
20
21 WiFiClient wifiClient;
22 PubSubClient client(server, 1883, callback ,wifiClient);
23
24 int LED = 4;
25 int trig = 5;
26 int echo = 18;
27 void setup()
28 {
29   Serial.begin(115200);
30   pinMode(trig,OUTPUT);
```

On the right, the **Simulation** tab shows an ESP32 board connected to an ultrasonic sensor. A slider for the sensor's distance is set to 52cm. The console output shows the following sequence of events:

```
object is near
Sending payload: {"distance":52.44,"object":"Near"}
Publish ok
Distance in cm :52.44
object is near
Sending payload: {"distance":52.44,"object":"Near"}
Publish ok
```

## Data sent to the IBM cloud device when the object is near

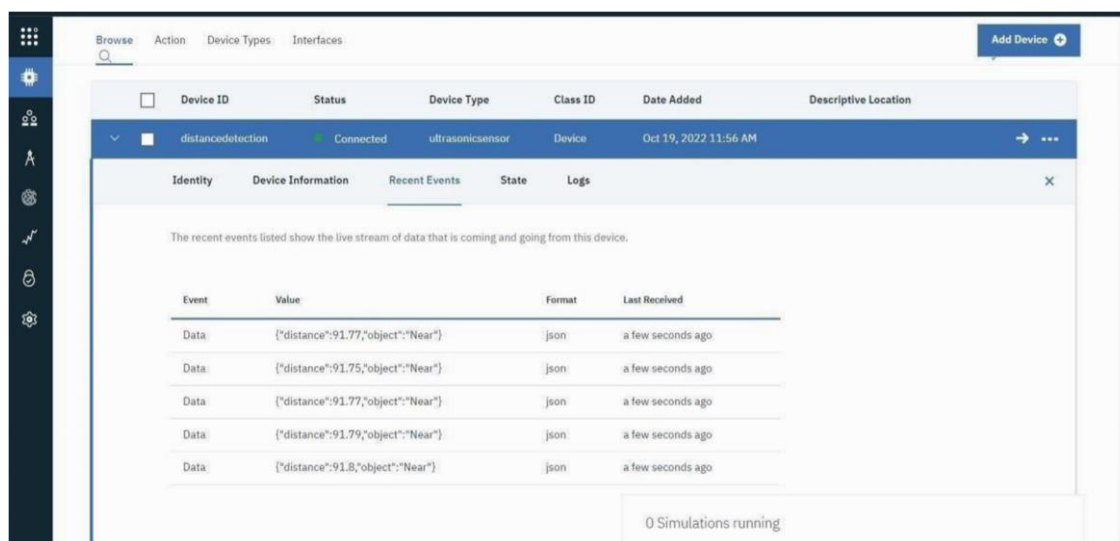

The screenshot shows the IBM IoT Platform dashboard. The **Recent Events** tab is selected, displaying a list of events for the device `distancedetection`. The events are as follows:

Event	Value	Format	Last Received
Data	<code>{"distance":91.77,"object":"Near"}</code>	json	a few seconds ago
Data	<code>{"distance":91.75,"object":"Near"}</code>	json	a few seconds ago
Data	<code>{"distance":91.77,"object":"Near"}</code>	json	a few seconds ago
Data	<code>{"distance":91.79,"object":"Near"}</code>	json	a few seconds ago
Data	<code>{"distance":91.8,"object":"Near"}</code>	json	a few seconds ago

At the bottom of the dashboard, it indicates **0 Simulations running**.