IDEATION PHASE

Literature Survey

Title	IoT Based Safety Gadget for Child Safety Monitoring and Notification.
Domain Name	Internet of Things (IOT)
Team Lead	Gopi V
Team Member	Raja K
	Nandakumar A
	Sundaramoorthy A
Mentor	Suganya J
Team ID	PNT2022TMID29157
College Name	Mailam Engineering College
Department	Electronics and Communication Engineering

IoT Based Safety Gadget For Child Safety Monitoring& Notification

Abstract:

This paper is mainly streamed towards child safety solutions by developing a gadget which can be tracked via its GPS locations and also a panic button on gadget is provided to alert the parent via GSM module calling for help. Parental android app is developed to manage and track the device anytime. Smart gadget device is always connected to parental phone which can receive and make phone calls and also receive SMS on gadget via GSM module, also a wireless technology is implemented on device which is useful to bound the device within a region of monitoring range, if device is moving out of monitoring range, then an alert will be triggered on binding gadget, this helps you keep a virtual eye on child.

Introduction:

The internet of things (IoT) refers to the set of devices and system that stay interconnected with real-world sensor and to the internet. During years' Child safety is under threat and it is very important to provide a technology-based solution which will help them under panic situations and monitor them using asmart gadget. The proposed system is equipped with GSM and GPS modules for sending and receiving call and SMS between safety gadget and parental phone, the proposed system also consists of Wi-Fi module used to implement IoT and send all the monitoring parameters to the cloud for android app monitoring on parental phone. Android application can be used to track the current location of safety gadget using its location coordinates on parental phone android app and also via SMS request from parent phone to safety gadget. Panic alert system is used during panic situations and automatic SMS alert and phone call is triggered from safety gadget to the parental phoneseeking for help and also monitored for plug and unplug from hand, as soon the gadget is unplugged from hand a SMS is triggered to parental phone and the alert parameter is also updated to the cloud.

Literature Survey:

[1] **Authors:** M Nandini Priyanka, S Murugan, K.N.H.Srinivas, T. D. S. Sarveswararao, E. Kusuma Kumari.

Title: Smart IoT Device for Child Safety and Tracking.

Published in 2019 IEEE.

The system is developed using Link-It ONE board programmed in embedded C and interfaced with temperature, heartbeat, touch sensors and also GPS, GSM & digital camera modules. The novelty of the work is that the systemautomatically alerts the parent/caretaker by sending SMS, when immediate attention is required for the child during emergency.

Merits: The parameters such as touch, temperature & heartbeat of the child are used for parametric analysis and results are plotted for the same.

Demerits: To implement the IoT device which ensures the complete solution for child safety problems.

[2] Authors: Akash Moodbidri, Hamid Shahnasser.

Title: Child safety wearable device.


Published in 2017 IEEE.

The purpose of this device is to help the parents to locate their children with ease. At the moment there are many wearables in the market which helps to track the daily activity of children and also helps to find the child using Wi-Fi and Bluetooth services present on the device.

Merits: This wearable over other wearable is that it can be used in any phone, and it is not necessary that an expensive smartphone is required and doesn't want to be very tech savvy individual to operate.

Demerits: As, this device's battery gives short lifetime. Highpower efficient model will have to be used which can be capable of giving the battery life for a longer time


Block diagram of smart gadget

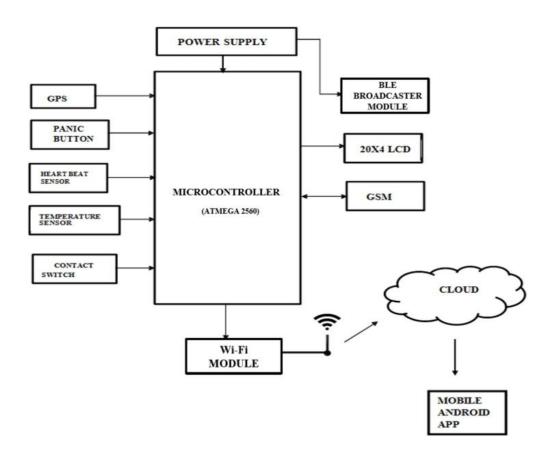

Proposed System:

Safety Gadget:

It consists of inbuilt Wi-Fi, GSM, GPS and Bluetooth modules. The link it one board is similar to the Arduino board, and it is termed as all-in-one prototyping board for safety and IoT devices. The link it one is a robust development board for the hardware and also used for industrial applications. Different components such as temperature sensor, heartbeat sensor, panic button, contact switch are connected to the link it ONE board along with built in GSM, GPS modules. Safety gadget consists of BEACON and BLE packet is transmitted through it, this packet is received by binding gadget which has BLE receiver module, the packet usually contains information such as identification number, signal strength etc. Temperature is one of the most commonly measured variables. For measuring body temperature of the child DS18B20 temperature sensor is used. The heartbeat sensor is used in the proposed system for measuring the pulse rate. There is a heartbeat/pulse sensor which is combined to simple optical heart rate sensor with amplification and nullification circuitry making it is fast and easy to get reliable pulse reading. The GSM/GPRS block is activated with a SIM card on the board

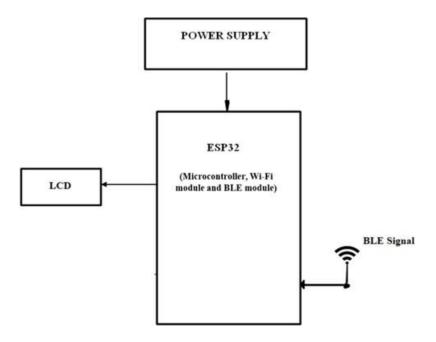

1. Methodology:

This paper mainly focuses on child safety solutions which contain two major devices namely Smart gadget and BLE Listener device. The system also includes an Android app namely Parental App which will be developed and installed on parental phone.

This paper consists of 6 modules as follows:

- 1) Live Location Tracking: Safety gadget contains a GPS module which will fetch the current location and sends it to the microcontroller for required processing, the safety gadget is also installed with the GSM module to respond for location request sent via SMS from parental phone. The system is connected to cloud via Wi-Fi technology and hence the GPS location is updated to the cloud at regular intervals or on request, whenever parent want to monitor the location of safetydevice then parental app can be used which fetches all the data from the updated cloud and also display the current/live location of the safety gadget.
- 2) Panic Alert System: The gadget is equipped with panic alert system feature which mainly consist of a button that is triggered only during certain abnormal/panic situations, this button is programmed in such a way that, once it is triggered then multiple alerts in various forms occurs within few seconds of time, SMS and also phone call is triggered to the parental phone from the safety gadget GSM module to the parental phone, which consists of current location of gadget fetched from its GPS and a pre-installed panic message seeking for help. An alert notification on parental app is triggered via Wi- Fi on safety gadget communicating to cloud where parental appreceives the information.

- 3) Stay Connected Feature: This feature is to communicate between safety gadget (GSM module) and parental phone always connected irrespective of the situation, safety gadget canmake a phone call anytime to parental phone and vice-versa. Safety gadget which will be displayed on its screen.
- **4) Health Monitoring System:** The gadget consists of heartbeat and temperature sensor which is used to monitor the general health condition of child. Any abnormalities being detected in the health monitoring parameters by the safety gadget then an immediate alert is sent on the parental app via Wi-Fi. Also, displays on parental app.
- 5) Gadget Plug and Unplug Monitoring: This feature is to keep monitoring if the safety gadget is plugged or not by monitoring the contact switch, necessary alerts are provided onparental app whenever the device is unplugged.
- 6) Boundary Monitoring System: Binding gadget is the device which is used to satisfy this feature along with safety gadget and parental phone. This gadget is used to monitor safety gadget within a bounded area using wireless technology. Once the safety gadget is moving out of the threshold distance from the BLE listener device then an alert is provided on device itself, which will be used by parent/guardian. This feature of binding gadget is designed to work independently without phone network signal/internet so that safety gadget can even be under monitoring when it reaches remote areas where communication signals are not reachable like forest.

2. <u>Software Specification:</u>

The Arduino Software (IDE) which is an open-source and makes it easy to write the code as well as to upload into the board. It runs on the Linux, Mac, IOS and Windows. The programs are written in Java, based on the Processing and otheropen-source software. This software makes the interfacing with Arduino-Uno much more reliable. The primary reason for using the GS shield as the mode of communication over Wi-Fi and Bluetooth was that this gadget was aimed at being accessible to any smartphone user. Also, to make the user- friendly as possible. Applications for the Android operating system are programmed using the SDK Android software development kit and Java programming language that also may be used with C or C++.

3. Results:

- a) Live Location Tracking: GPS is installed on gadget to track its current location can be tracked on android app and viaSMS request sent from parent phone to safety gadget.
- **b) Panic Alert Systems:** Panic alert system on gadget is triggered during panic situation, automatic call and SMS are triggered to parental phone. The alert is also updated to the cloud for purpose of app monitoring

- c) Stay Connected Feature: Stay connected feature is used totrigger call and predefined SMS anytime from gadget to parental phone by just pressing a button and also parent can make SMS and call to the gadget anytime.
- **d) Health Monitoring System:** Health monitoring system is implemented using heartbeat sensor, temperature sensor which is updated to the cloud and also can be monitored via app. The current value of sensors can be obtained using SMS request sentto gadget from parent phone.
- **e) Gadget Plugged or Unplugged Monitoring:** Gadget plug or unplugged is monitored using contact switch installed on smart gadget, as soon as the device is unplugged, an alert is provided to parent phone via SMS, and it is also updated to cloudfor app monitoring.
- **f) Boundary monitoring system:** This is used to track the safety gadget using the binding gadget by implementing signal strength concept as soon as the safety gadget moves far away from the BLE listener gadget then an alert is provided to itself.
- **4.** <u>Limitation:</u> The system is dependent on communication signal/network signal for the smart gadget to trigger automatic phone call/SMS during panic situation. It can be difficult to detect when network signal is not reachable/weak/when the smart gadget moves outside the boundary range. Hence, it can be improved by increasing the range.
- **5.** <u>Future Scope of Work:</u> This system can be further enhanced by installation of mini-camera inside smart gadget for better security so that live footage can be seen on parental phone during panic situations. The system can be modified by installation of small solar panels for charging the battery of smart gadget to gain maximum battery backup.

Conclusion:

This research demonstrates Smart IoT device for child safetyand tracking, to help the parents to locate and monitor their children.

If any abnormal readings are detected by the sensor, then an SMS and phone call is triggered to the parent's mobile. Also, updated to the parental app through the cloud. The system is equipped with GSM and GPS modules for sending and receiving call, SMS between safety gadget and parental phone. The system also consists of Wi-Fi module used to implement IoT and send all the monitored parameters to the cloud for android app monitoring on parental phone. Panic alert system is used during panic situations alerts are sent to the parental phone, seeking for help also the alert parameters are updated to the cloud. Boundary monitoring system is implemented on safety gadget with the help of BEACON technology, as soon as the safety gadget moves far away from the BLE listener gadget an alert is provided to itself.

References

- [1] M Nandini Priyanka, S Murugan, K. N. H. Srinivas, T. D. S. Sarveswararao, E. Kusuma Kumari, 'Smart IoT Device for Child Safety and Tracking' International Journal of Innovative Technology and Exploring Engineering, Volume 8, Issue 8, June 2019.
- [2] Akash Moodbidri, Hamid Shahnasser (Jan. 2017) 'Child safety wearable device', International Journal for Research in Applied Science & Engineering Technology, Vol. 6 Issue 2, pp. 438-444.
- [3] Aditi Gupta, Vibhor Harit, 'Child Safety & Tracking Management System by using GPS, Geo-Fencing & Android Application: An Analysis,' 2016 Second International Conference on Computational Intelligence & Communication Technology.
- [4] Dheeraj Sunehera, Pottabhatini Laxmi Priya, 'Children Location Monitoring on Google Maps Using GPS and GSM,' 2016 IEEE 6th International Conference on Advanced Computing.
- [5] Asmita Pawar, Pratiksha Sagare, Tejal Sasane, Kiran Shinde (March—2017) 'Smart security solution for women and children safety based on GPS using IoT', International Journal of Recent Innovation in Engineering and Research, vol. 2, Issue 3, pp. 85-94.
- [6] Nitishree, (May-June, 2016) 'A Review on IOT Based Smart GPS Device for Child and Women Safety', International Journal of Engineering Research and General Science, Vol. 4, Issue 3, pp. 159-164.
- [7] Pramod, M Uday Bhaskar, Ch. V and Shikha, K. (January 2018) 'IoT wearable device for the safety and security of women and girl' International Journal of Mechanical Engineering and Technology, Vol. 9, Issue 1, pp. 83-88.
- [8] Anand Jatti, Madhvi Kannan, Alisha, RM Vijayalakshmi, P Shrestha Sinha (May 20-21, 2016), 'Design and Development of an IoT based wearable device for the Safety and Security of women and girl children' IEEE International Conference on Recent Trends in Electronics Information Communication Technology, India, pp. 1108-1112.
- [9] Sarifah Putri Raflesia, Firdaus, Dinda Lestarini, 'An Integrated Child Safety using Geo-Fencing Information on Mobile Devices', International Conference on Electrical Engineering and Computer Science (ICECOS) 2018.
- [10] Anwaar Al-Lawati, Shaikha Al-Jahdhami, 'RFID-based System for School Children Transportation Safety Enhancement', Proceedings of the 8th IEEE GCC Conference and Exhibition, Muscat, Oman, 1-4 February 201