### IOT BASED SAFETY GADGET FOR CHILD SAFETY MONITORING AND NOTIFICATION

#### A NALAIYATHIRAN PROJECT REPORT

#### Submitted by

S.NO	NAME	REGISTER NO
1	THEO THRINISHA MARY. E	815119106044
2	ANITHA .P	815119106005
3	NAGESWARI . S	815119106024
4	MALARVIZHI . M	815119106302

#### in partial fulfilmentfor the award of the degree

of

#### **BACHELOR OF ENGINEERING**

in

#### **ELECTRONICS AND COMMUNICATION ENGINEERING**

# HX8001 - "PROFESSIONAL READINESS FOR INNOVATION EMPLOYABILITY AND ENTREPRENEURSHIP" DHANALAKSHMI SRINIVASAN INSTITUTE OF TECHNOLOGY, SAMAYAPURAM, TRIUCHIRAPALLI

ANNA UNIVERSITY :: CHENNAI 600 025 2022-20

#### **CONTEXT**

1	INTRODUCTION
1.1	Project Overview
1.2	Purpose
2	LITERATURE SURVEY

2.1	Existing problem	
2.2	References	
2.3	Problem Statement Definition	
3	IDEATION & PROPOSED SOLUTION	
3.1	Empathy Map Canvas	
3.2	Ideation & Brainstorming	
3.3	Proposed Solution	
3.4	Problem Solution fit	
4	REQUIREMENT ANALYSIS	
4.1	Functional requirement	
4.2	Non-Functional requirements	
5	PROJECT DESIGN	
5.1	Data Flow Diagrams	
5.2	Solution & Technical Architecture	
5.3	User Stories	
6	PROJECT PLANNING & SCHEDULING	
6.1	Sprint Planning & Estimation	
6.2	Sprint Delivery Schedule	
6.3	Reports from JIRA	
7	CODING & SOLUTIONING (Explain the features added in the project along with code)	
7.1	Feature 1	
7.2	Feature 2	
8	TESTING	
8.1	Test Cases	
8.2	User Acceptance Testing	
9	RESULTS	
9.1	Performance Metrics	
10	ADVANTAGES & DISADVANTAGES	
11	CONCLUSION	
12	FUTURE SCOPE	
13	APPENDIX	
13.1	Source Code	
13.2	GitHub & Project Demo Link	

#### **ABSTRACT**

Attacks on children have been on the rise at an unprecedented rate in recent years, with victimsfinding themselves in perilous situations with littlechances of contacting their families. Themain goal of this project is to create a smart wearabledevice for children that uses

advanced technologyto ensure their safety. As a result, this strategy is perceived as sending an SMS from the children's wearable to their parents or guardians. This project employs cutting-edge technology to protect the youngster through the use of a GSM module, ensuring that the child does not feel abandoned while dealing with such social issues. An Arduino Nano, GSM, GPS, temperature sensor, heartbeat sensor, and a panic button will be included in the wearable. The heartbeat sensor detects the child's heart rate and delivers it to the guardian on a regular basis. If the child falls suddenly, the accelerometer detects it and alerts the parents. As a result, the parent has a sense of security.

### CHAPTER 1 1.INTRODUCTION

The Internet of effects is a network containing numerous physical biases, vehicles, electronic corridor, software, detectors, selectors, etc. It substantially enables these bias to efficiently, and intelligently connect these objects to collect the data and usefully change it for a purpose. The term IoT was first chased by Kevin Ashton in the time 1999. Internet Of effects(IoT) associates to be tasted and connect ever to cover the formerly being network and its structure. The important vision of IoT has evolved due to a confluence of colorful technologies, including ubiquitous wireless communication, real- time analytics, detectors, bedded systems, etc.

It's a technology that allows objects to be tasted or controlled ever across being network structure having multitudinous bias connected to it. These bias collect useful data with the help of colorful being technologies and also autonomously flow the data between other bias. In moment's script, over 80 of the world population affected towards the new technologies developed, including children by the operation of mobile phones, smart bias, laptops, and other smart outfit are also increased. This proposed system will be largely effective from other being ways in helping the victims. The system uses Arduino for the process integrated with detectors like temperature detectors, twinkle detectors, etc. The children with Activity Tracker that has access to IoT monitoring and GSM technology keep covering the children. The system has detectors connived with the processor which keeps seeing vital signals similar as twinkle rate, temperature, etc. So whenever some dangerous situations arise there may be an suggestion to parents. The parent can circumscribe the safety distance for each child and when it's overhauled the system will alarm both the parent and child. When the child crosses the zone( say a academy

zone) unfortunately due to some importunity, also the system automatically sends the information to the parents.

Children can not complain about abusements that they face in their diurnal life from their parents. They can't indeed realize what happens to them at their age. It's also delicate for parents to identify whether their children are being abused. Since to help children from being attacked, an independent real- time monitoring system is necessary for every child out there. In this system, the collected values from every detector like temperature detector, palpitation rate discovery detector, essence discovery detector, and the position value from GPS are used to descry the status of the child.

The Internet of effects( IoT) plays a major part in every day to day life. The major difference between IoT Internet bedded systems is that a devoted protocol/ software is bedded in the chip in case of an bedded system, whereas, IoT bias are smart bias, which can take opinions by seeing the terrain around the device. The development of detectors technology, vacuity of internet- connected bias; data analysis algorithms make IoT bias act smart in extremities without mortal interventions. So, IoT bias are applied in different fields similar as husbandry, drug, artificial, security and communication operations.

IoT systems are useful within a system to do deeper robotization, analysis, and integration. IoT contributes to technology through advances in software, tackle, and ultramodern tools. It indeed uses being and forthcoming technology in the fields of seeing, networking, and robotics. IoT brings global changes through its advanced rudiments in the social, profitable, and political impact of the druggies.

Child and women's safety is a grueling problem currently due to asocial rudiments in society. The crime rate is day by day adding . seminaries and workplaces need high surveillance for icing the safetyamong children and women.

Smart phones are playing major Part in rising the safety, where some mobile grounded operations give alert systems. During the exigency, mobile apps warn the control room of near police station or caretakers of children. The literature shows that position shadowing bias are available in the request, but it doesn't give the complete result to the problem. The result to this problem is to design an IoT device, which senses the child's position and terrain and during exigency, it should shoot the alert to the parents automatically

#### 1.1 PROJECT OVERVIEW

#### a. PROJECT OVERVIEW:

A smart mobile phone provides various up to date services to us. Using the global positioning system (GPS), we can get to know our devices' geographic locationand give information through hort message service (SMS) service. Al-Mazloum et al. used these two services in their proposed system. They introduced GPS and SMS-based child tracking system using smart phone. This paper describes how a smart mobile phone helps parents track their children in real-time. Most kids and parents use an android mobile phone, and they know the mobile phone's available service. Their proposed system consists of two sides, the child side and the parent side. A request SMS goes to the child's device to know the child's exact location from the parent device.

After getting the request SMS, the child's device replies to the parent's device's GPS position. Kothawade et al. proposed a system "multi-platform application for parent and school using GPS tracking". In this paper, they developed a GPS based application system for an organization and parents mobiles. The organization can use this application for monitoring and tracking the location of the schoolbuses.

Parents can get the addresses of their childrenand locate them on his/hermobile devices. Schoolauthority also can monitor and track the school buses timely and ensures the safety of children. It also allows parents to track real-time information about the school bus during travels. Almomani et al. proposed a system with two types of applications a web application and a mobile application for a user facility. A user can access this system at any time from anywhere. There are two sides: client-server.

The server-side carries a GPRS, a web, and an SMS server, and the client-side contains a GPS tracker and a GPS modem. The user information is stored in the database on the server-side. There is another similar concept used by Al-Suwaidi and Zemerly in their proposed system named "locating friends and family using mobile phones with a global positioning system (GPS)". They have also developed two approaches: the client-server approach. This paper showed both clients have the same control and command privileges, whereas the other system does not provide it. Gaoet al. developed a security method named

child guard on smart devices for observing children's activities in real-time. Guardians used this system at a low cost, and they can get better benefits by using this system. Satish et al. described their paper about an androidapplication used to track missing children.

The android application works with two services: GPS and SMS service. The GPS is used to track the location of themissing child. If GPS service is unable, the application can work with SMS service by sending and receiving the message. There is another paper where the researcher Bhoiet al. implements a project based on a particular area for each child. When the child comes out of this specific area of their school, then an alert message sends to the parent's mobile phone by using a panic switch. Saranyaet al. proposed a child monitoring system based on android phones for the children's security. This system helps the parents to know whether their children are safe or not. This system consists of two functions. The software hand function monitors the child's activities, and the danger zone function alerts the guardians about their children's location

#### 1.2 PURPOSE

In today'stechnological world, it's a naturalpart of life for older children and young teenagersto have gadgets. In many ways, gadgets such as mobile phones can help give them a safety edge, yet having the latest and greatest mobiles can also put them at risk of danger. Cruel crimes against children have been on the rise in recent years, with victims finding themselves in incredibly perilous situations where using their cellphones to notify their parents or the police is nearly impossible. Despite the fact that technology is constantly evolving, these acts continue to occur in numerous areas. The major goal of this project is to use modern technology to create a gadget that provides "Smart Child Safety" to protect children, which will be far more effective than currentmethods in assisting victims.

#### **CHAPTER 2**

#### 2. LITERATURE SURVEY

### 01) International Journal on Recent and Innovation Trends in Computing and Communication ISSN: 2321-8169 Volume: 6 Issue: 5 (pg.no:200-201)

KhasimShaik, SanthosiBogaraju Proposed "Implementation of novel application for woman and child protection using IOT enabled techniques" This system focused on a wireless method which will send alert and communicate with a secure medium. The system here is based on smart phone which will be very much useful in helping victims. Women will be provided with smart band and the smart phone that has access to the GPS tracking mechanism that gets the location and these location values are displayed on the LCD. The Smart band is integrated with Smart phone and The GPS and the GSM can be used. The smart phone is connected to smart band watch through Bluetooth Low Energy (Bluetooth 4.0) module.

The device communicates with phone through an application designed specially that acts an interface between the smart band and the phone. Helen. A, FathimaFathila proposed "A smart watch for women security based on IOT concept "watch me" The "Watch me" was designed in a way to secure women when they are exposed to external challenges and harassments in the society. Women safety by smart phone can be activated International only by a touch or one click. It is impossible to have mobiles on our hand under all circumstances. In such situations this watch me concept can be used. It works automatically based on heart beat rate which increases due to the secretion of epinephrine hormone from hpa axis that is specifically defined for each and every situation like fear, anger, anxiety and other reactions triggering the sensors automatically. Ms. Deepali, M. Bhavale, proposed "IOT based unified approach for women and children security using wireless and GPS" This system explains that the main goal of this project is to preserve the security of women and school children using a wireless portable safety device and school bus tracking system. This system consists of an emergency "PRESS" button and an electronic camera for capturing image. When the sensor kit button is pressed the camera will captures the image and will collect the information of the user. This system uses a wireless method which will alert and communicate with secure medium. Kavita Sharma, Anand More proposed "ADVANCE WOMAN SECURITY SYSTEM BASED ON ANDROID" This android application was designed to provide security and provide awareness on the time of critical situation for women.

This proposed system is GSM & GPS Based women Security System. The main objective of security system is to track the current location of the victim having an android

enabled mobile by extracting the longitude and latitude of that target person. The GPS device is placed inside the device (Android Phone). An emergency button is fixed on the device at a particular position. Generally service is made active by clicking on ACTIVE SERVICE button. On clicking this, button service gets activated and clicking on VOLUME key a new window is opened and SMS is sent to those contacts saved already at the time of registration. The SMS contain alert message and the current location. Shree Varsha. K, Dr. UmaraniSrikanth proposed "A survey on android application for personal security" The project explained that when the user touches the application, within few seconds the app will be executed automatically and turns on the camera in order to capture the images (victim"s surrounding). The app picks up the user"s GPS location (Current Location) exactly and shares it along with location to the nearest helpers (Ambulance, Police Station, etc).

The main feature of this application is that the helper will get the details of user (Image, address and personal information) in order to avoid fake details. The nearby helpers can be found using cloud crawling techniques according to the affected users. Nagaraju. J, Sadanandam. V proposed, "Self-salvation – the women"s security module" The main idea of this project was to help and guard the women to prevent themselves from kidnaps and chain snatchings. Here three methods of Safety and security for women are introduced. In each and every method there will be an alert message that is sent to the existing Phone Numbers through GSM technology. The purpose of using GPRS is that to track the location and position. Also a Smart Phone app is developed for controlling and for sending the alert message to the parents and police station. Women will be provided with equipment which is not visible to others. Nitishree proposed "A review on IOT based smart GPS device for child and women safety applications" The paper was based on IOT (Internet of Things).

This paper proposes an Android based solution to aid parents to track their children in real time. The concerned device is connected to server via internet. The device can be used by parents to track their children in real time or for women safety. The proposed solution takes the advantage of the location services provided by GSM. It allows the parents to get their child, solution on real time by SMS. Here, a prototype model (device) is created which is simulation based. The work comprises ARM-7 LPC2148 as microcontroller, along with GPS and GSM module. Embedded C core compile using Keil and virtual simulation check using Proteus 8.1 is done. A server is created which will collect all the data generated by our prototype system and send the same to server using GPRS. A Dummy server will be created by using Filezilla. This

device will also have the facility of Emergency help key (SOS), if anyone presses the key, automatic help message will be sent to 3 registered mobile numbers on Server. AbhijitParadkar proposed, "All in one intelligent safety system for women security" A model had been proposed for the women security in public places which aims to provide the 100% safe environment. The integration of various existing systems on women security has been gathered together. An advanced women security system to provide the safety measure in public places as well as travelling alone through public transports have been introduced finally.

The proposed system can be implemented as an android app application or using Arduino based board. It consists of Database Module, SOS Key Press Module and Voice Recognition Module, Auto receiving call module, Global Positioning System (GPS) module, GSM System Module, Spy camera detection module, Intrusion Detection Module, Area zone module, Fake call Tool Module, Action after getting the Handler Notification, Audio and video recording module, Call on 100 or other emergency number, Generate Electric Shock for Self Defense module, Screaming Alarm Siren module all integrated within a single module Vijaylashmi. B, Renuka. S proposed "Self defense system for women safety with location tracking and SMS alerting through GSM network" The proposed idea was a quick responding; cost protection system for women in distress can call for help just with the press of a button on smart band. It has the ability to help women wearing this device as a watch or band, in case of any harassment .By the press of a switch that is located on the watch or band or when the women has fallen the information about the attack along with the body posture and location information is sent as SMS alert to a few predefined emergency numbers. The system consists of embedded hardware and software co-designed for this dedicated application. It allows for exact location of the victim, as soon as the Emergency key on the belt is pressed.

02) International Conference on Physics and Photonics Processes in Nano Sciences Journal of Physics: Conference Series 1362 (2019) 012012 IOP Publishing doi:10.1088/1742-6596/1362/1/012012

#### A. RFID-based System for School Children Transportation Safety Enhancement

This paper presents a system to monitor pick-up/drop-off of school children to enhance the safety of children during daily transportation from and to school. The system consists of two main units, a bus unit, and a school unit. The bus unit the system is used to

detect when a child boards or leaves the bus. This information is communicated to the school unit that identifies which of the children did not board or leave the bus and issues an alert message accordingly. The system has a developed web-based database-driven application that facilities its management and provides useful information about the children to authorized personnel. A complete prototype of the proposed system was implemented and tested to validate the system functionality. The results show that the system is promising for daily transportation safety.

### B. Design and Development of an IOT based wearable device for the Safety and Security of women and girl children

The aim of this work is to develop a wearable device for the safety and protection of women and girls. This objective is achieved by the analysis of physiological signals in conjunction with body position. The physiological signals that are analyzed are galvanic skin resistance and body temperature. Body position is determined by acquiring raw accelerometer data from a triple axis accelerometer. Acquisition of raw data is then followed by activity recognition which is a process of employing a specialized machine learning algorithm. Real-time monitoring of data is achieved by wirelessly sending sensor data to an open source Cloud Platform. Analysis of the data is done on MATLAB simultaneously. This device is programmed to continuously monitor the subject's parameters and take action when any dangerous situation presents itself. It does so by detecting the change in the monitored signals, following which appropriate action is taken by means of sending notifications/alerts to designated individuals.

#### C. Child Safety Wearable Device

Parents need not have a smart mobile. Set of keywords are used to gain information from the kit. LOCATION keyword is used to obtain the location of the child. UV keyword is used to obtain the temperature of the surroundings. BUZZ keyword is used to turn on the buzzer which is fixed in that device. SOS is used to send a signal to the device.

#### D. Smart Intelligent System for Women and Child Security

A portable device which will have a pressure switch. As soon as an assailant is about to attack the person or when the person senses any insecurity from a stranger, he/she can then put pressure on the device by squeezing or compressing it. Instantly the pressure sensor senses this pressure and a conventional SMS, with the victim's location will be sent to

their parents/guardian cell phone numbers stored in the device while purchasing it, followed by a call. If the call is unanswered for a prolonged time, a call will be redirected to the police and the same message will be sent. Additionally, if the person crosses some area which is usually not accessed by the person then a message with the real-time location is sent to the parent/guardian's phone via conventional SMS.

#### 2.1 EXISTING PROBLEM

#### **Real-Time Child Abuse and Reporting System**

In the existing system, we use a voice recognition module in which the alert commands from the child are stored and kept for further reference. If the same child delivers the same command, it will compare with the alert command which was previously stored and sets an emergency level according to the alert command. The GSM has a SIM which is used to send an alert message or an alert call to the trusted peoples. GPS is used to track the live location and it is used when needed. The server will search the respective device ID from the database and search for respective contacts according to that device ID and helps in alerting the registered guardians.

The disadvantage of this project are,

- The child could not produce the exact alert command during a panic condition.
- ii. The command produced may not match with the previously stored command.
- iii. This project requires manual intervention.

#### 2.2 REFERENCES

### 01) International Journal on Recent and Innovation Trends in Computing and Communication ISSN: 2321-8169 Volume: 6 Issue: 5

[1] Alexandros Pantelopoulos, Nikolaos G. Bourbakis, "A Survey on Wearable Sensor - Based Systems for Health Monitoring and Prognosis", IEEE Transactions on Systems, Man, and Cybernetics, Volume - 40, Issue - 1, January 2010.

- [2] Abhijit Paradkar, Deepak Sharma, "All in one Intelligent Safety System for Women Security", International Journal of Computer Applications, Volume 130, November 2015.
- [3] Bharathi. G, Ramurthy. L, "Implementation Of Children Tracking System Using ARM Microcontroller", International Journal of Industrial Electronics and Electrical Engineering, Volume 2, December 2014.
- [4] Deepali M. Bhavale, Ms. Priyanka S. Bhawale, Ms. Tejal Sasane, Mr. Atul S. Bhawale, "IOT Based Unified Approach for Women and Children Security Using Wireless and GPS", International Journal of Advanced Research in Computer Engineering & Technology (IJARCET), Volume 5, August 2016.
- [5] Gatzoulis L, Iakovidis L, "Wearable and Portable eHealth Systems", IEEE Engineering in Medicine and Biology Magazine, Volume 26, September October 2007.
- [6] Harikiran. G. C, Karthik Menasinkai, Suhas Shirol, "Smart security solution for women based on Internet of Things", Volume 3, IEEE 2016.
- [7] Helen. A, Fathima Fathila. M, Rijwana. R, Kalaiselvi .V.K.G, "smart watch for women security based on IOT concept "watch me", International Conference on Computing and Communications Technologies IEEE 2017.
- [8] Khasim Shaik, Santoshi Bogaraju, "Implementation of Novel Application for Woman and Child Protection Using IOT Enabled Techniques", International Journal of Advanced Research in Computer Science, Volume 8, March April 2017.
- [9] Khaled Shaaban, Abdelmoula Bekkali, Elyes Ben Hamida, and Abdullah Kadri, "Smart Tracking System for School Buses Using Passive RFID Technology to Enhance Child Safety", Journal of Traffic and Logistics Engineering, Volume 1, December 2013.
- [10] Kavita Sharma, Anand More, "Advance Woman Security System based on Android", IJIRST- International Journal for Innovative Research in Science & Technology, Volume 2, May 2016. Electronic Publication: Digital Object Identifiers (DOIs):
- 02) International Conference on Physics and Photonics Processes in Nano Sciences Journal of Physics: Conference Series 1362 (2019) 012012 IOP Publishing doi:10.1088/1742-6596/1362/1/012012

- [1] AkashMoodbidri, Hamid Shahnasser, "Child Safety Wearable Device", Department of Electrical and Computer Engineering San Francisco State University.
- [2] AnandJatti, MadhviKannan, Alisha RM, Vijayalakshmi P, ShresthaSinha, "Design and Development of an IOT based wearable device forthe Safety and Security of women and girl children ", IEEE International Conference On Recent Trends In Electronics Information Communication Technology, May 20-21, 2016, India.
- [3] Anwaar Al-Lawati, Shaikha Al-Jahdhami,
- [4] "RFID-based System for School Children Transportation Safety Enhancement ", Proceedings of the 8th IEEE GCC Conference and Exhibition, Muscat, Oman, 1-4 February 2015.
- [5] Dr. R. Kamalraj, "A Hybrid Model on Child Security and Activities Monitoring System using IoT", IEEE Xplore Compliant Part Number: CFP18N67-ART; ISBN:978-1-5386-2456-2.
- [6] Pooja.K.Biradar1, Prof S.B.Jamge2," An Innovative Monitoring Application for Child Safety", DOI:10.15680/IJIRSET.2015.0409093.
- [7] Prof. Sunil K Punjabi, Prof. Suvarna Chaure, "Smart Intelligent System for Women and Child Security" Department of Computer Engineering SIES Graduate School of Technology Nerul, Navi Mumbai, India.
- [8] Sarifah Putri Raflesia, Firdaus, Dinda Lestarini, "An Integrated Child Safety using Geofencing Information on Mobile Devices", INTERNATIONAL CONFERENCE ON ELECTRICAL ENGINEERING AND COMPUTER SCIENCE (ICECOS) 2018.
- [9] Zejun Huang1, ZhigangGao," An Mobile Safety Monitoring System for Children", 2014 10th International Conference on Mobile Ad-hoc and Sensor Networks.-
- 03) International Journal of Innovative Technology and Exploring Engineering (IJITEE) ISSN: 2278-3075, Volume-8 Issue-8 June, 2019
- 1. Starner, T Schiele, B and Pentland, A. (1998) 'Visual contextual awareness in wearable computing', Second International Symposium on Wearable Computers, Pittsburgh, PA, IEEE Computer Society, pp. 50-57.

- 2. AkashMoodbidri, Hamid Shahnasser (Jan 2017) 'Child safety wearable device', International Journal for Research in Applied & Engineering Technology, Vol. 6 Issue II, IEEE, pp. 438-444.
- 3. AsmitaPawar, PratikshaSagare, TejalSasane, KiranShinde (March— 2017) 'Smart security solution for women and children safety based on GPS using IOT', International Journal of Recent Innovation in Engineering and Research, vol. 02, Issue. 03, pp.85-94.
- 4. Nitishree, (May-June, 2016) 'A Review on IOT Based Smart GPS Device for Child and Women Safety', International Journal of Engineering Research and General Science, Vol.4, Issue. 3, pp. 159-164.
- 5. Kok Sun Wong, Wei Lun Ng, Jin Hui Chong, CheeKyun Ng, AduwatiSali, Nor KamariahNoordin, (15 -17 )December 2009) 'GPS Based Child Care System using RSSI Technique', Proceedings of the Malaysia International Conference on Communications. pp. 899-904.
- 6. SeungHee Lee, JaheeSohn, Atsushi Usami, and Masatoshi Hamanaka (2010)'Development of Wearable Device by Kid's Friendly Design for Kid's Safety' International Federation for Information Processing, IEEE.
- 7. Jonny Farringdon, Andrew J. Moore, Nancy Tilbury, James Church & Pieter Biemond .D (october 1999) 'Wearable Sensor Badge & Sensor Jacket for Context Awareness', International symposium on Wearable computers, ISWC 99 proceedings of the 3rd IEEE pp107.
- 8. Pramod, M UdayBhaskar, Ch V and Shikha, K. (January 2018) IOT wearable device for the safety and security of women and girl' International Journal of Mechanical Engineering and Technology, Vol 9, Issue 1, pp. 83-88.
- 9. AnandJatti, MadhviKannan, Alisha,RMVijayalakshmi, P ShresthaSinha (May 20-21, 2016), 'Design and Development of an IoT based wearable device for the Safety and Security of women and girl children' IEEE International Conference On Recent Trends In Electronics Information Communication Technology, India, pp. 1108-1112.
- 10. Chitra, jewel jose, sandeep, shirinidhishetty, A. (2018) 'smart safety jacket for smallbaby' yenepoyainstittite of technology, moodbidr.

- 11. Healey J. and Picard, R. (October 1998) 'Startlecam A cybernetic wearable camera', Second International Symposium on Wearable Computers, Pittsburgh, PA, IEEE Computer Society, pp. 42-49.
- 12. Ross D. and Sanford, J. (1997) 'Wearable computer as a remote interface for people with disabilities', in First International Symposium on Wearable Computers, Cambridge, MA, IEEE Computer Society, pp. 161-162.
- 13. Bradley J. Rhodes, Nelson Minar and Josh Weaver (Aug. 4, 1999) 'Wearable Computing Meets Ubiquitous Computing', pp. 471-475.
- 14. Cornelia Setz, Bert Arnrich, Johannes Schumm, Roberto La Marca, and Gerhard Troster, (March 2010) 'Discriminating Stress From Cognitive Load Using a Wearable EDA Device', IEEE transactions on Information Technology in Biomedicine, Vol. 14, No. 2. pp. 410- 417.
- 04) Atlantis Highlights in Computer Sciences, volume 4 Proceedings of the 3rd International Conference on Integrated Intelligent Computing Communication & Security (ICIIC 2021)
- [1] Arun Francis G, Janani I, Kavya S and Ramiyadevi K. Child Safety Wearable Device Using Raspberry Pi. Waffen-UND Kostumkunde Journal. 11(2). 2020. pp.135-137.
- [2] A. Helen, Kalaiselvi V.K.G, M. Fathima Fathila and R. Rijwana. A smart watch for women security based on iot concept 'watch me', International Conference on Computing and Communications Technologies (ICCCT). 2017.
- [3] Alexey Vinel Feng Xia and Laurence T. Yang and Lizhe Wang. Internet of Things. International Journal of Communication Systems. 25(9). 2012. pp.1101-1102. DOI: <a href="https://doi.org/10.1002/dac.2417">https://doi.org/10.1002/dac.2417</a>
- [4] Anjum Khairi, M.U. Farooq, Muhammad Waseem, Sadia Mazhar and Talha Kamal, M.U. Farooq, Muhammad Waseem and Sadia Mazhar. A Review on Internet of Things (IoT). International Journal of Computer Applications. 113(1). 2015. pp.1-7. DOI: https://doi.org/10.5120/19787-1571
- [5] Arun K Mani1, M.Gokilavani, Shreevani D, Samra Said and Unnikrishnan K N. A Review: IoT And Cloud Computing For Future Internet. International Research Journal of Engineering and Technology (IRJET). 6(5). 2019. pp.1098-1102.

- [6] AbdelRahman H. Hussein. Internet of Things (IOT): Research Challenges and Future Applications. (IJACSA) International Journal of Advanced Computer Science and Applications. 10(6). 2019. pp77-82.
- [7] Chamandeep Kaur. The Cloud Computing and Internet of Things (IoT). International Journal of Scientific Research in Science, Engineering and Technology. 7(1). 2020. pp.19-22. DOI: https://doi.org/10.32628/IJSRSET196657
- [8] Cohen D and Crabtree B. RWJF Qualitative Research Guidelines Project | Semi-Structured Interviews | Semi-Structured Interviews. Qualres.org 2008.
- [9] D. Ezhilarasi, N. Senthamilarasi Bharathi and R.B. Sangavi. Child Safety Monitoring System Based on IoT. Journal of Physics: Conference Series. 1362(1). 2019. pp.1742-6596.
- [10] Dr. J. Jegathesh Amalraj, J. Jereena John and S. Banumathi. IOT Sensors And Applications: A Survey. International Journal Of Scientific & Technology Research. 8(8). 2019. pp.998-1003.
- [11] Dr. R. Nagaraja and P. Elamathi. Smart Children Safety Using Wearable Device A Review. International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering. 8(11). 2019. pp.2278-8875.
- [12] Dr. R. Rajesh and Sureshkumar P.H. The Analysis of Different Types of IoT Sensors and security trend as Quantum chip for Smart City Management. IOSR Journal of Business and Management (IOSR-JBM). 20(1). 2018. pp.55-60. DOI: <a href="https://doi.org/10.9790/487X-2001045560">https://doi.org/10.9790/487X-2001045560</a>
- [13] Dissertation.laerd.com. Quota Sampling | Lærd Dissertation. 2021.
- [14] E Kusuma Kumari, K N H Srinivas, M Nandini Priyanka, S Murugan and T D S Sarveswararao. Smart IOT Device for Child Safety and Tracking. International Journal of Innovative Technology and Exploring Engineering (IJITEE). 8(8). 2019. pp.2278-3075.
- [15] Fadi Muheidat, Lo'ai Tawalbeh, Mais Tawalbeh and Muhannad Quwaider. IoT Privacy and Security: Challenges and Solutions. Applied Sciences. 10(12). 2020. p.4102. DOI: <a href="https://doi.org/10.3390/app10124102">https://doi.org/10.3390/app10124102</a>
- [16] Hanan M. Shukur, Lailan M. Haji, Mohammad A. M. Sadeeq, Omar M. Ahmed, Rizgar R. Zebari and Shakir M. Abas. Journal of Applied Science and Technology Trends. 1(2). (2019). pp40-47.

- [17] Jin-kuang Wang, Jie-lun Li, Jing Zhang, Min-feng Yao and Shi-Xing Li. Research and Application of Internet of Things. Journal of Machine to Machine Communications. 1(3). 2015. pp.215-228. DOI: <a href="https://doi.org/10.13052/jmmc2246-137X.132">https://doi.org/10.13052/jmmc2246-137X.132</a>
- [18] Mohsin Nazir. Cloud Computing: Overview & Current Research Challenges. IOSR Journal of Computer Engineering. 8(1). 2012. pp.14-22.
- [19] Nishit Raghuwanshi Rudra. 8 Best GPS Trackers For Kids In 2020 To Ensure They Are Safe. 2020.
- [20] Libguides.wits.ac.za. 2020. Libguides: Research Support: Research Methodology. Atlantis Highlights in Computer Sciences, volume 4 471
- [21] Paul J. Lavrakas. Encyclopedia of Survey Research Methods. 2008. DOI: httpss://doi.org/10.4135/9781412963947.n424
- [22] QuestionPro. Online Surveys: Definition, Characteristics, Examples, Advantages And Disadvantages | Questionpro. 2020.
- [23] Robert J. Shapiro, Kevin A. Hassett. The Economic Benefits Of Reducing Violent Crime Center For American Progress. 2012.
- [24] Saul McLeod. Questionnaire: Definition, Examples, Design and Types. 2018.
- [25] Tom Pollock. The Difference Between Structured, Unstructured & Semi-Structured Interviews Oliver Parks Consulting LLC Technology Sector Recruitment Experts. 2020.
- [26] United Nations: Office on Drugs and Crime. Crime Prevention. 2020.
- [27] K. Yu, Z. Guo, Y. Shen, W. Wang, J. C. Lin, T. Sato, "Secure Artificial Intelligence of Things for Implicit Group Recommendations", IEEE Internet of Things Journal, 2021, doi: 10.1109/JIOT.2021.3079574.
- [28] H. Li, K. Yu, B. Liu, C. Feng, Z. Qin and G. Srivastava, "An Efficient Ciphertext-Policy Weighted Attribute-Based Encryption for the Internet of Health Things," IEEE Journal of Biomedical and Health Informatics, 2021, doi: 10.1109/JBHI.2021.3075995.
- [29] L. Tan, K. Yu, F. Ming, X. Cheng, G. Srivastava, "Secure and Resilient Artificial Intelligence of Things: a HoneyNet Approach for Threat Detection and Situational Awareness", IEEE Consumer Electronics Magazine, 2021, doi: 10.1109/MCE.2021.3081874.


- [30] B D, Parameshachari & Rachana, C. (2017). CLOUD COMPUTING: A RESEARCH PERSPECTIVE ON THE SECURITY ISSUES.
- [31] Rachana, C.R., Banu, R., Ahammed, G.A. and Parameshachari, B.D., 2017, August. Cloud Computing–A Unified Approach for Surveillance Issues. In IOP Conference Series: Materials Science and Engineering (Vol. 225, No. 1, p. 012073). IOP Publishing.
- [32] Y. Sun, J. Liu, K. Yu, M. Alazab, K. Lin, "PMRSS: Privacy-preserving Medical Record Searching Scheme for Intelligent Diagnosis in IoT Healthcare", IEEE Transactions on Industrial Informatics, doi: 10.1109/TII.2021.3070544.
- [33] Fathima, N., Ahammed, A., Banu, R., Parameshachari, B.D. and Naik, N.M., 2017, December. Optimized neighbor discovery in Internet of Things (IoT). In 2017 International Conference on Electrical, Electronics, Communication, Computer, and Optimization Techniques (ICEECCOT) (pp. 1-5). IEEE.
- [34] Seyhan, K., Nguyen, T.N., Akleylek, S., Cengiz, K. and Islam, S.H., 2021. Bi-GISIS KE: Modified key exchange protocol with reusable keys for IoT security. Journal of Information Security and Applications, 58, p.102788.
- [35] Nguyen, T.N., Zeadally, S. and Vuduthala, A., 2021. Cyber-physical cloud manufacturing systems with digital-twins. IEEE Internet Computing.
- [36] Hu, L., Nguyen, N.T., Tao, W., Leu, M.C., Liu, X.F., Shahriar, M.R. and Al Sunny, S.N., 2018. Modeling of cloud-based digital twins for smart manufacturing with MT connect. Procedia manufacturing, 26, pp.1193-1203.
- [37] Arun, M., Baraneetharan, E., Kanchana, A. and Prabu, S., 2020. Detection and monitoring of the asymptotic COVID-19 patients using IoT devices and sensors. International Journal of Pervasive Computing and Communications.
- [38] Nagaraj, V., Sumithira, T.R. and Prabu, S., 2016. Development of Communication Technologies and Networks for Smart Grid. International Journal of MC Square Scientific Research, 8(1), pp.81-92
- 05) e-ISSN: 2582-5208 International Research Journal of Modernization in Engineering Technology and Science (Peer-Reviewed, Open Access, Fully Refereed International Journal) Volume:04/Issue:04/April-2022 Impact Factor- 6.752

- [1] H. Times, 30 August 2019. [Online]. Available: https://www.hindustantimes.com/india-news/with-60- 000-children-going-missing-in-india-every-year-social-media-has-propelled-child-lifting-fear/storyAvL4yvASeN4fgXQPoAkBKP.html. [Accessed August 2021].
- [2] N. Projects, August 2012. [Online]. Available: https://nevonprojects.com/child-monitoring-systemapp/. [Accessed August 2021].
- [3]Ijesc,2019.[Online].Available:https://ijesc.org/upload/4ae0fee98320daeb099ea96feea47ab0. Child%20Monitoring%20System%20 (1).pdf. [Accessed November 2021].
- [4]Citeseerx,June2009.[Online].Available:https://citeseerx.ist.psu.edu/viewdoc/download?doi=1 0.1.1.332.9054&rep=rep1&type=pdf. [Accessed October 2021].
- [5] IRJET, June 2020. [Online]. Available: https://www.irjet.net/archives/V7/i6/IRJET-V7I6756.pdf. [Accessed August 2021].
- [6]R.Gate,January2019.[Online].Available:https://www.researchgate.net/publication/337309815 \_Child\_Safety\_Monitoring\_System\_Based\_on\_Io T. [Accessed September 2021].

#### 2.3 PROBLEM STATEMENT DEFINITION

Further families are now spending time on work and social duties, hence down from their children. This causes increased enterprises about their safety and whereabouts and has made keeping a track of their conditioning relatively grueling. Crimes against children are adding Year after Year. According to a study, roughly,000 children go missing in India every time

- (1). There's an supposition that every 10 twinkles, a child goes missing. Mumbai and Delhi have the loftiest rate when compared to other metro metropolises. With the lack of vacuity of affordable child covering systems, it's hard to cover the whereabouts of Children
- ( 2). The safety of children is veritably critical since children can not cover themselves. A evanescent lack of maternal supervision should be combated with an applicable IT result in environment. thus, the proposed system must warn the parents when the child walks too far down and/ or outside the "circle of safety" when they're down. In case of an exigency or a situation of fear, the child must be suitable to communicate with their parents. Still, the aid of technology can increase effectiveness and drop the time necessary to detect and reach the child, If in case the child does go missing or has a fall.

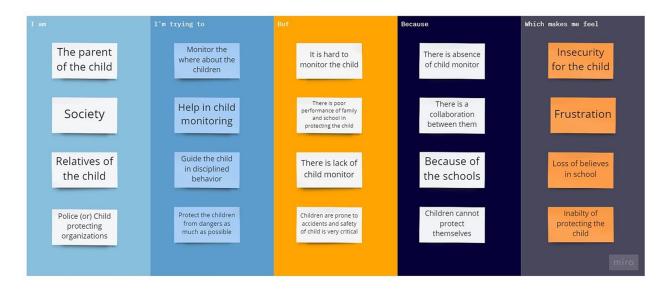

#### **CHAPTER 3**

#### 3. IDEATION & PROPOSED SOLUTION

#### **IDEATION:**

Ideation is the creative process of generating new ideas, which can be accomplished through a variety of ideation techniques, such as brainstorming and prototyping. If done right, ideation is what helps founders and executives determine the right problem to solve and how to solve it.

Ideation is the process where you generate ideas and solutions through sessions such as Sketching, Prototyping, Brainstorming, Brainwriting, Worst Possible Idea, and a wealth of other ideation techniques. Ideation is also the third stage in the Design Thinking process


#### PROPOSED SOLUTION:

Proposed Solution means the technical solution to be provided by the Implementation agency in response to the requirements and the objectives of the Project.

Proposed Solution means the combination of software, hardware, other products or equipment, and any and all services (including any installation, implementation, training, maintenance and support services) necessary to implement the solution described by Vendor in its Proposal.

#### 3.1 EMPATHY MAP CANVAS

An empathy map helps to map what a design team knows about the potential audience. This tool helps to understand the reason behind some actions a user takes deeply. This tool helps build Empathy towards users and helps design teams shift focus from the product to the users who are going to use the product.

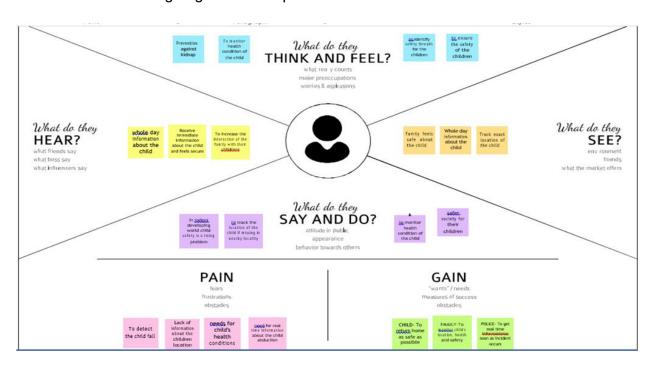


#### 3.2 IDEATION & BRAINSTORMING

Brainstorming is a method design teams use to generate ideas to solve clearlydefined design problems. Brainstorming is a method of generating ideas and sharing knowledge to solve a particular commercial or technical problem, in which participants are encouraged to think without interruption. Brainstorming is a group activity where each participant shares their ideas as soon as they come to mind. At the conclusion of the session, ideas are categorised and ranked for follow-on action.

When planning a brainstorming session it is important to define clearly the topicto be addressed. A topicwhich is too specific can constrict thinking, while an ill-definedtopic will not

generate enough directly applicable ideas. The composition of the brainstorming group is important too. It should include people linked directly with the subjects well as those who can contribute novel and unexpected ideas. It can comprise staff from insideor outside the organisation.

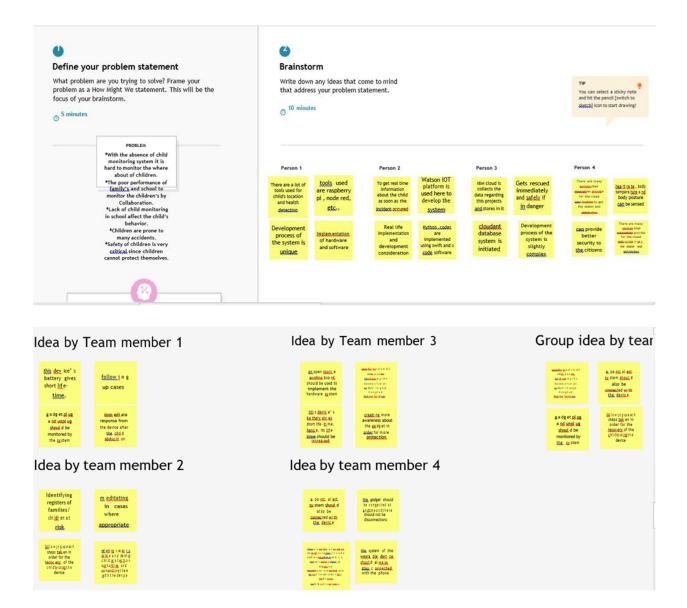

#### 3.3 PROPOSED SOLUTION

Proposed Solution means the technical solution to be provided by the Implementation agency in responseto the requirements and the objectives of the Project.

S.No	Parameter	Description		
1.	Problem Statement (Problem	Absence of childmonitoring, child's protection,		
	to besolved)	child's safety		
2.	Idea/ Solution description	Panic alert systemshould also be connected		
		withthe device; Gadget plug and unplug should be		
		monitored		
3.	Novelty / Uniqueness	Installation of small solarpanels to chargethe		
		battery of the smart gadget to gain minimum		
		battery backup		
4.	Social Impact / Customer	Safer society for the children; family feels secure		
	Satisfaction	for the child.		
5.	Business Model (Revenue	Direct Sales		
	Model)	There are two types of direct sales: inside sales, in		
		which someone calls in to place an order or sales		
		agents calling prospects; and outside sales, which is		
		a face to face salestransaction.		
		Advantages: Direct sales models work great with		
		relationship salescycles, enterprise sales cycles,or		
		complex sales cycles that entail multiple buyers		
		andinfluencers.		
		<u>Disadvantages:</u> The direct sales model often		
		requires hiring a sales team of some sort, which		
		means that it isn't optimal for small ticket price items.		
		If your offering is priced belowthe \$1,000-		
		,		

	\$2,000 range, you'll have trouble building a scalable company.
6.	Scalability, connectivity, artificial intelligence, security, dynamic nature, endpoint management, integration, analyzing, and compact nature of devices.

#### 3.4 PROBLEM SOLUTION FIT

Problem-solution fit is a term used to describe the point validating that the base problem resulting in a business idea really exists and the proposed solution actually solves that problem. Validate that the problem exists: When you validate your problem hypothesis using real-world data and feedback.

1.CUSTOMER SEGMENT(S)	6.CUSTOMER LIMITATIONS	5.AVAILABLE		
With the absence of	Lack of child monitoring in	SOLUTION		
child monitoring system, it is	school affects the child's	Development process		
hard to monitor the where about	behavior. Children are proneto	of the system is		
thechild. Poor performance of	many accidents.	unique. Real life		
the school to monitor the child by		implementation and		
collaboration's.		development		
		consideration.		

#### 2. PROBLEM/ PAINS

A panic alert system should be implemented in the wearable device. And need the real time information of the child abduction.

#### 9.PROBLEM ROOT / CAUSE

In today's developing world child safety is a rising problem. Since children cannot protect themselves, they are mostly involved in abductions.

#### **7.BEHAVIOR**

Frustration,
Emotional instability,
stress reactions,
anxiety, trauma and
other psychological
symptoms are
observed commonly
after child abduction
and other traumatic
experiences.

#### **3.TRIGGERS TO ACT**

These riskscan combine witheach other to complex events, the analysis of which requires a systematic approach that takes into account not only the systems involved and their independencies, but also the combination of events and the variouspropagation processes that occur in such systems.

#### 4. EMOTIONS Before / After

Before there was Insecurity for child and inability of protecting the child and now there is safety for the child and they can be detected at any time as there are into the geofence aroundthem.

#### 1. YOUR SOLUTION

- a. Awarenessamong theconsumers
- b. Education about
  the system
  implementation
  Updation of the
  system4.Prediction

## 8.CHANNNELS OF BEHAVIOR Online

Twitter is indeed a social sensor with different sensitivity levels to detect the childs safetyand depending on the event circumstances, a diverse pattern of social media behavior shouldbe Expected.

#### Offline

Awareness in society about child safety and their

protection and event
circumstances of
media behavior should
be expected.

#### **CHAPTER 4**

#### 4. REQUIREMENT ANALYSIS

#### **4.1 FUNCTIONAL REQUIREMENT**

Following are the functional requirements of the proposed solution

FR	Functional Requirement	Sub Requirement (Story / Sub-Task)
No.	(Epic)	
FR-1	Software interface	This includes embedded application that will used in supporting the various functions of the system Eg: GPS,
		Web Serverand Database
FR-2	User interface	It shouldbe the connector between the varioussystems
		or between other part or unit of the system
FR-3	Authentication	Thesystem sends an approval request after the user enters personal information
FR-4		These requirements include interaction logic between software and user, screen layouts, buttons, functions on everyscreen, hardware interfaces (here a team describes what devices the software is created for), and other relevant particularities.

FR-5	Reporting	Reporting Requirements means any applicable laws, rules,			
		regulations, instruments, orders or directives and any			
		requirements of a regulatory or supervisory organization			
		that mandate reporting and/or retention of safety and			
		similar information			

#### **4.2 NON-FUNCTIONAL REQUIREMENTS**

Following are the non-functional requirements of the proposed solution.

FR No.	Non-Functional Requirement	Description	
NFR-1	Usability	Usability is a non-functional requirement, because in its	
		essence it doesn't specifyparts of the system functionality,	
		only how that functionality is to be perceived by the user,	
		for instance how easy it must be to learnand how efficient	
		it must be for carrying out user tasks.	

NFR-2	Security	Security is a non-functional requirement assuring all data inside the systemor its part will be protected against malware attacks or unauthorized access.	
NFR-3	Reliability	Reliability is the extent to which the software systemconsistently performs the specified functions without failure. ELICITATION: Reliability requirements address the user concernfor the system's immunity to failure	
NFR-4	Performance	The website's load time shouldnot be more than one second for users.	
NFR-5	Availability	Employers canpost jobs on the website throughout the week at any time during the day.	
NFR-6	Scalability	Scalability is the ability of the application to handle an increase in workload without performance degradion, or its ability to quickly enlarge.	


#### **CHAPTER 5**

#### 5. PROJECT DESIGN

#### **5.1 DATA FLOW DIAGRAMS**

A data flow diagram (DFD) is a graphical or visual representation using a standardized set of symbols and notations to describe a business's operations through data movement. They are often elements of a formal methodology such as Structured Systems Analysis and Design Method (SSADM). Superficially, DFDs can resemble flow charts or Unified Modeling Language (UML), but they are not meant to represent details of software logic.

DFDs make it easy to depict the business requirements of applications by representing the sequence of process steps and flow of information using a graphical representation or visual representation rather than a textual description. When used through an entire development process, they first document the results of business analysis. Then, they refine the representation to show how information moves through, and is changed by, application flows. Both automated and manual processes are represented.

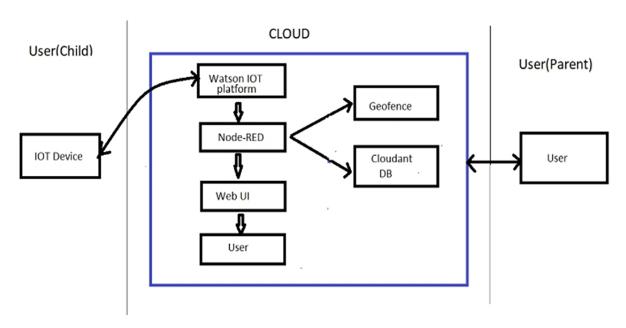


#### **5.2 SOLUTION & TECHNICAL ARCHITECTURE**

#### I) SOLUTION

An IoT architecture is a mix of hardware and software components that interact together to make up a smart cyber-digital system. Interoperating with one another, these components make up a base for an IoT solution to be built upon.

Solution architecture provides the ground for software development projects by tailoring IT solutions to specific business needs and defining their functional requirements and stages of implementation. It is comprised of many sub processes that draw guidance from various enterprise architecture viewpoint

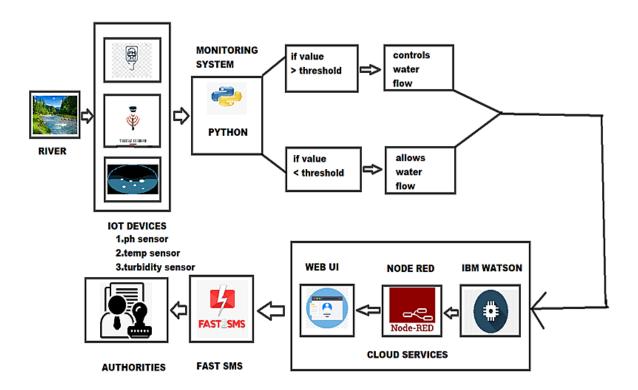


#### II) TECHNICAL ARCHITECTURE

Technical architect roles typically involve: Designing the structure of technology systems. Managing the implementation of programs. Coordinating with the software development team to ensure the system runs smoothly.

Technology architecture provides a more concrete view of the way in which application components will be realized and deployed. It enables the migration problems that can arise between the different steps of the IS evolution path to be studied earlier.

#### **Technology stack Architecture**

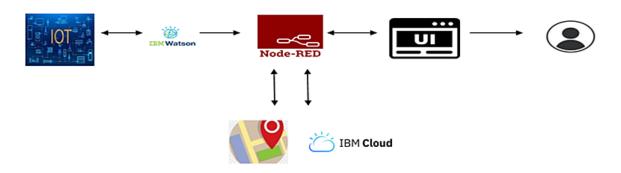

#### **5.3 USER STORIES**

A user story is an informal, general explanation of a softwarefeature written fromtheperspective of the end user. Its purpose is to articulate how a software feature will provide value to the customer. It's tempting to think that user stories are, simply put, software system requirements. But they're not.

A key component of agile software development is putting people first, and auser story puts end users at the center of the conversation. These stories use non-technical language to provide contextfor the development team and their efforts. Afterreading a user story, the team knows why they are building, what they're building, and what value it creates. User stories one of the core components of an agile program. They

help providea user-focused frameworkfor daily work — which drives collaboration, creativity, and a betterproduct overall.

UserType	Functional	User	User Story / Task	Acceptance criteria	Priority	Releas
	Requiremen	Story				е
	t (Epic)	Numbe				
		r				
Customer	Registration	USN-1	As a user, I can	I canaccess my	High	
(Mobileuser &			register for the	account		
Web			application by	/dashboard		
users)			entering my email,			
			password, and			
			confirmingmy			
			password.			
		USN-2	As a user, I will	I can receive	High	
			receive	confirmationem		
			confirmation	ail &		
			emailonce I	clickconfirm		
			have registered			
			myself			
		USN-3	As a user, I can	I canregister &	High	
			register for the	accessthedashbo		
			applicationthrou	ard with		
			gh Apple	Appleaccount		
			account and	Login		
			twitter	andtwitter		
				accountlogin		
	Login	USN-4	As a user, I can		High	
			register for the			
			application by			
			entering the			
			user ID &			
			entering the			

		Password	
Customer	Login	As I enter I can I can login only with Medium	
CareExecuti		view the working of my provided	
ve		the application and credentials	
		scan for any	
		glitches and	
		monitor the	
		operation and	
		check if all the	
		usersare authorized	
Administrator	Login	Maintaining and I can login only with High	
		makingsure the my provided	
		database containing credentials	
		the location	
		aresecure and	
		accurate andalso	
		updated constantly	

#### **CHAPTER 6**

#### 6. PROJECT PLANNING & SCHEDULING

#### **6.1 SPRINT PLANNING & ESTIMATION**

- 1) Prerequisites.
- IBM Cloud services
- Software
- 2) Project Objectives.
- Abstract
- Brainstorming
- 3) Create and Configure IBM Cloud Services.
- Create IBM Watson lot Platform And Device
- Create Node- Red Service
- Create A Database In Cloudant DB
- 4) Develop the Python Script.
- Develop A Python Script
- 5) Develop A Web Application Using Node-RED Service.
- Develop The Web Application Using Node-RED
- 6) Ideation Phase.
- Literature Survey on the Selected Project & Information Gathering
- Prepare Empathy Map
- Ideation
- 7) Project Design Phase -1
- Proposed Solution Prepare Solution Fit
- Solution Architecture
- 8) Project Design Phase -2
- Customer journey
- Functional Requirement

- Data Flow Diagram
- Technology Architecture
- 9) Project planning Phase.
- Prepare Milestones & Activity List
- Sprint Delivery Plan
- 10) Project Development Phase.
- Project Development-Delivery Of Sprint-1
- Project Development-Delivery Of Sprint-2
- Project Development-Delivery Of Sprint-3
- Project Development-Delivery Of Sprint-4

Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed (as on PlannedEnd Date)	Sprint Release Date (Actual)
Sprint-1	21	6 Days	24 Oct 2022	29 Oct 2022	21	29 Oct 2022
Sprint-2	17	6 Days	31 Oct 2022	05 Nov 2022	17	05 Nov 2022
Sprint-3	22	6 Days	07 Nov 2022	12 Nov 2022	22	12 Nov 2022
Sprint-4	30	6 Days	14 Nov 2022	19 Nov 2022	30	19 Nov 2022

#### **6.2 SPRINT DELIVERY SCHEDULE**

Spr	Function	User	User Story/ Task	Stor	Priority	Tea
int	al	Story		у		m
	Require	Number		Poin		Ме
	ment			ts		mb
	(Epic)					ers

Spr	Create	USN-1	As a user I need to enroll	3	HIGH	Theo
int-	and		thecloud registration			Thrinish
1	Configure					aMary
	IBMCloud					
	Services					
Spr		USN-2	As a user, I will createIBM	2	MEDIUM	Theo
int-			cloud account.			Thrinish
1						aMary
Spr		USN-3	Aftercreating cloud account	5	HIGH	Anitha
int-			launch IBM			
1			Watson IOTplatform by			
			accessing cloud			
			account			
Spr		USN-4	Create the node in IBM	7	HIGH	MalarVizh
int-			Watsonplatform			İ
1						
Spr		USN-5	After Creating node get	1	LOW	Nageswar
int-			deviceType and id			İ
1						
Spr		USN-6	Simulate the node created	3	MEDIUM	Nageswar
int-						İ
1						
Spr	Create and	USN-7	As a user ,I can	5	HIGH	The
int-	accessNode-		createNode-red by			О
2	Red		appdeployment			Thri
						nis
						ha
						Mary
Spr		USN-8	Connect IBM Watson	2	LOW	Malarvizhi
int-			withnode red through API			
2			key			

Spr	USN-9	Design the project	flow using	7	HIGH	Theo
int-		Node-Red				Thrinish
2						aMary
Spr	USN-10	Checkfor	the	3	MEDIUM	Anitha
int-		properconnections	and			
2		theoutput in the r	node			
		red application				


Sprin	Functional	User	User Story/ Task	StoryPoint	Priority	Team
t	Requiremen	Story		S		Member
	t(Epic)	Numbe				S
		r				
Sprin	Create A	USN-11	Launch the	4	HIGH	Nageswari
t-3	Databas		Cloudant DB and			
	e in		Createdatabase to			
	Cloudant		store the location			
	DB		data			
Sprin	Develop the	USN-12	Install the python	2	LOW	Theo
t-3	Python script		software			Thrinish
						a
						Mary
Sprin		USN-13	Develop the	6	HIGH	Malarvizhi
t-3			python scripts to			
			publish details to			
			IBM IoT Platform			
Sprin		USN-14	Integrate the	2	LOW	Anitha
t-3			device id,			
			authentication			
			token in python			
			script			

Sprin		USN-15	Develop the	8	HIGH	Theo
t-3			python code for			Thrinisha
			publishing the			Mary
			location (latitude			
			& longitude) to			
			IBM IoT Platform			
Sprin	Create the Web	USN-16	Develop the Web	5	HIGH	Nageswari
t-4	application		application using			
	usingNode Red		Node red			
Sprin		USN-17	Connect to the	2	MEDIUM	Malarvizhi
t-4			IBMIoT Platform			
			and get			
			thelocation and			
			Store the datain			
			the Cloudant			
Sprin		USN-18	Create the	8	HIGH	Theo
t-4			geofence and			Thrinisha
			Google map			Mary
			for location			
			identification			
Sprin		USN-19	Integrate the	11	HIGH	Theo
t-4			geofence and			Thrinisha
			Google map to			Mary
			check if the			
			child is inside			
			or outside			
			thegeofence			
Sprin		USN-20	Send the	4	HIGH	Anitha
t-4			notifications if the			
			childis outside			
			thegeofence			


### **6.3 REPORTS FROM JIRA**

### • SPRINT 1


# **BURNDOWN CHART:**

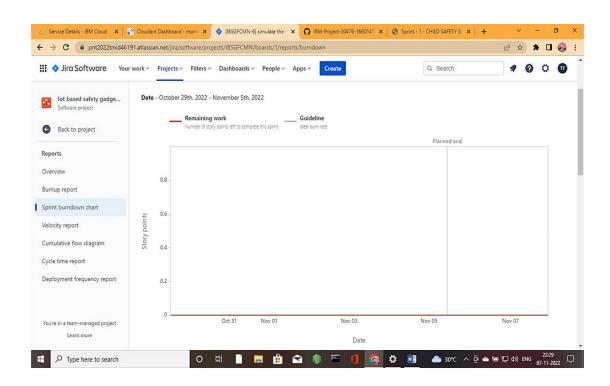

### **ROADMAP:**

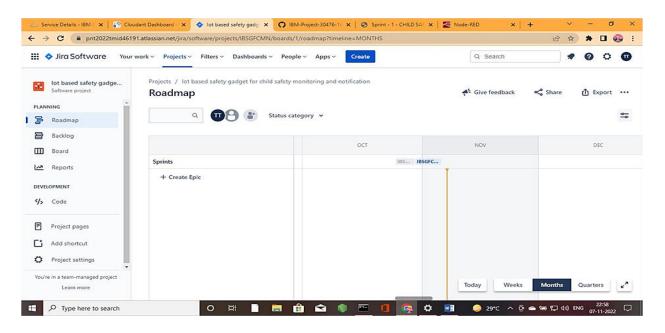


# Velocity map:

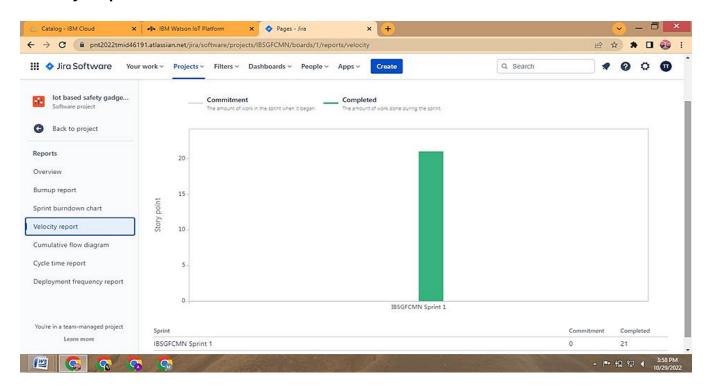


### SPRINT 2


# **BURNDOWN CHART:**

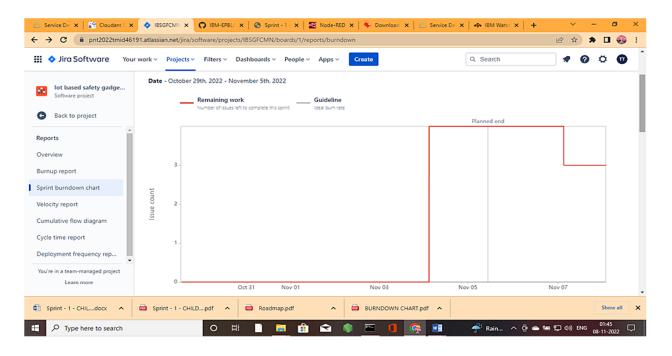

### ROADMAP:

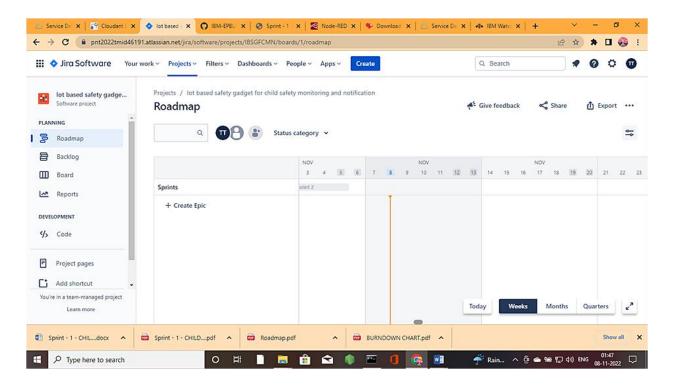


### **VELOCITY MAP**

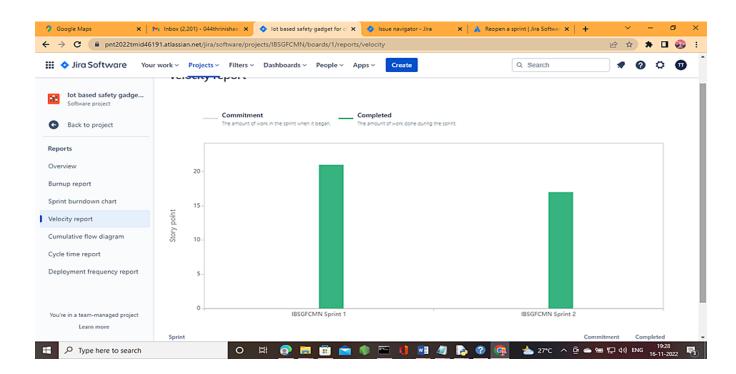


### SPRINT 3


#### **BURNDOWN CHART:**

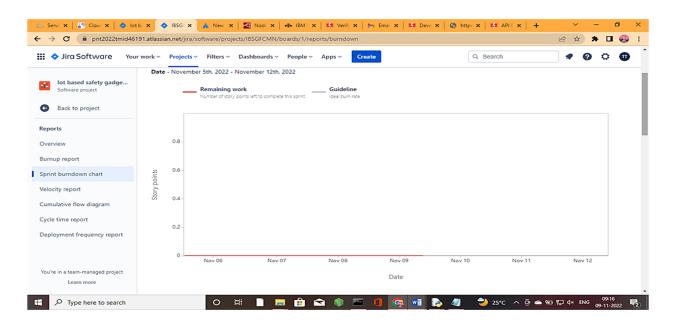

### **ROADMAP:**

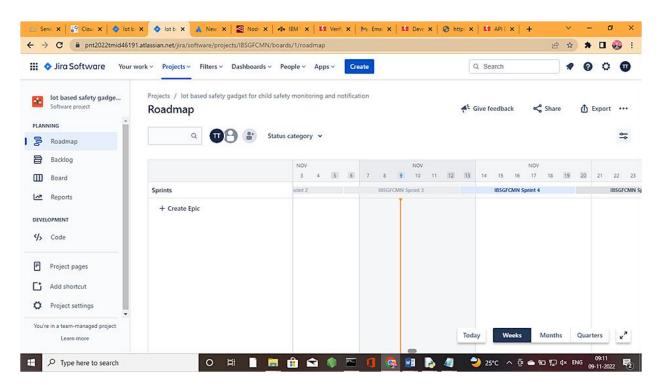


# **VELOCITY MAP:**

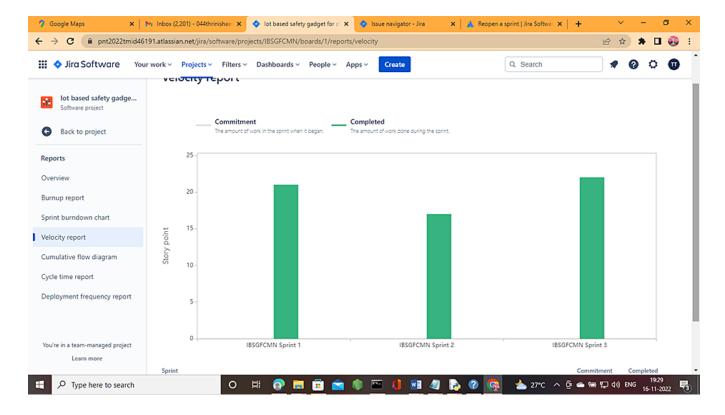


### SPRINT 4


### **BURNDOWN CHART:**

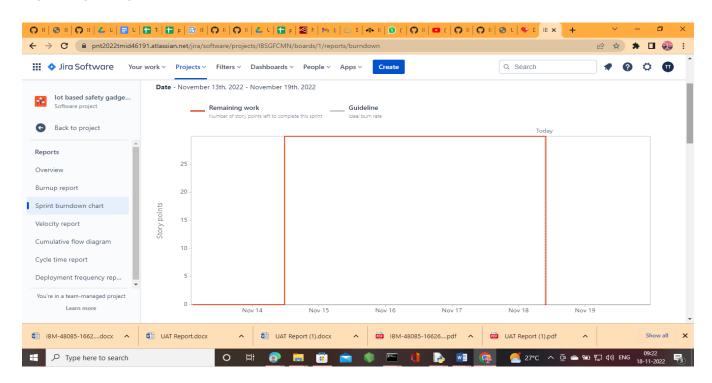

# **ROADMAP:**

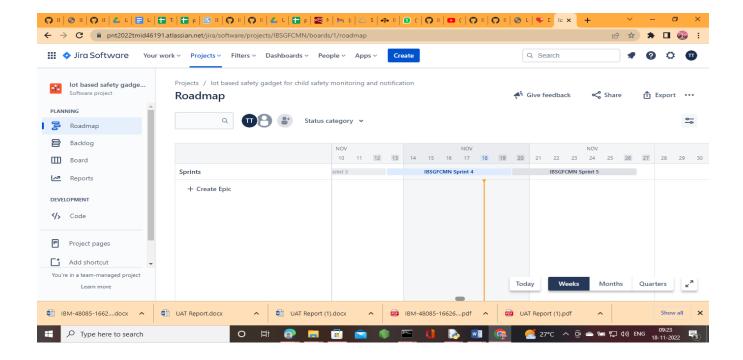

# **VELOCITY MAP:**

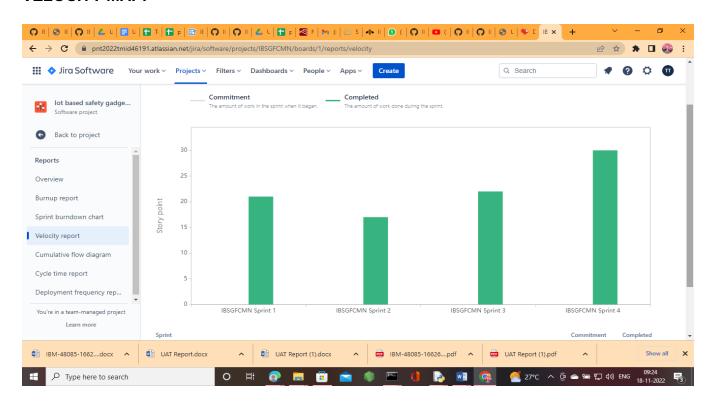

**CHAPTER 7** 

### 7. CODING & SOLUTIONING


### 7.1 FEATURE 1

### IBM WATSON IOT PLATFORM

The very first processin this projectsection is to develop the IBM IoT Platform. This IoT platform is the core formula for all the conection process. As the only way of connecting several applications is the basic work of the cloud platform. The process of signing in to the cloud process is the large process which carries verification segments too. After creating the Cloud Profile, lets move to device creation part.

### **Device Creation:**


Now the next step is to create a device, we have created a device with following details

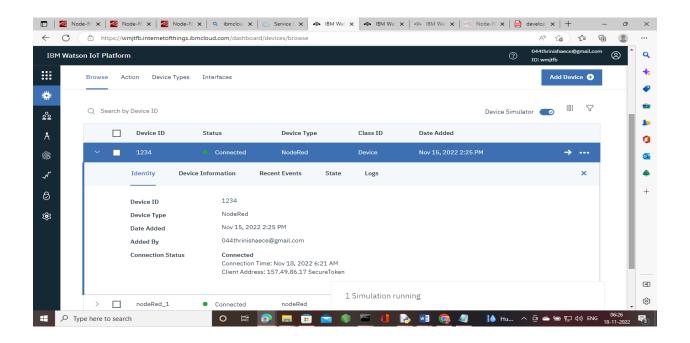

After registering to the IBM IoT Platform and created the device, now we move onto the Node-Red Service, in this here wecan create the Web user interface and theWebApplication by designing the circuit. OurNode-Red Circuitdesigning are as follows.

The first step is to install the IBM IOT block from the node-red service and wehave set four functions namely, latitude, longitude, location these four

functionsprocessess bin value with correspondinglocation of the child, whenever the child getsout of the geo-fence, an alert message is sent to the guardian or parent .Location of the child can be seen in the map.

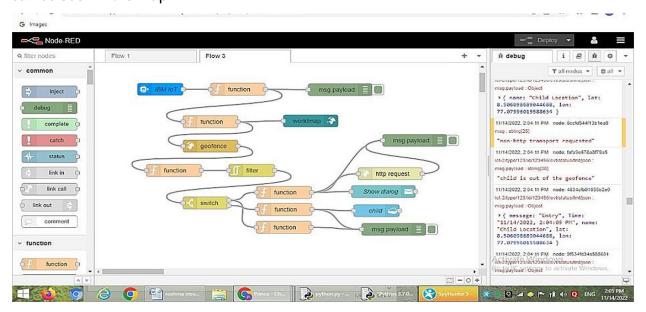


After the successful simulation of the Node-RedService, User Interface is created. OurWebUI includes a dashboard which has the location of the particular child and a alert message to be sent.

### **7.2 FEATURE 2**

# **PYTHON CODE**

Our Python Code is very Simple and easy to understand. The programs carriesour device detallisand therequirements of the project are kept defined. All conditions are made properly and the output is done successfully

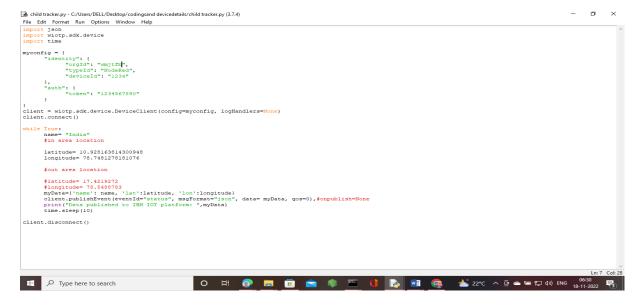

**CHAPTER 8** 

### 8. TESTING

### **8.1 TEST CASES**

As the code is made to run, the system waits to connect with IoT platform.On account of coonection with the IBM Watson Platform, the code displays the output with relevant details. The output is shown in Cloud platform, the links to Node-Red also to the UI section. Finallywhen the Application is operated, the output is also displayed in itThe output of our Code is shown below,

### **8.2 USER ACCEPTANCE TESTING**

# **Purpose of Document**

The purpose of this document is to briefly explain the test coverage and open issues of the IoT-Based Safety Gadget for Child Safety Monitoring and Notification project at the time of the release to User Acceptance Testing (UAT).

# **Defect Analysis**

This report shows the number of resolved or closed bugs at each severity level, and how they were resolved

Resolution	Severity 1	Severity 2	Severity 3	Severity 4	Subtotal
By Design	12	5	3	4	24
Duplicate	2	0	3	0	5
External	3	5	0	2	10
Fixed	10	1	5	15	31
Not Reproduced	0	0	2	0	2
Skipped	0	0	2	1	3
Won't Fix	0	4	3	2	9
Totals	27	15	18	24	84

# **Test Case Analysis**

This report showsthe number of test casesthat have passed, failed, and untested

Section	Total	NotTest	Fai	Pa
	Cases	ed	I	SS
Print Engine	8	0	0	8

Client Application	50	0	0	50
Security	3	0	0	3
Outsource Shipping	4	0	0	4
Exception Reporting	10	0	0	10
Final Report Output	5	0	0	5
Version Control	3	0	0	3


test case excel link: https://ldrv.ms/x/s!AhC-4VXBBNjHgTFwLMVklzf-hjEA

# **CHAPTER 9**

# **RESULTS**

# 9.1 PERFORMANCE METRICS

The performance and the working of the code is ver quick and the results appears in quick succession. Our code is linked with the most used IBM Watson IoT Platform which works with much perfection. This cloud platform very secure to use and configure easily. As the code is simulated withinsecondsthe result appears. We have done lot of works using this IoT platform which is very simple and good user friendly platform. Below we display our connected IoT platform which delivers the results as the code is run.

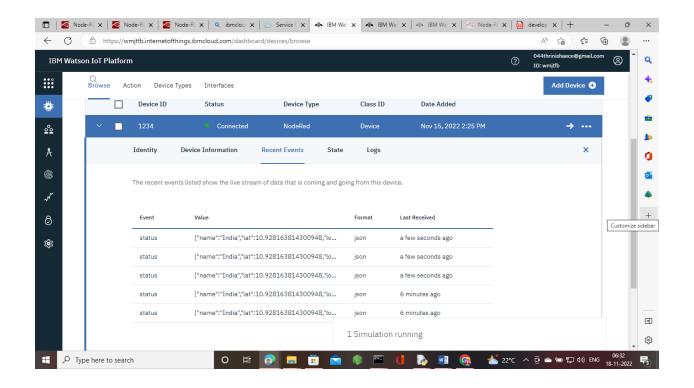

### **CHAPTER 10**

# 10. ADVANTAGES & DISADVANTAGES

### **ADVANTAGES:**

# Easy Availability Affordability

Gone are the days when buying a GPS enabled Wearable Device for kids was considered a luxury. Today, however, the scenario is different. There are plenty of options readily available. It is easy to buy a smart watch for kids of your choice online. What's more, these magnificent tech gadgets don't burn a big hole in your pockets and make up for an affordable buy. Now a smart watch is just a click away! Besides,these smart-watches lend a style statement to yourfashionconscious kids.

# **Tracking Made Easy**

Fueled by IOT, the GPS enabled Wearable Device act as a saviour for parents who are always clouded with worries about their kids. Tracking a child was never this easy. These Wearable Device allow parents to tracktheir children in crowded/public places or when

they are out of sight say at school, picnic or an outing. Parents can use these smart-watches to track the location of their lost kids.

# • Smart watch is Technology in Disguise

No matter how tech advanced the smart watches are, they hardly look like one. Most manufacturers have worked hard to mold their tech wonders in a time piece that looks everything but a tech piece! Their childish designs and bright colour combination is perfect to disguise them. This is precisely why most peoplecan hardlyspot the difference between a smart watch and an ordinary watch. Good for kids whouse them, as their adorabledesigns keep these watches safe from the prying eyes.

### i. Watches Over Your Kids

GPS tracker watches are a boon for parents as they help in watching over your kids when either they are away or you are away from them. These devices:

- 1. Tracks kids when they reach schoolor arrive home from school.
- 2. Track kids when they are untraceable in a crowdedspace.
- 3. Track kids when they are away from home and out of your sight.

# **Guarantees Peace of Mind to Parents**

Parents, whether at home or office, are always worried about the safety of their kids. The fear of losing your child to avoidable circumstances is the concern area for all mommies and daddies. On the other hand, a smart watch equipped kid is always traceable and reachable in case of contingencies and emergencies. This in fact, offers great solace for parents, who are relieved at the thoughtof maintaining an uninterrupted connectivity with their children, anytime, anywhere. Enough toof course, guaranteethe much-needed peace ofmind

# **DISADVANTAGES:**

Daily batterycharging may be difficult to remember for the wearabletrackers. Frequent monitoring of child location notification is difficult. Childrenmay loss the gadget.

### **CHAPTER 11**

### 11. CONCLUSION

The perpetration of an exertion shamus system using IOT safeguards children and it can also be effectively used for women, and senior people to cover them and guard them in the fastest way which is possible automatically. This system substantially focuses on a wireless system that will warn and communicates with a secure medium and can perform the real-time monitoring of particular zone and descry safety with effective delicacy. This idea can be enforced in different areas of security around academy zones, institutions, and shopping zones where facing dangerous situations happens because of attacks. This system would be largely sensitive and easy to handle. Its quick action response will give better deliverance to every individual stoner.

The word unborn resembles the word Children. AsDr.A.P.J Abdul Kalam words "youths are the unborn pillars of one's nation", moment's children are hereafter's youths, and conserving their dreams and life for a better future is necessary. thus, every parent should take care of their children, without letting them fall into the dark world of abuse, which entirely ruins them physically, mentally, and emotionally destroying our future. Hence, considering the significance of our future, our design makes it easy for parents to track their children and visually cover them on regular base, which makes them ensures the safety of their children and reduces the rate of incidents of child abuse.

Throughout the exploration, it's easily explained the IoT conception, child safety issues, and the need of using child security systems. Some former studies have been included for designing the IoT- grounded child security smart band. It assists parents to cover their children ever.

### **CHAPTER 12**

# 12. FUTURE SCOPE

In our system, we automatically cover the child in real-time using the Internet of effects, with the help of GPS, GSM, and Raspberry Pi. This system requires network connectivity, satellite communication, and high-speed data connection when we use web cameras and GPS to the lively examiner. It's delicate to cover when there occurs any interference to satellite communication or any network issue. There also occurs time detention in videotape streaming through the garçon. Hence in the future, these issues can be overcome by using the Zigbee conception or penetrating the system without the internet and using high-speed garçon transmission.

This exploration demonstrates Smart IoT bias for child safety and shadowing helping parents to detect and cover their children. If any abnormal values are read by the detector also an SMS is transferred to the parent's mobile and an MMS indicating an image captured by the periodical camera is also transferred. The unborn compass of the work is to apply the IoT device which ensures the complete result for child safety problems. currently, crime rates, particularly hijackings of children, are on the rise. likewise, it isn't always doable to be there with them because utmost parents must work to support their families. The suggested approach has the implicit to minimize the number of child- missing cases. This system provides a shadowing tool for parents to track their child's whereabouts outside exercising WFPS, allowing them to know the exact position of the youth. likewise, contribute to precluding this tragedy from recreating in the future.

### **CHAPTER 13**

### 13. APPENDIX

# PROJECT DEMONSTATION VIDEO UPLOADED HERE

### **SOURCE CODE:**

```
import json
import wiotp.sdk.device
import time

myconfig = {
    "identity": {
        "orgId": "wmjtfb",
        "typeId": "NodeRed",
        "deviceId": "1234"
      },
      "auth": {
```

```
"token": "1234567890"
   }
}
client = wiotp.sdk.device.DeviceClient(config=myconfig, logHandlers=None)
client.connect()
while True:
   name= "India"
   #in area location
   latitude= 10.928163814300948
   longitude= 78.7481278181076
   #out area location
   #latitude= 17.4219272
   #longitude= 78.5488783
   myData={'name': name, 'lat':latitude, 'lon':longitude}
   client.publishEvent(eventId="status",
                                            msgFormat="json",
                                                                      data=
                                                                                  myData,
qos=0),#onpublish=None
   print("Data published to IBM IOT platform: ",myData)
   time.sleep(10)
client.disconnect()
```

GITHUB LINK: <a href="https://github.com/IBM-EPBL/IBM-Project-30476-1660147203">https://github.com/IBM-EPBL/IBM-Project-30476-1660147203</a>

13PROJECT DEMO LINK: <a href="https://www.kapwing.com/videos/6378d37ee7c25f019fece9d0">https://www.kapwing.com/videos/6378d37ee7c25f019fece9d0</a>