


MAHENDRA INSTITUTE OF TECHNOLOGY

(AUTONOMOUS)





Office of the Controller of Examinations

A PROJECT REPORT

Submitted by

PRIYA.V (611619205039)
VASUNTHARA.D (611619205055)
JANANI.R (611619205015)
JANANI ISHWARYA.S (611619205016)

In partial fulfilment for the award of the degree

of

In
INFORMATION TECHNOLOGY

MAHENDRA INSTITUTE OF TECHNOLOGY (AUTONOMOUS)

MAHENDHIRAPURI, MALLASAMUDRAM, NAMAKKAL- 637 503

MAHENDRA INSTITUTE OF TECHNOLOGY

(Autonomous)

Mahendhirapuri, Mallasamudram, Namakkal DT- 637 503

Department of Information Technology BONAFIDE CERTIFICATE

Certified that this project report "IoT Based Safety Gadget for Child Safety Monitoring and Notification" is the Bonafide work of our team

"PRIYA.V (611619205039), VASUNTHARA.D(611619205055), JANANI.R(611619205015), JANANI ISHWARYA.S(611619205016)"

who carried out the project work under my supervision.

SIGNATURE			
Mr.K.SATHIYASEELAN			
SUPERVISOR			
Assistant professor			
Department of IT			
Mahendra Institute of Technology			
Mahendra Institute of Technology Namakkal - 637 503			
Namakkal - 637 503			

MAHENDRA INSTITUTE OF TECHNOLOGY

(Autonomous)

Mahendhirapuri, Mallasamudram, Namakkal DT -637 503

Department of Information Technology

CERTIFICATE OF PROJECT APPROVAL

This is to certify that the Project report titled "IoT Based Safety Gadget for Child Safety Monitoring and Notification" is the approved record of work doneby "PRIYA.V(611619205039), VASUNTHARA.D(611619205055), JANANI.R(611619205015), JANANI ISHWARYA.S (611619205016) "in partial fulfillment for the award of the Degree of B.TECH Information Technology and Engineering during the academic year 2019-2023.

SUPERVISOR	HEAD OF THE DEPARTMENT
Date:	(Signature with seal)
Submitted for the end semester viva voce	examination held on
Internal Examiner	External Examiner

ACKNOWLEDGEMENT

We would like to take this opportunity to say our thanks to the people who have helped us make this project a reality.

We wish to express our sincere thanks to our honorable chairman, **Shri. M.G.Bharath Kumar B.Ed., M.A., M.I.S.T.E.,** of our Educational trust, Kalipatty and the Managing Directors **Er.Ba.Mahendiran B.E.,** and **Er.Maha Ajay Prasad B.E.,** providing an extraordinary infrastructure.

We would like to express our sincere thanks to **Dr.T.Elango M.E., Ph.D.,** the principal of our college, for their kind encouragement and blessings to do this project.

We also thank **Dr.N.SATISH M.E., Ph.D.,** Head of the Department, Department of Information Technology and Engineering for the encouragement, valuable suggestions and support in doing this project.

We would like to thank our internal guide Mr.K.SATHYASEELAN M.TECH(IT), Department of Information Technology and Engineering for the kind co-operative and support rendered in making our project as success.

We would like to say our sincere thanks to all other faculties, Department of Information Technology and Engineering for their active and kind guidance and advices for our project.

Above all we would like to express my sincere gratitude and thanks to our parents for their valuable comments and suggestions for making success.

ABSTRACT

This paper is mainly streamed towards child safety solutions by developing a gadget which can be tracked via its GPS locations and also a panic button on gadget is provided to alert the parent via GSM module calling for help. Parental android app is developed to manage and track the device anytime. Smart gadget device is always connected to parental phone which can receive and make phone calls and also receive SMS on gadget via GSM module, also a wireless technology is implemented on device which is useful to bound the device within a region of monitoring range, if device is moving out of monitoring range then an alert will be triggered on binding gadget, this helps you keep a virtual eye on child. Health monitoring system on gadget checking for parameters like heart beat/pulse rate and temperature is included which can be monitored on parental app. Gadget also monitors whether it is plugged on hand or not using contact switch and alert the parent as soon as it is unplugged.

-

TABLE OF CONTENT

CHAPTER NO	TITLE	PAGE NO
	ABSTRACT	IV
	LIST OF FIGURES	
	LIST OF ABBREVIATIONS	
1	INTRODUCTION	1
	1.1 Project Overview	1
	1.2 Purpose	1
2	LITERATURE SURVEY	3
Existing problem		
References		
	Problem Statement Definition	
3	IDEATION & PROPOSED SOLUTION	4
	Empathy Map Canvas	4
	Ideation & Brainstorming	5
	Proposed Solution	7
	Problem Solution fit	8
4	REQUIREMENT ANALYSIS	9
	Functional requirement V	9

	Non-Functional requirements	9
5	PROJECT DESIGN	11
	Data Flow Diagrams	11
	Solution & Technical Architecture	11
	User Stories	12
6	PROJECT PLANNING & SCHEDULING	16
	Sprint Planning & Estimation	16
	Sprint Delivery Schedule	17
	Reports from JIRA	
7	CODING & SOLUTIONING	18
	(Explain the features added in	
	the project along with code)	
	Feature 1	18
	Feature 2	21
	Database Schema (if Applicable)	
8	TESTING	25
	Test Cases	25
	User Acceptance Testing	25
9	RESULTS	27
	Performance Metrics	
10	ADVANTAGES & DISADVANTAGES	32

11	CONCLUSION	
12	FUTURE SCOPE	33
13	APPENDIX	
	13.1 Source Code	34
	13.2 GitHub & Project Demo Link	34

1. Introduction

Project Overview

Creating a device that can be followed using GPS locations and has a panic button to inform the parent via a GSM module, this invention is primarily focused on improving child safety. An Android app forparents is created to control and monitor the device at any time. Smart gadget devices are always connected to parents' phones, which can receive and make phone calls as well as SMS gadget via a GSM module. Additionally, wireless technology is implemented on the device, which is useful to bind the device within a region of monitoring range; if the device is moving out ofmonitoring range, an alert will be triggered on a binding gadget, helping yournaintain a virtual watch over the child. An alert will be sent to a bound device if the device moves outside of the monitoring range, allowing you to keep a virtual check on the child. Devices come with a health monitoring system that checks for factors including heart rate, pulse, and temperature. The parental app allows for the monitoring of these indicators. Using a contact switch, the device also keeps track of whether or not it is plugged in and notifies the parent the moment it is unplugged.

Purpose

Approximately 80% of all reports of child abuse are made nowadays, with 74% of the victims being girls and the remaining 20% being males. In this world, a child goes missing every forty seconds. Children are the foundation of a country; if their future was threatened, it would have an effect on the development of the whole country.

The emotional and mental stability of the children is compromised as a result of the abuse, ruining their futures and careers. The things that happen to these defenseless kids are not their fault. Therefore, parents are in charge of raising their own children. However, parents are compelled to seek money because of the state of the economy and their desire to concentrate on their child's future and job. Consequently, it becomes challenging for them to constantly cling to their kids. We have created a setting in our system where this issue can be effectively solved. It enables parents to keep a close eye on their kids in real time while concentrating on their own careers without having to take any physical action. In essence, kids cannot tell their parents about the abuse they experience on a regular basis. They are too young to really comprehend what truly occurs to them. Parents find it challenging to recognize when their children are being abused. So, the main objective of this module is to help working parents to be free from worry about their children by tracking their movements at any time. An autonomous real-time monitoring system is required for every child worldwide in order to stop attacks on children.

2. Literature Survey

[1] Authors: Akash Moodbidri, Hamid Shahnasser

Title: Child safety wearable device.

Published in: 2017 IEEE. This gadget is designed to make it easier for parents to find their

kids.

There are already a lot of wearables available on the market that may be used to track children's daily activity as well as to locate them utilizing the Wi-Fi and Bluetooth capabilities of the device.

Merits: The advantage of this wearable over others is that it can be operated with any phone; a high-end smartphone is not necessary, and it doesn't require a person to be highly tech knowledgeable.

Demerits: Due to its low battery life, this device.

[2] **Authors:** M Nandini Priyanka, S Murugan, K. N. H. Srinivas, T. D. S. Sarveswararao, E. Kusuma Kumari.

Title: Smart IoT Device for Child Safety and Tracking.

Published in: 2019 IEEE.

The Link-It ONE board, programmed in embedded C, is used to construct the system. It is connected to temperature, heartbeat, touch, GPS, GSM, and digital camera modules. The work is innovative in that when a child is in need of rapid attention during an emergency, the system instantly notifies the parent or caregiver by sending an SMS.

Merits: The child's heartbeat, temperature, and touch are employed as parameters in a parametric analysis, and the results are shown.

Demerits: To put in place an IoT gadget that offers a comprehensive remedy for issues with child safety.

[3] Authors: Dheeraj Sunehera, Pottabhatini Laxmi Priya.

Title: Children Location Monitoring on Google Maps Using GPS and GSM.

Published in: 2016 IEEE.

This study offers parents an Android-based tool to follow their kids in real-time. Through internet-connected channels, various gadgets can communicate with one another. The concerned gadget has an internet connection to the server. Parents can use the gadget to keep track of their kids in real-time or to protect ladies. The location services offered by the GSM module are used in the suggested solution. It enables parents to receive an SMS with their child's location information.

Merits: Uses an Android terminal and ad hoc networks, a child tracking system.

Demerits: This device cannot be used in rural areas.

[4] Authors: Aditi Gupta, Vibhor Harit.


Published in: 2016 IEEE.

Title: Child Safety & Tracking Management System by using GPS.

This study offered a model for child safety using smartphones that give parents the option to track their children's whereabouts as well as the ability for kids to send a fast message and their current location in case of an emergency via Short Message Services.

3. Ideation and Proposed Solution

3.1Empathy map canvas

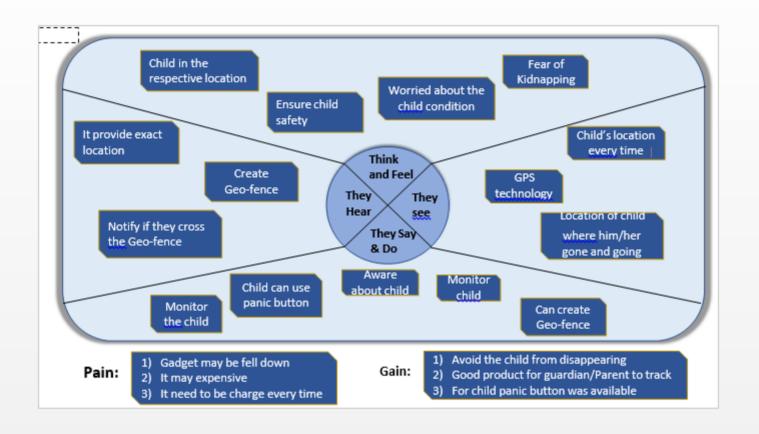

Ideation and brainstorming

Idea 1:

A compact wearable gadget with a pressure switch. The user can apply pressure to the device by squeezing or compressing itas soon as an attacker is preparing to attack the person or as soon as the person perceives any insecurity from a stranger. Instantaneouslythe pressure sensor detects this pressure, and a call is placed to the victim's parents' or guardian's mobile phone numbers that were put in the device at purchase, along with a regular SMS that includes the victim's location. The identical message will be delivered to the police if the call goes unanswered for an extended period of time. Further, a message with the person's current location is sent to the parent or guardian's phone by standard SMS if the person enters an area that is typically offlimits to them.

Idea 2:

By creating a device that can be followed using GPS locations and has a panic button to inform the parent via a GSM module, this invention is primarily focused on improving child safety. An Android app for parents is created to control and monitor the device at any time. Smart gadget device is always connected to parents' phone, which can receive and make phone calls as well as SMS on gadget via GSM module. Additionally, wireless technology is

implemented on the device, which is useful to bind the device within a region of monitoring range; if the device is moving out of monitoring range, an alert will be triggered on a binding gadget, helping you maintain a virtual watch over the child. An alert will be sent to a bound device if the device moves outside of the monitoring range, allowing you to keep a virtual check on the child. Devices come with a health monitoring system that checks for factors including heart rate, pulse, and temperature. The parental app allows for the monitoring of these indicators. Using a contact switch, the device also keeps track of whether or not it is plugged in and notifies the parent the moment it is unplugged.

Idea 3:

According to the latest surveys, the number of cases of child abduction and missing children in India is steadily rising. One of the primary worries for parents today is the safety of their children on school buses and outside of school premises, The suggested system makes an effort to give kids security features using new techniques that are introduced to the current safety system for better defense. Aportable unit, a cloud platform, and an Android application make up the proposed system. A raspberry pi 2 model B, a GPS receiver with antenna, and a pulse rate sensor make up the portable device. Usinga GPS receiver and a heartbeat sensor, this device will track the child's location in terms of latitude, longitude, and altitude. These data are transmitted to a raspberry pi module, which uses internet connectivity to inject them into elasticsearch. The android program has a user interface that displays the child's location on a map, the

path they took, and their rate of movement. The child'sheart rate is also continuously tracked by the application.

Proposed solution

S.No	Parameter	Description
1.	Problem Statement (Problem to be solved)	Nowadays, parents concern more about serious cases such as missing children, abduction and abuse. They cannot sit with their children or 24*7 hours to secure their children and monitor the children's activities.
2.	Idea / Solution description	Create a Child tracker which helps the parents incontinuously monitoring the child's location. The notification will be sent according to the child's location to their parents or caretakers. The entire location data will be stored in the database.
3.	Novelty / Uniqueness	The novelty of the work is that the system automatically alerts the parent/caretaker by sending notification, when immediate attention

		is required for the child during emergency.
4.	Social Impact / Customer Satisfaction	The parents may get the notification about whetherthe child reached the school or not
5.	Business Model (Revenue Model)	Easy to useLow costWeightless
6.	Scalability of the Solution	 Gadget ensures the safety and tracking of thechildren Parents need not worry about their children.

Problem solution fit

1.CUSTOMER SEGMENT(S) PARENTS CHILDREN		Our gadget will be cost efficient to the customers and our device will be compact, wearable easy device to be maintained.	5. AVAILABLE SOLUTIONS PLUSES & MINUSES Sensor gadget for child monitor. Making a child care taker to take care. Going along with child.		
2. PROBLEMS / PAINS + ITS FREQUENCY	PR	9. PROBLEM ROOT / CAUSE	7. BEHAVIOR + ITS INTENSITY	BE	
In today's developing world, child safety is a rising concern .	***********	Parent's carelessness.	Child care taker		
Lack of information about child location	***********	Child misbehavior	Old child monitoring system		
Need for child health condition		Uncontrolled children	Wired devices for monitoring		
Need for realtime information about Abduction	510000000	Bad society			
3. TRIGGERS TO ACT Easy way to moniter child and make them safety from abuse.		10. YOUR SOLUTION We have designed a LOT gadget for sensing their log abnormal sound information This will be easily monitore through their mobile phones.	8. CHANNELS of BEHAVIOR ONLINE Some of them are not aware of online gadgets monitoring system.	CH	
3. EMOTIONS REFORE / AFTER Child abuse is increased now a days		unough den mobile priories.	Most of our customers make sure of child safety by looking physical.	their	

4. Requirement analysis

Functional requirements

FR	Functional	Sub Requirement (Story / Sub-Task)		
No.	Requirement (Epic)			
		Registration through Form		
FR-1	User Registration	Registration through Gmail		
		Confirmation via Email		
FR-2	User Confirmation	Confirmation via OTP		
		Notification Via Mobile App and normal		
FR-3	Notification	Message		
FR-4	Monitoring	App to monitor the child location		
FR-5	Health monitoring	Heart beat rate, Temperature		


Non-Functional requirements:

FR No.	Non-Functional Requirement	Description
NFR -1	Usability	This model has GSM that can help to notify the parents in case of emergency or the smart band not connected
NFR -2	Security	Parents can feel secure because if the child forget or not connect the band it

		will notify the parents and if panic bu
		on is pressed it will send alert message
		and parents able to track the
		location
NFR	Reliability	Easy to usePortable
-3		
		• Flexible
		• Cost effective
NFR	Performance	 Create a Child tracker which
-4		helps the parents with
		continuously monitoring the
		child's location.
		The notification will be
		sentaccording to the
		child's location to their
		parents or caretakers.
NFR	Availability	Track your child even in a crowd
-5		Know the current location
NFR	Scalability	This model ensures the safety and
-6		tracking of the children .Parents
		need not worry about
		their children.
		then children.

5. PROJECT DESIGN

Data Flow Diagrams

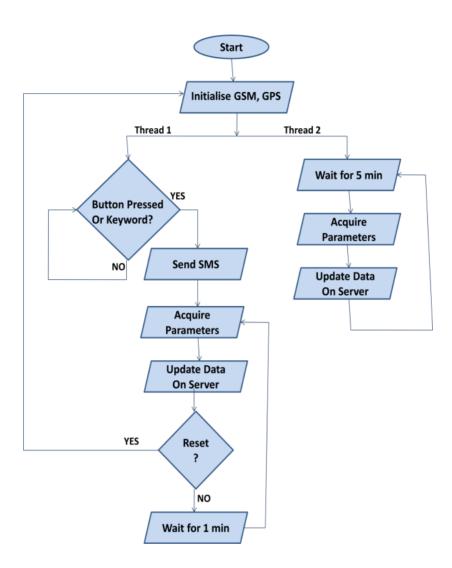

Solution & Technical Architecture

Solution architecture is a complex process – with many sub-processes – that bridges the gap between business problems and technology solutions. Its goals are to:

- Find the tech solution to solve existing business problems.
- Describe the structure, characteristics, behavior, and other aspects of the software to project stakeholders.

- Define features, development phases, and solution requirements.
- Provide specifications according to which the solution is defined, managed, anddelivered.

User Stories

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release	
Custo mer (Mob ile user)	Registration	USN-1 (FATHER)	As a user, Ican register by entering my email, and password, and confirmin g my password.	account/dashboard and receive a confirmation email & click		Sprint-1	
Rout	e Planning	Wireless Network/ Internet	I can acess the location of my	GeoFencing			

USN-2	children using the credited as provided as a Father. As a user, I	I can access my	High	Sprint-
(MOTHER)	can register by entering my email, and password, and confirming my password. I can access the location of my children using the credited as provided as a Mother.	and received confirmation email & click confirm		1

	USN-3 (GUARDI A N/ CARETAKE R)		I can access my account/dashboard and receive a confirmation email & click confirm	Mediu	Sprint-1
Login	USN-4		I can access my account/dashboard.	Mediu m	Sprint-2
Dashboard	USN-5	As a user, I can fix the Geo-fence for my child's location so that I will receive alerts if my child	I can monitor the current location of my child.	High	Sprint-2

Crosse		
s the		
geo-		
fence		
And		
monitor		
the		
child's		
pulse an	d	
check		
whether		
the		
device		
is		
plugged		
in or not		

6. PROJECT PLANNING & SCHEDULING

Sprint planning and estimation

Spri	Functional	User	User Story /	Story	Priority	Team
nt	Requireme	Story	Task	Points		Members
	nt (Epic)	Number				
Sprin t-1	Registration	USN-1	As a Parent/Guardian,I can register for the application by entering my email, password, and confirming my password.		High	Padam Satya Reshma
Sprin t-1		USN-2	As a Parent/ Guardian, I can register for the application through Gmail		Medi um	Preethiga
Sprin t-1	User Confirmation	USN-3	As a parent I will receive connection , location in sms / email once I have entered this	1	High	Logapriya

			application			
Sprin	Login	USN-4	As a	2	High	Subalakshmi
t-1			parent/ guardian			
			, I can log into			
			the			
			application by			
			entering email			
			and password.			

Sprint delivery schedule

Sprint	~ .	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed(on Planned End Date)	Sprint Release Date (Actual)
Sprint	20	4 Days	24 Oct	29 Oct	20	29 Oct
-			2022	2022		2022
1						
Sprint	20	5 Days	28 Oct	05 Nov	20	04 Nov
-			2022	2022		2022
2						

Sprint	20	8 Days	02 Nov	12 Nov	20	11 Nov
-			2022	2022		2022

3						
Sprint	20	9 Days	10 Nov	19 Nov	20	19 Nov
-			2022	2022		2022
4						

7. CODING & SOLUTIONING (Explain the

features added in the project along with code)

Feature 1:

(Adding Geo-fence)

- Geo-fence is like a round wall covering the given location. So parents can use them to mark the location where their children are going.
- Multiple Geo-fence can be added.

CODING:

```
package
com.example.geofence; import
android.app.PendingIntent; import
android.content.Context; import
android.content.ContextWrapper;
import android.content.Intent;
import android.widget.Toast;
```

import

com.google.android.gms.common.api.ApiException; import com.google.android.gms.location.Geofence; import com.google.android.gms.location.GeofenceStatusCodes; import com.google.android.gms.location.GeofencingRequest; import com.google.android.gms.maps.model.LatLng; public class GeofenceHelper extends ContextWrapper {

```
private static final String TAG = "GeofenceHelper";
PendingIntent pendingIntent;
public GeofenceHelper(Context base) {super(base);
}
```

```
public GeofencingRequest getGeofencingRequest(Geofence
geofence) { return new GeofencingRequest.Builder()
.addGeofence(geofence)
        .setInitialTrigger(GeofencingRequest.INITIAL_TRIGGER_ENTER)
                .build();
          }
          public Geofence getGeofence(String ID, LatLng latLng, float
radius, int transitionTypes) {
            return new Geofence.Builder()
                .setCircularRegion(latLng.latitude, latLng.longitude, radius)
                .setRequestId(ID)
.setTransitionTypes(transitionTypes)
                 .setLoiteringDelay(5000)
                 .setExpirationDuration(Geofence.NEVER_EXPIRE)
                .build();
          }
          public PendingIntent getPendingIntent() {if
            (pendingIntent != null) {
              return pendingIntent;
            }
            Intent intent = new Intent(this,
        GeofenceBroadcastReceiver.class);
            pendingIntent = PendingIntent.getBroadcast(this, 2607, intent,
```

PendingIntent.FLAG_IMMUTABLE);

```
Return pendingIntent;
 }
 Public String getErrorString(Exception e) {if
   (e instanceof ApiException) {
    ApiException apiException = (ApiException) e;
    switch (apiException.getStatusCode()) {
      case GeofenceStatusCodes
        .GEOFENCE_NOT_AVAILABLE:
    return "GEOFENCE_NOT_AVAILABLE";
case GeofenceStatusCodes
     .GEOFENCE TOO MANY GEOFENCES:
         "GEOFENCE_TOO_MANY_GEOFENCES";
      case GeofenceStatusCodes
     .GEOFENCE_TOO_MANY_PENDING_INTENTS:
               "GEOFENCE_TOO_MANY_PENDING_INTENTS";
        return
    }
   }
  return e.getLocalizedMessage();
```

Feature 2 (Alert Notification)

• Once geofence is added , when the child enters the geofence a notification willbe sent

• When the child leaves the geofence a notification will be sent.

```
package com.example.geofence; import
android.content.BroadcastReceiver; import
android.content.Context; import android.content.Intent;
import android.location.Location; import
android.os.CountDownTimer; import android.util.Log;
import android.widget.Toast; import
com.google.android.gms.location.Geofence;import
com.google.android.gms.location.GeofencingEvent
import java.util.List; import android.os.Handler;
        public class GeofenceBroadcastReceiver extends BroadcastReceiver {private
          static final String TAG = "GeofenceBroadcastReceiv";
          @Override
          public void onReceive(Context context, Intent intent) {
            // TODO: This method is called when the BroadcastReceiver is
receiving
            // an Intent broadcast
            //.
           /*Toast.makeText(context, "GEOFENCE_ENTERED",
        Toast.LENGTH SHORT).show();
            final Toast mToastToShow;
```

```
int toastDurationInMilliSeconds = 1200000; mToastToShow
= Toast.makeText(context, "GEOFENCE_EXITED",
        Toast.LENGTH LONG);
        // Set the countdown to display the toast
            CountDownTimer toastCountDown;
            toastCountDown = new
        CountDownTimer(toastDurationInMilliSeconds, 100000) {public
              void onTick(long
millisUntilFinished) {
                             mToastToShow.show();
}
              public void onFinish() {
                mToastToShow.cancel();
             }
            };
        // Show the toast and starts the countdown
            mToastToShow.show();
            toastCountDown.start();*/
        NotificationHelper notificationHelper = new NotificationHelper(context);
notificationHelper.sendHighPriorityNotification("GEOFENCE_TRANSITION_ENT
ER",
        "", MapsActivity.class); GeofencingEvent
          geofencingEvent =
```

```
GeofencingEvent.fromIntent(intent);
           if (geofencingEvent.hasError())
           Log.d(TAG, "onReceive: Error receiving geofence event...");
              return;
            }
            List<Geofence> geofenceList
geofencingEvent.getTriggeringGeofences();
      for (Geofence geofence:
geofenceList) {
              Log.d(TAG, "onReceive: " + geofence.getRequestId());
            }
              Location location = geofencingEvent.getTriggeringLocation();int
        //
            transitionType = geofencingEvent.getGeofenceTransition();
            switch (transitionType) {
         case
Geofence.GEOFENCE_TRANSITION_ENTER:
                notificationHelper.sendHighPriorityNotification("Entered the
        Location", "", MapsActivity.class);
                break;
              case Geofence.GEOFENCE_TRANSITION_EXIT:
```

notificationHelper.sendHighPriorityNotification("Exited the Location ", "",

MapsActivity.class);

break;

}

}

8. TESTING

Test Cases

Test case ID	Feature Type	Compos	Test Scenario	Pre-Requisite	Steps To Execute	Test Data	Expected Result	Actual	Stat es	Commets	TC for Automation(Y/N)	BUG	Executed By
LoginPagc_TC_0 01	Functional	Home Page	Verify user is able to see the Login/Signup popup when user clicked on App		1.Enter App 3.Verify login/Singup popup displayed or not		Login/Signup popup should display	Working as expected	Рыз		Y		SnehoShri , Swetha
LoginPage_TC_O O2	u	Home Page	Verify the UI elements in Login/Sigoup popup		1Enter App 2. Yerify loginifising up popup with below UI elements: a.email text box b.password text box c.l.ogin button d.New outomer? Register		Application should show below UI elements: acmeil text box bipacoword text box c.Login button with orange colour d.New customer? Register	Working as expected	Pass		Y		Shaamugapriya , Shwetka
LoginPage_TC_O O3	Functional	Home page	Verify user is able to log into application with Valid credentials		1.Enter App 2.Enter Valid username/email in Email text box 3.Enter valid password in password text box 4. Click on locin button	Username: abod@gmail.com password: Testing123	User should navigate to user account homepage	Working as expected	Pass		Y		Shokthi
LoginPage_TC_0 04	Functional	Login page	Verify user is able to log into application with InValid credentials		Email text box 3.Eater valid password is password text box 4. Click on locin button	Username: abed@gmail password: Testing 123	Application should show "Login error. There is no user record corresponding to the identifier"	Working as expected	pass		Y		Shahthi , Shannagapriya
LoginPage_TC_O O4	Functional	Login page	Verify user is able to log into application with Valid credentials		1.Enter App 2.Enter Valid username/email in Email text box 3.Enter Invalid password in password text box 4. Click as Isola buttosa	Username: sect9ec020@ssirantsp.ed u.in password: Testing t23678686786876 876		Working as expected	Pass		Y		Shwetha B, SnehaShri
LoginPage_TC_0 05	Functional	Login page	Verify user is able to log into application with InValid credentials		1.Enter App 2.Enter la Valid economic/email in Email text box 3.Enter lavalid password in password text box 4. Citick par lands buttons	Username: abod password: Testing123678686786876 876	Application should show "Login arror. There is no wear record corresponding to the identifier"	Working as expected	Pass		Y		Swetha
Dasboard	Funcational	Dashboard	Adding geofectic in the location aced		1.Enter App 2.Easter the valid username and password		Application show a red circle around the location	Working as expected	Pass		Y		Sneko Shrii
Alert Notification	Funcational	Notification	Motification when the user entered the geofence	-	1.Enter App 2.Exter the valid username and password 3.Add the Geofence		Application seat the notification " Entered the location"	Working as expected	Pass		Y		Shammugapriya , Shwotha
Alert Notification	Funcational	Notification	Notification when the user exited the geofence		1Enter App 2.Enter the valid username and password		Application seat the notification " Exited the location"	Working as expected	Pass		Y		Shakthi , Swetha

User Acceptance Testing

1 .Defect Analysis

Resolution	Severity 1	Severit y2	Severit y3	Severit y4	Subtotal
By Design	11	4	2	2	19
Duplicate	1	1	2	0	4
External	2	3	0	1	6
Fixed	10	2	3	20	35
Not Reproduced	0	0	2	0	2
Skipped	0	0	2	1	3
Won't Fix	0	5	2	1	8
Totals	24	15	13	25	77

2. Test Case Analysis

Sec on	Total Cases	Not Tested	Fail	Pass
Print	5	0	1	4
Engine				
Client	47	0	2	45
Applica on				
Security	3	0	0	3

Outsource	2	0	0	2
Shipping				
Exception	11	0	2	9
Reporting				
Final	5	0	0	5
Report				
Output				
Version	3	0	1	2
Control				

9. RESULTS


1. User Registration:

Users get registered to the app using their mail and create their password. On the user is registered a verification mail will be sent to the user mail id. The user needs to verify the account. All user details are stored in the firebase and verification mail is sent by firebase authentication .

Registration Page:



Verification mail

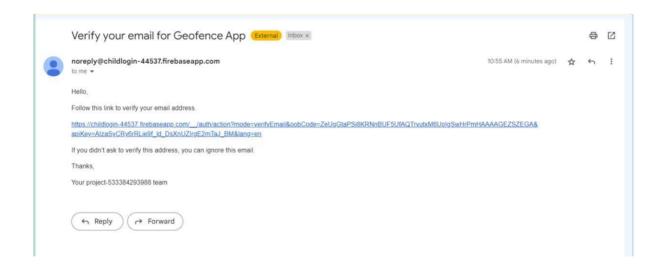


2. User Login

Users with their registered mail and password will login to the account. As the details are stored in firebase, when invalid email or password is entered a message say invalid email or password occur .

Login page:




User Details

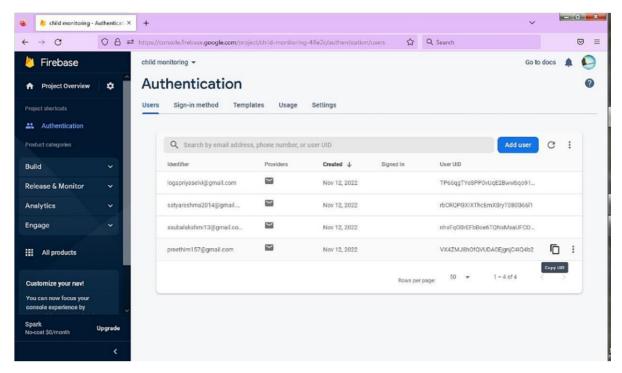


3. Adding Geofence and Alert Notification

Users can add geofence in the location where they want to add or where their child is going to play so they can monitor the child location . Once the child enters the geofence alert notification says entered the location will be displayed . When the child leaves the geofence alert notification says exited the location will be displayed.

Geofence

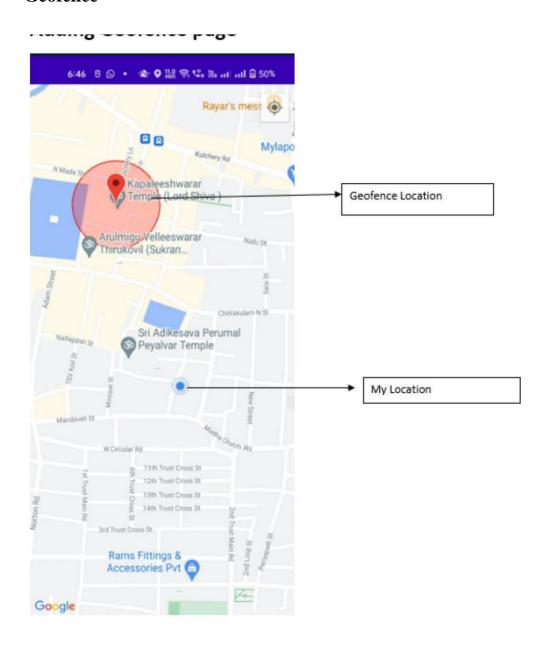

Notification

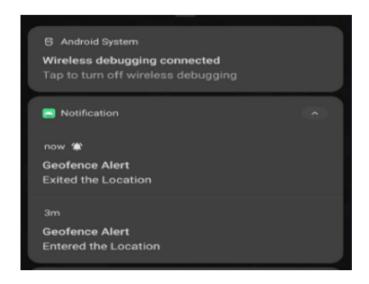

10. Advantages and Disadvantages

The parent can monitor their child from anywhere at any time, and also get a notification when the child goes away from the permitted radius. It also allows the parent to know if their child is in any dangerous situation. The disadvantages of this system are that the child could not produce the exact alert command during a panic condition. The command produced maynot match the previously stored command. This project requires manual intervention.

11. Future Scope

In our system, we use the Internet of Things, GPS, GSM, and Raspberry Pi to automatically monitor the youngster in real time. When we utilize a web camera and GPS to actively monitor, this system needs network

connections, satellite communication, and a high-speed data connection. It is challenging to keep an eye out for any network problems or satellite connection problems. Additionally, there is a lag when streaming videos through the server. The Zigbee concept or accessing the system without the internet and employing high-speed server transmission can therefore be used in the future to solve these problems.

12. Conclusion

Future is similar to the word children. Young people are the future pillars of one's nation, as Dr. A.P.J. Abdul Kalam once said, thus it is important to protect today's children's dreams and lives in order to give them a better future. Therefore, every parent should take good care of their own children to prevent them from being victims of abuse that will completely harm them on a physical, mental, and emotional level, wrecking our future. Due to the significance of our future, our product makes it simple for parents to track their kids and regularly visually monitor them, enabling them to assure their safety and lowering the incidence of child abuse.

13 Appendix

Source code

Source code link:

https://github.com/IBM-EPBL/IBM-Project-30638-1660151558

/tree/main/Fi nal%20Deliverable

GitHub and Project demo link

GitHub link:

https://github.com/IBM-EPBL/IBM-Project-30638-1660151558

Demolink:

https://drive.google.com/file/d/1LPI3CooOJUlgo0wdsG6x 75HibjM2Z35n/view?usp=share_link