Assignment -4
ESP32 Programming with IBM Cloud

Question-1:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100cms send "alert" to ibm cloud and display in device recent events.

Upload document with wokwi share link and images of ibm cloud.

Solution:

```cpp
#include <WiFi.h>//library for wifi
#include <PubSubClient.h>//library for MQtt

#define ECHO_GPIO 12
#define TRIGGER_GPIO 13
#define MAX_DISTANCE_CM 100 // Maximum of 5 meters
#include "Ultrasonic.h"

Ultrasonic ultrasonic(13, 12); int
distance;
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
//-------credentials of IBM Accounts------

#define ORG "iagzqu"//IBM ORGANITION ID
#define DEVICE_TYPE "Deepak"//Device type mentioned in ibm watson IOT
Platform #define DEVICE_ID "123"//Device ID mentioned in ibm watson IOT
Platform #define TOKEN "12345678" //Token
String data3; float h, t;


//-------- Customise the above values --------
char   server[]  =  ORG  ".messaging.internetofthings.ibmcloud.com";//  Server  Name  char
publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of event perform and format
in which data to be send
char subscribetopic[] = "iot-2/cmd/command/fmt/String";// cmd REPRESENT command type AND
COMMAND IS TEST OF FORMAT STRING char authMethod[] = "use-token-auth";// authentication
method char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id


//------------------------------------------------------------------------------------
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient); //calling the predefined client id by
passing parameter like server id,portand wificredential
void setup()// configureing the ESP32
{
  Serial.begin(115200);
  delay(10);
  Serial.println();
  wificonnect();
  mqttconnect();
```

```
  }
void loop()// Recursive Function
 {

   distance = ultrasonic.read(CM);
   if(distance < 100){
   Serial.print("Distance in CM: ");
   Serial.println(distance);
   PublishData(distance);
   delay(1000); if
   (!client.loop()) {
     mqttconnect();
   }


   }

   delay(1000);



 }

 /*.......................................retrieving to Cloud ............................... */

 void PublishData(float temp) {
   mqttconnect();//function call for connecting to ibm
   /* creating the String in in form JSon to update the data to ibm
      cloud
   */
   String payload = "{\"Alert Distance:\":";
   payload += temp; payload += "}";



   Serial.print("Sending payload: ");
   Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {

    Serial.println("Publish ok");// if it sucessfully upload data on the cloud then it will
 print publish ok in Serial monitor or else it will print publish failed
   } else {
     Serial.println("Publish failed");
   }


 }

 void mqttconnect() {
   if (!client.connected()) {
     Serial.print("Reconnecting client to ");
     Serial.println(server);
     while (!!!client.connect(clientId, authMethod, token))
       { Serial.print("."); delay(500);
     }
      initManagedDevice(); Serial.println();
   }
 } void wificonnect() //function defination for
 wificonnect
 {
```

```cpp
  Serial.println();
  Serial.print("Connecting to ");


  WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.println("");
  Serial.println("WiFi connected");
  Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
}
void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED"); }
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{


  Serial.print("callback invoked for topic:
  "); Serial.println(subscribetopic); for (int
  i = 0; i < payloadLength; i++) {
  //Serial.print((char)payload[i]); data3 +=
  (char)payload[i];
  }
  Serial.println("data: "+ data3);
  if(data3=="lighton") {
Serial.println(data3);
  } else
  {
Serial.println(data3);
  } data3="";
}
```

```cpp
1   #include <WiFi.h>//library for wifi
2   #include <PubSubClient.h>//library for MQtt
3
4   #define ECHO_GPIO 12
5   #define TRIGGER_GPIO 13
6   #define MAX_DISTANCE_CM 100 // Maximum of 5 meters
7   #include "Ultrasonic.h"
8
9   Ultrasonic ultrasonic(13, 12);
10  int distance;
11
12  void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
13
14  //-------credentials of IBM Accounts------
15
16  #define ORG "bxddo9"//IBM ORGANITION ID
17  #define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson IOT Platform
18  #define DEVICE_ID "Assign4"//Device ID mentioned in ibm watson IOT Platform
19  #define TOKEN "45625689713"    //Token
20  String data3;
21  float h, t;
22
23
24  //-------- Customise the above values --------
25  char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
26  char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of event perform
27  char subscribetopic[] = "iot-2/cmd/command/fmt/String";// cmd  REPRESENT command type AND
28  char authMethod[] = "use-token-auth";// authentication method
29  char token[] = TOKEN;
30  char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id
31
32
33  //------------------------------------------------
34  WiFiClient wifiClient; // creating the instance for wificlient
35  PubSubClient client(server, 1883, callback ,wifiClient); //calling the predefined client
```
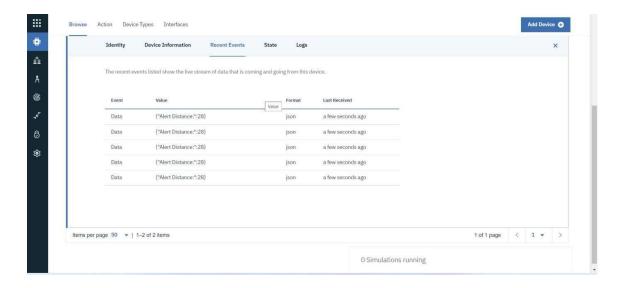
Publish ok
Distance in CM: 28
Sending payload: {"Alert Distance:":28.00}
Publish ok
Distance in CM: 28
Sending payload: {"Alert Distance:":28.00}
Publish ok

Wokwi share link:

https://wokwi.com/projects/346461295197815380