Assignment 4

Signs with Smart Connectivity for Better Road Safety

Assignment Date	20 Oct 2022
Student Name	Divyasri T S
Student Roll num	910619106014
Maximum Marks	2 Marks

Question:

Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events. Upload document with wokwi share link and images of IBM cloud.


Code in Wokwi:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
//----credentials of IBM Accounts-----
#define ORG "confidential"//IBM ORGANITION ID
#define DEVICE TYPE "gaya"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "0605"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "confidential" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE TYPE ":" DEVICE ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
```


```
Serial.begin (115200);
pinMode(trigPin, OUTPUT);
pinMode(echoPin, INPUT);
wificonnect();
mqttconnect();
}
void loop()
digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin, HIGH);
distance = duration * SOUND SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if (distance<100)</pre>
Serial.println("ALERT!!");
delay(1000);
PublishData(distance);
delay(1000);
if (!client.loop()) {
mqttconnect();
delay(1000);
void PublishData(float dist) {
mqttconnect();
String payload = "{\"Distance\":";
payload += dist;
payload += ",\"ALERT!!\":""\"Distance less than 100cms\"";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
}
void mqttconnect() {
```

```
if (!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!!!client.connect(clientId, authMethod, token)) {
Serial.print(".");
delay(500);
initManagedDevice();
Serial.println();
void wificonnect()
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6);
while (WiFi.status() != WL_CONNECTED) {
delay(500);
Serial.print(".");
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
void initManagedDevice() {
if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
}
else {
Serial.println("subscribe to cmd FAILED");
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {</pre>
//Serial.print((char)payload[i]);
data3 += (char)payload[i];
Serial.println("data: "+ data3);
data3="";
}
```

Wokwi sketch and Simulation:

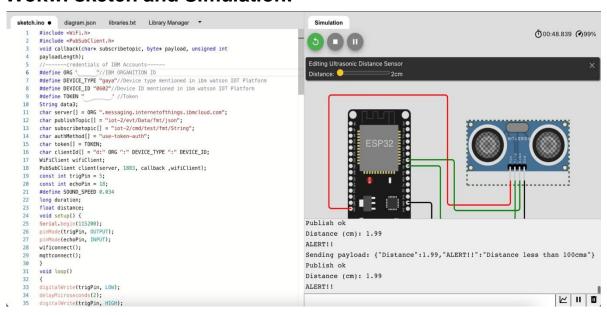

IBM Watson IOT Platform:

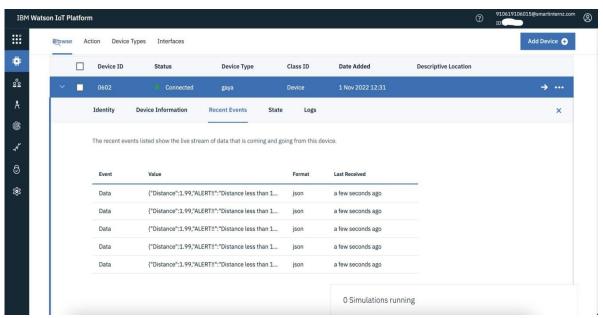

Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device **Recent Events**.