

Smartfarmer - IoT Enabled Smart Farming Application


SOLUTION ARCHITECTURE

Date	28 October 2022
Team ID	PNT2022TMID16916
Project Name	Smartfarmer - IoT Enabled Smart Farming Application
Maximum Marks	4 Marks

Team Leader: Mohamed Thowfiq
Raja S

Team members: Sangareswaran R
Mohamed Abdul Rahuman P
Kamatchi M

Solution Architecture Diagram:

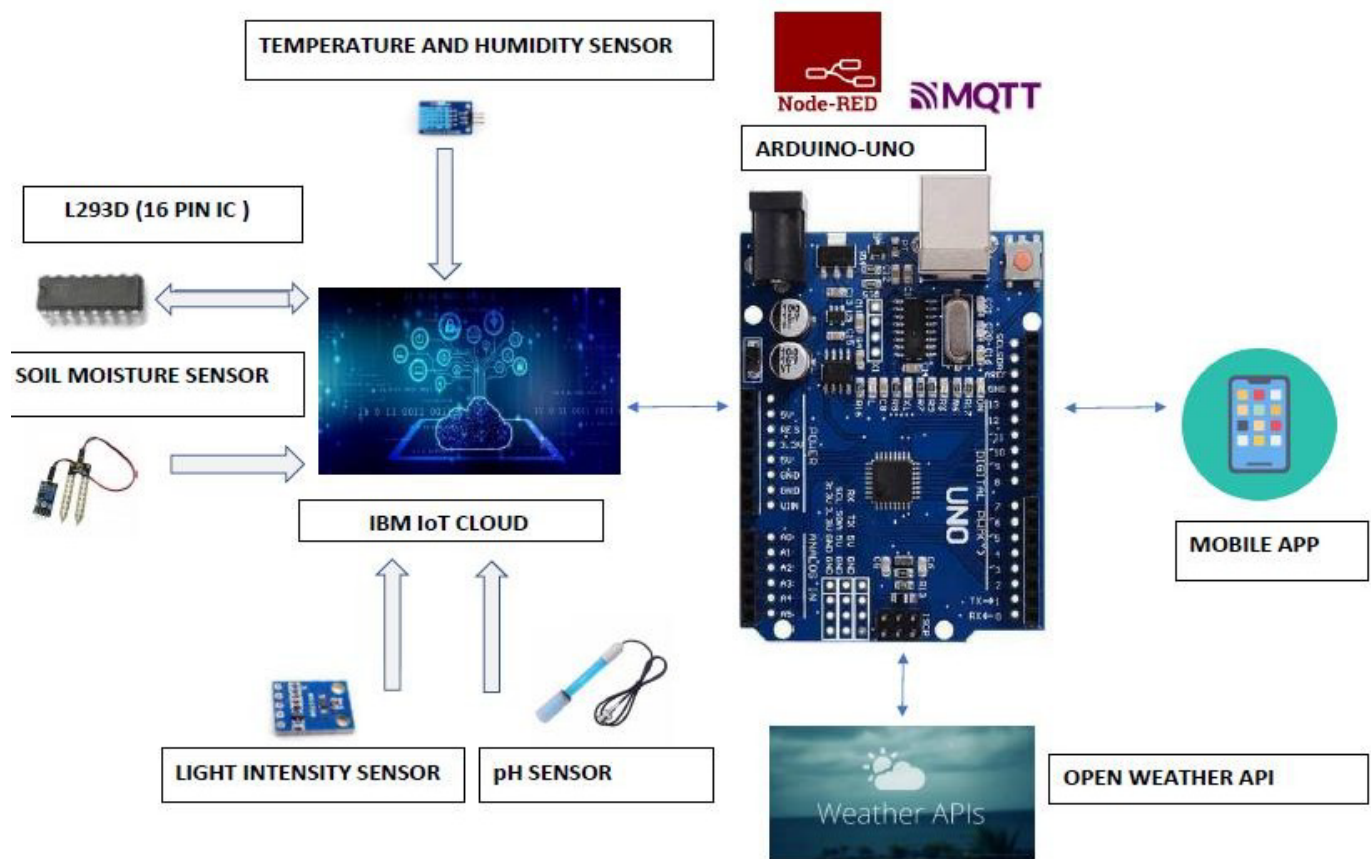

- The different soil parameters (temperature, humidity, light intensity, pH level) are sensed using different sensors and the obtained value is stored in IBM cloud.
- The L293D is a 16-pin Motor Driver IC which can control a set of two DC motors simultaneously in any direction. The L293D is designed to provide bidirectional drive currents of up to 600 mA (per channel) at voltages from 4.5 V to 36 V (at pin 8!).
- Arduino UNO is used as a processing unit which processes the data obtained from sensors and weather data from weather API.
- Node-RED is a programming tool for wiring together hardware devices, APIs and online services in new and interesting ways. It provides a browser-based editor.
- The MQTT protocol is followed for communication.
- All the collected data are provided to the user through a mobile application which was developed using MIT app inventor.
- Open Weather provides hyperlocal minute forecast, historical data, current state and from short-term to annual and forecasted weather data. All data is available via industry standard APIs.
- The user could make decision through an app, whether to water the crop or not, depending upon the sensor values.