


Project Design Phase-II Data Flow Diagram & User Stories

Date	16 October 2022
Team ID	PNT2022TMID18942
Project Name	Project – Hazardous Area Monitoring for Industrial Plant powered by IoT.
Maximum Marks	4 Marks

Data Flow Diagrams:


A Data Flow Diagram (DFD) is a traditional visual representation of the information flows within a system. A neat and clear DFD can depict the right amount of the system requirement graphically. It shows how data enters and leaves the system, what changes the information, and where data is stored.

FLOW:

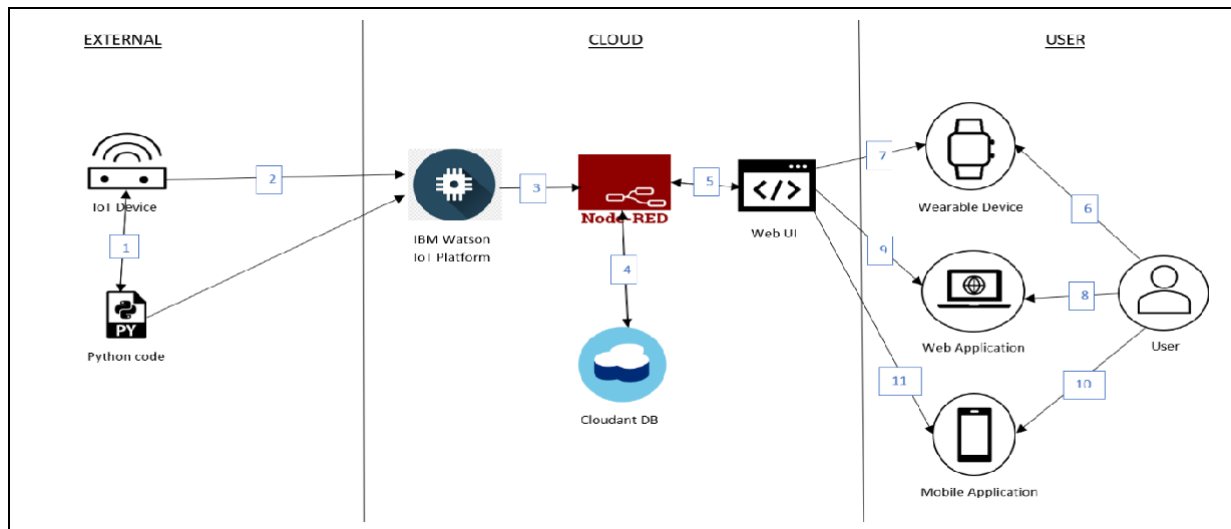

1. Necessary Python code for collecting temp. details from IoT device is written.
2. IoT device is connected with the IBM Watson IoT platform for gathering data.
3. Next step uses Node-Red services after IoT platform is all set.
4. Cloudant DB is used for storing and retrieving data.
5. Node-Red services are used to create Web application and UI designs.
6. (6,7,8,9,10,11) The user uses Smartwatch, Web and mobile app to receive various information and alerts.

DFD Level 0 (Industry Standard)

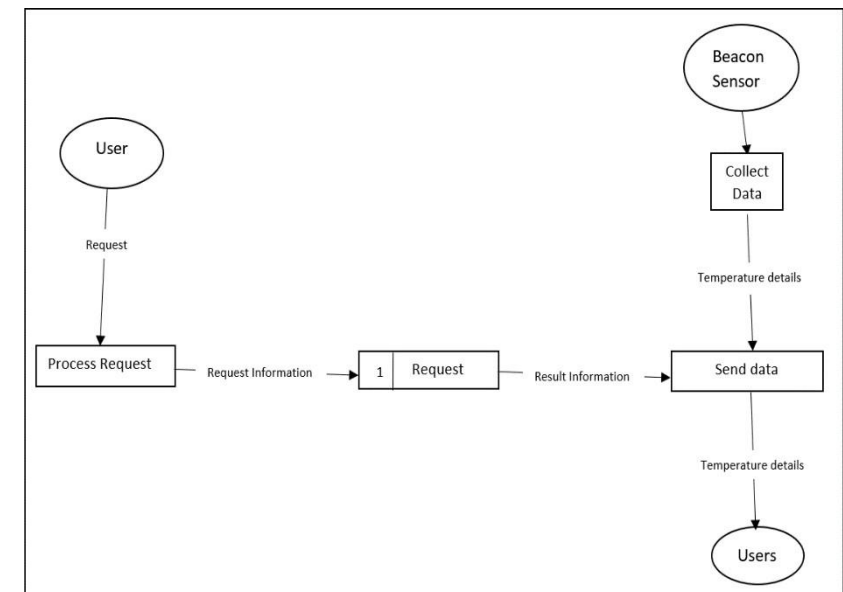

User Stories

Use the below template to list all the user stories for the product.

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release
Technician	Installation	USN-1	The technician must install the smart beacons at points to ensure the entire area of the plant is covered.	A beacon can be found in every area of the plant.	High	Sprint-1
	Data Gathering	USN-2	The beacons obtain the temperature of their respective area using sensors.	The temperature of areas within the plant is obtained.	High	Sprint-1
	Data Sync	USN-3	The beacons send their data to the cloud in thereal time which is in turn sent to nearby wearable devices and the administrators dashboard.	Data is sent to the cloud successfully and synced with other devices.	High	Sprint-1
Worker	Wearable device display	USN-4	The wearable devices should display the datasent by beacons within the area.	The user can see the temperature of the area on their device.	High	Sprint-1
	Wearable device adjustments	USN-5	The user can adjust the size of the wearable device to better suit them.	The user can make adjustments to the deviceto make working with it more comfortable.	Low	Sprint-2
	Wearable display customization	USN-6	The user can adjust the device display to suittheir needs on the device itself.	The user can modify the display of the device to increase readability.	Medium	Sprint-2
	SMS Notifications	USN-7	The user is sent a notification to their phone from the wearable device through an API whenthe area they are in reaches dangerous temperatures.	The user is informed of potential danger via SMS as soon as it is detected by the beacons.	High	Sprint-1
Administrator	Admin Dashboard	USN-8	The beacons send the data through the cloud toa dashboard which is run by the administrator.	The data of all the beacons can be viewed by the administrator of the plant.	High	Sprint-1
	Dashboard Customization	USN-9	The dashboard can be customized by the admin to suit their personal requirements and priorities.	The admin can customizethe UI for their dashboard.	Medium	Sprint-2