ASSIGNMENT - 4

SMARTFARMER - IOT ENABLED SMART FARMING APPLICATION

Student Name	Kavin Kumar R
Student Roll Number	922519106069

Ouestion-1:


Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events. Upload document with wokwi share link and images of IBM cloud

CODE 1:

```
#include <WiFi.h>
  #include <PubSubClient.h> void callback(char* subscribetopic, byte* payload, unsigned
int payloadLength);
  #define ORG "ocknc6"
 #define DEVICE TYPE "esp32"
 #define DEVICE ID "12345"
 #define TOKEN "12345678" String data3; char server[] = ORG
  ".messaging.internetofthings.ibmcloud.com"; char publishTopic[]
 = "iot-2/evt/Data/fmt/json"; char subscribetopic[] =
 "iot2/cmd/test/fmt/String"; char authMethod[] = "use-token-
 auth"; char token[] = TOKEN; char clientId[] = "d:" ORG ":"
 DEVICE_TYPE ":" DEVICE_ID;
 WiFiClient wifiClient;
 PubSubClient client(server, 1883, callback ,wifiClient);
 const int trigPin = 5; const int echoPin = 18; #define
 SOUND_SPEED 0.034 long duration; float distance; void
 setup() { Serial.begin(115200); pinMode(trigPin, OUTPUT);
 pinMode(echoPin, INPUT); wificonnect(); mqttconnect();
 void loop()
 {
 digitalWrite(trigPin,
                                 LOW);
 delayMicroseconds(2);
 digitalWrite(trigPin,
                                HIGH);
 delayMicroseconds(10);
 digitalWrite(trigPin, LOW); duration =
 pulseIn(echoPin, HIGH); distance =
 duration * SOUND SPEED/2;
 Serial.print("Distance (cm): ");
 Serial.println(distance); if(distance<100) {</pre>
 Serial.println("ALERT!!"); delay(1000);
 PublishData(distance);
 delay(1000); if (!client.loop())
 { mqttconnect();
 } } delay(1000);
 } void PublishData(float
 dist) {
 mattconnect();
 String payload = "{\"Distance\":"; payload += dist; payload
 += ",\"ALERT!!\":""\"Distance less than 100cms\""; payload
 += "}";
 Serial.print("Sending payload: ");
 Serial.println(payload);
 if (client.publish(publishTopic, (char*) payload.c_str())) {
 Serial.println("Publish ok");
```

```
} else {
 Serial.println("Publish failed");
 } } void mqttconnect()
 { if
 (!client.connected()) {
 Serial.print("Reconnecting client to ");
 Serial.println(server); while
 (!!!client.connect(clientId, authMethod, token)) {
 Serial.print("."); delay(500);
 } initManagedDevice();
 Serial.println();
 } }
 void wificonnect()
 {
 Serial.println();
Serial.print("Connecting
 WiFi.begin("Wokwi-GUEST", "", 6); while
 (WiFi.status() != WL CONNECTED) {
 delay(500); Serial.print(".");
 Serial.println("");
 Serial.println("WiFi connected");
 Serial.println("IP address: ");
 Serial.println(WiFi.localIP());
 } void
 initManagedDevice() {
 if (client.subscribe(subscribetopic)) {
 Serial.println((subscribetopic));
 Serial.println("subscribe to cmd OK");
 } else {
 Serial.println("subscribe to cmd FAILED");
 payloadLength) {
 Serial.print("callback invoked for topic:
 "); Serial.println(subscribetopic); for (int
 i = 0; i < payloadLength; i++)</pre>
 { data3 +=
 (char)payload[i];
 Serial.println("data: "+ data3); data3="";
```

Output and Simulation:

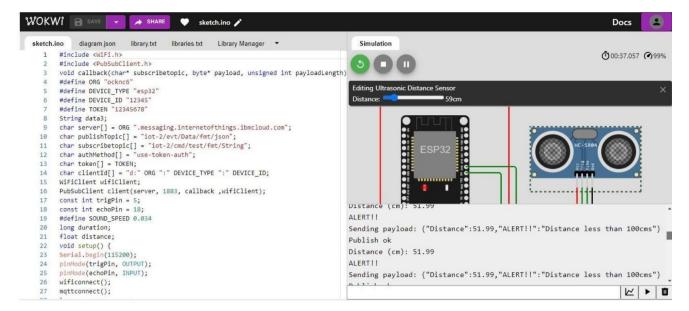

Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events.

