

#### Assignment -4

Date	25 November 2022
Project Name	IOT Based Smart Crop Protection System for Agriculture
Team Id	PNT2022TMID15088
Maximum Marks	2 Marks

#### Question:

Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events. Upload document with wokwi share link and images of IBM cloud

#### Program:

```
#include <WiFi.h>
#include <PubSubClient.h>
#include <ArduinoJson.h>

WiFiClient wifiClient;

#define ORG "XYZ"
#define DEVICE_TYPE "TestDeviceType"
#define DEVICE_ID "PNT2022TMID15088"
#define TOKEN "123"
#define speed 0.034

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot/evt/abcd_1/fmt/json";
char topic[] = "iot/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();

const int trigpin=5;
const int echopin=18;
String command;
String data="";
String lat="13.082680";
String lon="80.270721";
String name="point20";
String icon="";

long duration;
int dist;

void setup()
```

```

{
    Serial.begin(115200);
    pinMode(trigpin, OUTPUT);
    pinMode(echopin, INPUT);
    wifiConnect();
    mqttConnect();
}

void loop() {

    publishData();
    delay(500);

    if (!client.loop())
        {mqttConnect();
    }
}

void wifiConnect() {
    Serial.print("Connecting to "); Serial.print("Wifi");
    WiFi.begin("Wokwi-GUEST", "", 6);
    while (WiFi.status() != WL_CONNECTED)
        {delay(500);
        Serial.print(".");
    }
    Serial.print("WiFi connected, IP address: "); Serial.println(WiFi.localIP());
}

void mqttConnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting MQTT client to "); Serial.println(server);
        while (!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(1000);
        }
        initManagedDevice();
        Serial.println();
    }
}

void initManagedDevice() {
    if (client.subscribe(topic))
        { Serial.println(client.subscribe(topic));
        Serial.println("cmd OK");
    } else {
        Serial.println("cmd FAILED");
    }
}

void publishData()
{

```

```

digitalWrite(trigpin,LOW);
digitalWrite(trigpin,HIGH);
delayMicroseconds(10);
digitalWrite(trigpin,LOW);
duration=pulseIn(echopin,HIGH);
dist=duration*speed/2;

if(dist<100){ dis
    t=100-dist;
    icon="fa-trash";
}else{
    dist=0;
    icon="fa-trash-o";
}
DynamicJsonDocument doc(1024);
String payload;
doc["Name"]=name;
doc["Latitude"]=lat;
doc["Longitude"]=lon;
doc["Icon"]=icon;
doc["FillPercent"]=dist;
serializeJson(doc, payload);
delay(3000);
Serial.print("\n");
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish OK");
} else {
    Serial.println("Publish FAILED");
}
}

```


## Output

WOKWI SAVE SHARE Docs SIGN UP

sketch.ino diagram.json libraries.txt Library Manager

```
1 #include <WiFi.h>
2 #include <PubSubClient.h>
3 #include <ArduinoJson.h>
4
5 WiFiClient wificlient;
6
7 #define ORG "kr9fjo"
8 #define DEVICE_TYPE "TestDeviceType"
9 #define DEVICE_ID "12345"
10 #define TOKEN "V3sSC1480k1dCN3UqS"
11 #define speed 0.034
12
13 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
14 char publishTopic[] = "iot-2/evt/abcd_1/fmt/json";
15 char topic[] = "iot-2/cmd/home/fmt/String";
16 char authMethod[] = "use-token-auth";
17 char token[] = TOKEN;
18 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
19 PubSubClient client(server, 1883, wificlient);
20 void publishData();
21
22 const int trigpin=5;
23 const int echopin=18;
24 String command;
25 String data="";
26 String lat="14.167589";
27 String lon="80.248510";
28 String name="point2";
29 String icon="";
30
31 long duration;
32 int dist;
33
34 void setup()
35 {
36   Serial.begin(115200);
37   pinMode(trigpin, OUTPUT);
```

Simulation

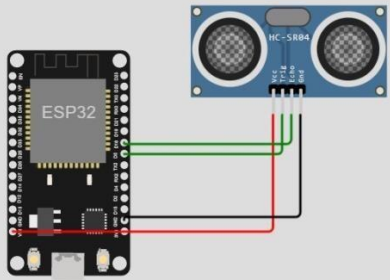

Activate Windows  
Go to Settings to activate Windows.