Assignment-4

Student Name	Ram Prasath TJ
Roll Number	92172019104122
Team ID	PNT2022TMID17431
Date	30-October 2022
Project Name	**Project -Smart farmer-IOT enabled smart Farming Application**

Question:

Write code and connections in wokwi for ultrasonic sensor.
Whenever distance is less than 100cm send "alert" to IBM cloud and display in device recent events.
Upload document with wokwi share link and images of IBM cloud.

CODE:

```
#include <WiFi.h>
#include <WiFiClient.h>
#include <PubSubClient.h>

#define ORG "17lsro"
#define DEVICE_TYPE "MyDeviceType"
#define DEVICE_ID "12345"
#define TOKEN "GkatKdiUS?UVHKvnAD"

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char pubTopic1[] = "iot-2/evt/ASHWIN KUMAR S/fmt/json";
char pubTopic2[] = "iot-2/evt/status2/fmt/json";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
const int DHT_PIN = 15;
WiFiClient wifiClient;
PubSubClient client(server, 1883, NULL, wifiClient);


#define ECHO_PIN 12
#define TRIG_PIN 13

float readDistanceCM() ;
void setup() {
  Serial.begin(115200);
  pinMode(15, OUTPUT);
  pinMode(TRIG_PIN, OUTPUT);
  pinMode(ECHO_PIN, INPUT);

  Serial.println();
    Serial.print("Connecting to ");

    WiFi.begin("Wokwi-GUEST", "", 6);
```

```cpp
  while (WiFi.status() != WL_CONNECTED) {
    delay(50);
    Serial.print(".");
  }
  Serial.println("");

  Serial.print("WiFi connected, IP address: ");
  Serial.println(WiFi.localIP());

  if (!client.connected()) {
      Serial.print("Reconnecting client to ");
      Serial.println(server);
      while (!client.connect(clientId, authMethod, token)) {
          Serial.print(".");
          delay(500);
      }
      Serial.println("Bluemix connected");
}
}

float readDistanceCM()
{
  digitalWrite(TRIG_PIN, LOW);
  delayMicroseconds(2);
  digitalWrite(TRIG_PIN, HIGH);
  delayMicroseconds(10);
  digitalWrite(TRIG_PIN, LOW);
  int duration = pulseIn(ECHO_PIN, HIGH);
  return duration * 0.034 / 2;
}
long lastMsg = 0;
void loop() {
  float distance = readDistanceCM();

  bool isNearby = distance < 100;//checking whether the distance is less than 100
  digitalWrite(15, isNearby);

  Serial.print("Measured distance: ");
  Serial.println(readDistanceCM());

  delay(100);
  if(isNearby)//Whenever the distance is less than 100 cms send an "alert" to the IBM
cloud
  {

   client.loop();
    long now = millis();
    if (now - lastMsg > 3000) {
        lastMsg = now;

        String payload = "{\"distance\":";
```

```
        payload += distance;

        payload += "}";


        Serial.print("Sending payload: ");
        Serial.println(payload);

        if (client.publish(pubTopic1, (char*) payload.c_str())) {
            Serial.println("Publish ok");
        } else {
            Serial.println("Publish failed");
        }



    }
}
}
```
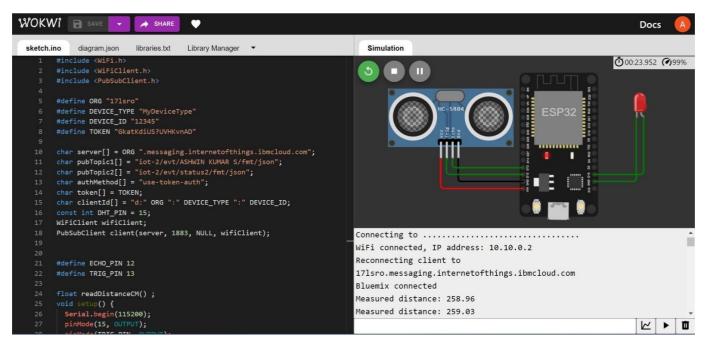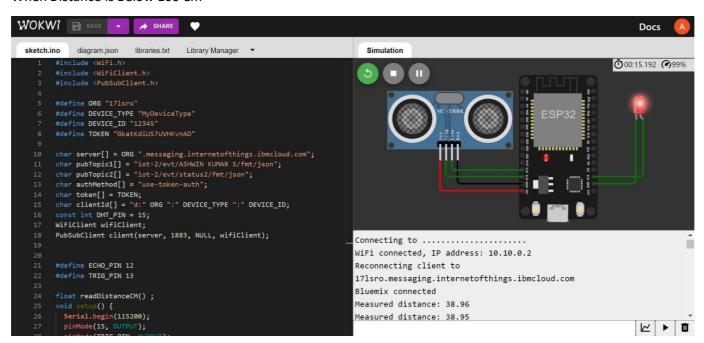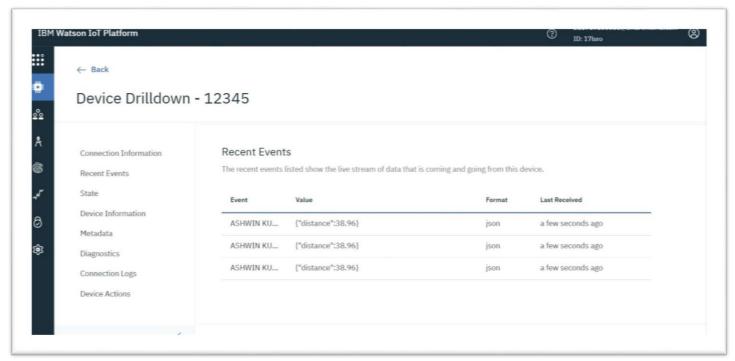
OUTPUT:

Case: 1

When Distance Is Above 100 Cm

Data Is Not Send to IBM IOT PLATFORM If Distance Is Above 100 Cm

Case:2

When Distance Is Below 100 Cm


```
1   #include <WiFi.h>
2   #include <WiFiClient.h>
3   #include <PubSubClient.h>
4
5   #define ORG "17lsro"
6   #define DEVICE_TYPE "MyDeviceType"
7   #define DEVICE_ID "12345"
8   #define TOKEN "GkatKdiUS?UVHKvnAD"
9
10  char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
11  char pubTopic1[] = "iot-2/evt/ASHWIN KUMAR S/fmt/json";
12  char pubTopic2[] = "iot-2/evt/status2/fmt/json";
13  char authMethod[] = "use-token-auth";
14  char token[] = TOKEN;
15  char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
16  const int DHT_PIN = 15;
17  WiFiClient wifiClient;
18  PubSubClient client(server, 1883, NULL, wifiClient);
19
20
21  #define ECHO_PIN 12
22  #define TRIG_PIN 13
23
24  float readDistanceCM() ;
25  void setup() {
26    Serial.begin(115200);
27    pinMode(15, OUTPUT);
```

Connecting to ....
WiFi connected, IP address: 10.10.0.2
Reconnecting client to
17lsro.messaging.internetofthings.ibmcloud.com
Bluemix connected
Measured distance: 38.96
Measured distance: 38.95

When The Distance Is Below 100Cm Data Is Sent To IBM Iot Platform