IBM ASSIGNMENT - 4

TEAM ID: PNT2022TMID26570

NAME: KT Arun pandi

ROLL NO: 212919104006

1.Write Code and connections in wokwi for ultrasonic sensor. whatever distance is less than 100 cms send "Alert" to ibm cloud aand display in device recent events.


```
Solution:
//Pins
const int TRIG_PIN = 7;
const int ECHO PIN = 8;
//Anything over 400 cm (23200 us pulse) is "out of range"
const unsigned int MAX_DIST = 23200;
void setup() {
// The Trigger pin will tell the sensor to range find
Pin Mode(TRIG_PIN, OUTPUT);
digital Write(TRIG_PIN, LOW);
//Set Echo pin as input to measure the duration of
//pulses coming back from the distance sensor
pinMode(ECHO_PIN, INPUT );
// We'll use the serial monitor to view the sensor output
```

```
Serial.begin(9600);
}
void loop() {
unsigned long t1;
unsigned long t2;
unsigned long pulse_width;
float cm;
float inches;
// Hold the trigger pin high for at least 10 us
digitalWrite(TRIG_PIN, HIGH);
delayMicroseconds(10);
digitalWrite(TRIG_PIN, LOW);
// Wait for pulse on echo pin
while (digitalRead( ECHO_PIN )==0 );
// Measure how long the echo pin was held high (pulse width)
// Note: the micros() counter will overflow after-70 min
t1= micros ();
 while (digitalRead(ECHO_PIN) == 1);
 t2 = micros();
 pulse_width = t2-t1;
// Calculate distance in centimeters and inches. The constants
//are found in the datasheet, and calculated from the assumed speed
// of sound in air at sea level (- 340m/s)
cm=pulse_Width / 58;
inches = pulse width/148.0;
```

```
// Print out results
if (pulse_width >MAX _ DIST ){
Serial.println("Out of range");
} else {
Serial.println("*******************************);
Serial.print("The Measured Distance in cm: ");
Serial.println(cm);
if( cm < 100 ){
   //while(true){
   Serial.println("Alert!!");
   //}
}
Serial.print("*******************************);
}
//wait at least 1000ms before next measurement
Delay(1000);
}
```

Output:

1.If the distance is less than 100 cms, it alerts.

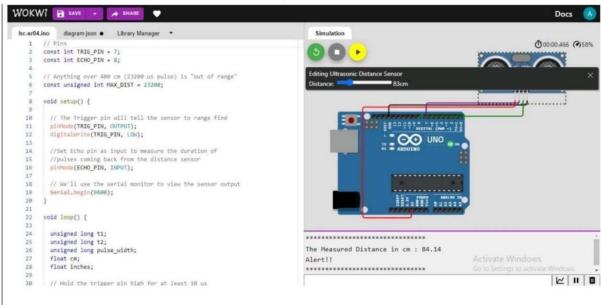

2. If the distance is more than 100 cms, it won't alert

```
WOKWI B SAVE
                                                                                                                                                                            Docs
                                                                                                Simulation
 hc-sr04.ino
             diagram.json ● Library Manager ▼
                                                                                                                                                                      Ō00:00.599 (€)62%
         const int TRIG_PIN = 7;
         const int ECHO_PIN = 8;
         // Anything over 400 cm (23200 us pulse) is "out of range"
         const unsigned int MAX_DIST = 23200;
         void setup() {
           // The Trigger pin will tell the sensor to range find
pinMode(TRIG PIN, OUTPUT);
   11
           digitalWrite(TRIG_PIN, LOW);
                                                                                                                          OO UNO
           //Set Echo pin as input to measure the duration of //pulses coming back from the distance sensor
   15
           pinMode(ECHO_PIN, INPUT);
   17
18
           // We'll use the serial monitor to view the sensor output
           Serial.begin(9600);
                                                                                                                          MONER ANALOG IN
   20
21
   22
23
         void loop() {
           unsigned long t1;
   25
           unsigned long t2;
unsigned long pulse_width;
                                                                                             The Measured Distance in cm : 227.10
                                                                                             ********************
           float cm;
float inches;
                                                                                                                                                  Activate Windows
                                                                                                                                                  Go to Settings to activate Windows
```

3. Simulation and code execution

