

Project Development - Delivery Of Sprint-2

Team ID	PNT2022TMID19051
Project Name	IOT based safety gadget for child safety monitoring and notification
Date	14-11-2022

NOTIFICATION:

This coding will make connection between IoT Device & Parent's application. When the child cross across the geofence message will be notified on parent's application.

Coding:

```
#include<WiFi.h>//library for wifi
```

```
#include<PubSubClient.h>//library for
```

```
MQTT
```

```
void callback(char* subscribe topic, byte* payload, unsigned int payload length);
```

```
//-----credentials of IBM Account-----
```

```
#define ORG "frpi8s"// IBM ORGANIZATION ID
```

```
#define DEVICE_TYPE "NodeMCU"//DEVICE TYPE MENTIONED IN IOT  
WATSON
```

```
PLATFORM #define DEVICE_ID "12345"//DEVICE ID MENTIONED IN IOT  
WATSONPLATFORM
```

```
#define TOKEN "12345678"//Token String data3;float
```

```
dist;
```

```
//-----customize the above value-----
```

```
char server [] =ORG ".messaging.internetofthings.ibmcloud.com";//servername
```

```
char publish topic[]="ultrasonic/evt/Data/fmt/json";//*topic name andtype  
of event perform and format
```

```
in which data to be send*/
```

```
char subscribetopic[]="ultrasonic/cmd/test/fmt/String";//*cmd REPRESENT  
Command tupe and
```

```
COMMAND IS TEST OF FORMAT STRING*/
```

```
char authMethod[]="use-token-auth";//authentication method char  
token[]=TOKEN;
```

```
char clientid[]="d:" ORG ":" DEVICE_TYPE":" DEVICE_ID;//CLIENT ID  
//
```

```
WiFiClient wifiClient;// creating an instance for wificlient
```

```
PubSubClient client(server, 1883 , callback , wifiClient);//*calling the predefined  
client id by passing parameter like server id,portand wificredential*/
```

```
int LED =4;
```

```
int trig =5; int echo=18; void setup(){
```

```
Serial.begin(115200); pinMode(trig,OUTPUT); pinMode(echo,INPUT);
```

```
pwmWrite(LED,0); delay(10); Serial.println(); wificonnect(); mqttconnect();
```

```
void loop() { digitalWrite(trig,LOW); digitalWrite(trig,HIGH);
```

```
delayMicroseconds(10); digitalWrite(trig,LOW);
```

```
float dur=pulseIn(echo,HIGH); float dist=(dur * 0.0343)/2; Serial.print("distance in  
cm"); Serial.println(dist); PublishData(dist);
```

```
delay(1000);
```

```
if (!client.loop()){ mqttconnect();
```

```
}
```

```
}
```

```
/* .....retriving to cloud. ....
```

```
*/
```

```
void PublishData(float dist){ mqttconnect();//function call for connecting to ibm
```

```
/*creating the string in form of JSON to update the data to ibm cloud*/ String
```

```
object;
```

```

        if(dist<100)
        {
            digitalWrite(LED,HIGH); Serial.println("no object is near");
object="Near";
        }
        else
        {
            digitalWrite(LED,LOW); Serial.println("no object found"); object="No";
        }
        String payload="{\"distance\":"; payload +=dist;
        payload +=",\" \"object\":\":"; payload += object;
        payload += "\":";
        Serial.print("Sending payload: ");
        Serial.println(payload);

        if(client.publish(publishtopic, (char*) payload.c_str())){
            Serial.println("Publish ok");/* if its sucessfully upload data on the
cloud then it will print publish ok in serial monitor or else it will print publish
failed*/
        } else{
            Serial.println("Publish failed");
        }
    }
    void mqttconnect(){ if(!client.connected()){

Serial.print("Reconnecting client to "); Serial.println(server);
while(!!!client.connect(clientid,authMethod,
token)){ Serial.print("."); delay(500);
    }

    initManagedDevice();
Serial.println();
    }
}
void wificonnect()//function defenition for wificonnect
{
    Serial.println(); Serial.print("Connecting to ");


```

```


WiFi.begin("vivo 1816", "taetae95",6);//PASSING THE WIFI CREDENTIALS TO
ESTABLISH CONNECTION
while (WiFi.status() !=WL_CONNECTED){ delay(500);
    Serial.print(".");
}
    Serial.println(""); Serial.println("WiFi connected"); Serial.println("IP
address");
    Serial.println(WiFi.localIP());
}
void initManagedDevice(){ if(client.subscribe(subscribetopic)){
    Serial.println((subscribetopic)); Serial.println("subscribe to cmd OK");
}else{
    Serial.println("subscribe to cmd failed");
}
}
void callback(char* subscribetopic,byte*payload,unsigned int payloadLength)
{
    Serial.print("callback invoked for topic: ");
    Serial.println(subscribetopic); for(int i=0; i< payloadLength; i++){
        //Serial.print((char)payload[i]); data3 +=(char)payload[i];
    }
    //Serial.println("dta: "+ data3);
    //if(data3=="Near")
    //{
    //Serial.println(data3);
    //digitalWrite(LED,HIGH);
    //}
    //else //{
    //Serial.println(data3);
    //digitalWrite(LED,LOW);//} data3="";
}

```

SCHEMATIC DIAGRAM:

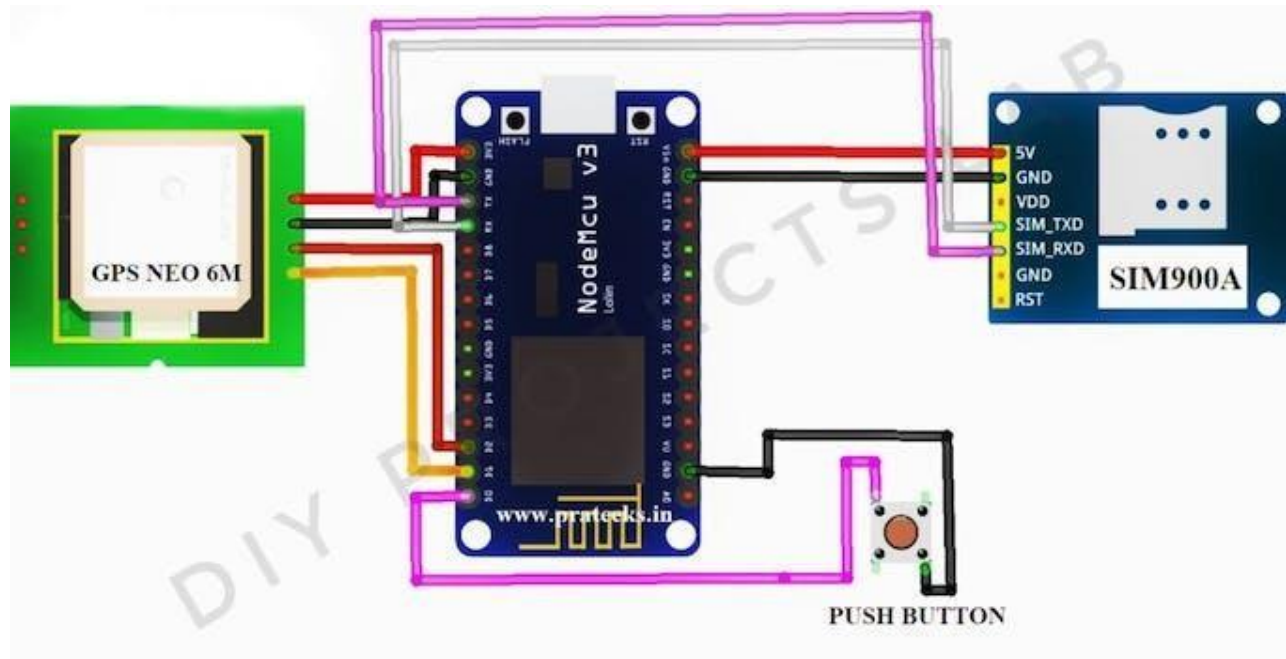

OUTPUT:

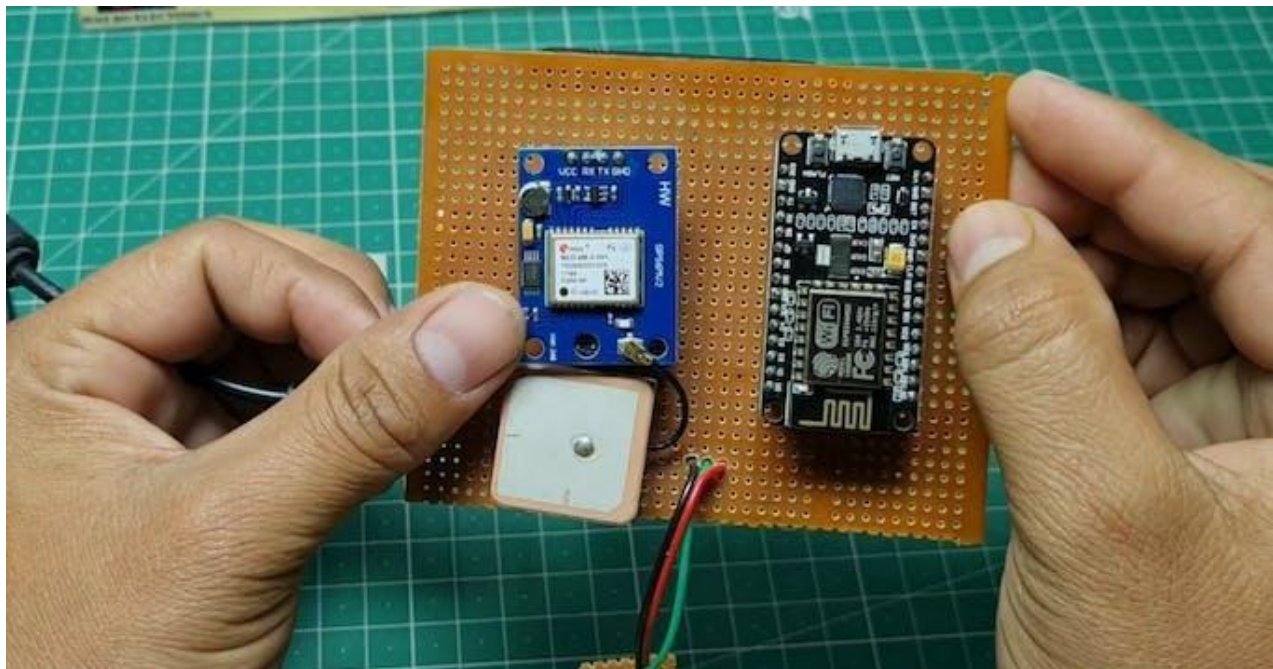

← Back

Device Drilldown - 12345

Device Credentials

Connection Information

Recent Events

State

Device Information

Metadata

Diagnostics

Connection Logs

Device Actions

Device Credentials

You registered your device to the organization. Add these credentials to the device to connect it to the platform. After the device is connected, you can navigate to view connection and event details.

Organization ID	frpi8s
Device Type	NodeMCU
Device ID	12345
Authentication Method	use-token-auth
Authentication Token	12345678

⚠

Authentication tokens are non-recoverable. If you misplace this token, you will need to re-register the device to generate a new authentication token.

Find out how to add these credentials to your device

➔

Browse Action Device Types Interfaces
Add Device +

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
data	{"Warning":28.95}	json	a few seconds ago
data	{"Warning":28.95}	json	a few seconds ago
data	{"Warning":49.98}	json	a minute ago
data	{"Warning":49.98}	json	a minute ago
data	{"Warning":11.03}	json	a minute ago