## **PROJECT REPORT**

# IOT BASED SMART CROP PROTECTION SYSTEM FOR AGRICULTURE

**TEAM ID: PNT2022TMID13642** 

TEAM LEADER: Venkatesh

TEAM MEMBER 1 :Raja Durai TEAM MEMBER 2 : Ram Kumar TEAM MEMBER 3 : Sathish Kumar

TEAM MEMBER 4: Muthuraj

## TABLE OF CONTENTS

1	INTRODUCTION	3
	OVERVIEW	3
	PURPOSE	
2	LITERATURE SURVEY	4
	EXISTING PROBLEM	
	PROPOSED SOLUTION	
3	THEORITICAL ANALYSIS	5
	BLOCK DIAGRAM	5
	HARDWARE / SOFTWARE DESIGNING	
4	EXPERIMENTAL INVESTIGATION	
5	FLOWCHART	9
6	RESULT	10
7	ADVANTAGES & DISADVANTAGES	10
	ADVANTAGES	
	DISADVANTAGES	
8	APPLICATIONS	10
9	CONCLUSION	11
	FUTURE SCOPE	
	1 BIBLIOGRAPHY	
	2 APPENDIX_	12
	A. SOURCE CODE	
	B. NODE-RED FLOW	13

## 1 INTRODUCTION:

#### **OVERVIEW**

This is a Smart Agriculture System project based on Internet Of Things (IoT), that can measure soil moisture and temperature conditions for agriculture using Watson IoT services. IoT is network that connects physical objects or things embedded with electronics, software and sensors through network connectivity that collects and transfers data using cloud for communication. Data is transferred through internet without human to human or human to computer interaction.

In this project we have not used any hardware. Instead of real soil and temperature conditions, sensors IBM IoT Simulator is used which can transmit soil moisture temperature as required.

- ➤ **Project requirements**: Node-RED, IBM Cloud, IBM Watson IoT, Node.js, IBM Device, IBM IoT Simulator, Python 3.7, Open Weather API platform.
- > **Project Deliverables**: Application for IoT based Smart Agriculture System

#### **PURPOSE**

IoT based farming improves the entire agriculture system by monitoring the field in real-time. With the help of IoT in agriculture not only saves the time but also reduces the extravagant use of resources such as water and electricity.

Sometimes due to over or less supply of water in the agricultural field crops may not grow proper. Using IoT supply of water and growth of plants can be satisfied to a greater extent. The flow of water can be controlled from the application.

### 1.2.1 SCOPE OF WORK

- > Create a device in IBM Cloud Account.
- ➤ Install Node-RED and configure the nodes that we want to use in the project.
- > Create the open weather map account and get the API key and the weather conditions using API key in the Node-RED.
- > Create a web application for user interaction for observation and control actions.

## **2** LITERATURE SURVEY:


#### **EXISTING PROBLEM**

- In agriculture water is needed for the crops for their growth. If the Soil gets dry it is necessary to supply water. But sometime if the farmer doesn't visit the field, it is not possible to know the condition of soil.
- Sometimes over supply of water or less supply of water affects the growth of crops.
- Sometimes if the weather/temperature changes suddenly it is necessary to take certain actions.
- Specific crops grow better in specific conditions, they may get damaged due to bad weather.

#### PROPOSED SOLUTION

- Soil Moisture can be checked by using the sensors that can sense the soil condition and send the moisture content in the soil over the cloud services to the web application.
- The supply of water can be controlled from anywhere by controlling the motor state (ON/OFF), using web application.
- Surrounding temperature can also be sensed by the sensors and displayed on the application.
- Real time weather conditions can also be known by using different weather APIs from different websites and displayed on our application.

## 3 THEORITICAL ANALYSIS: BLOCK DIAGRAM

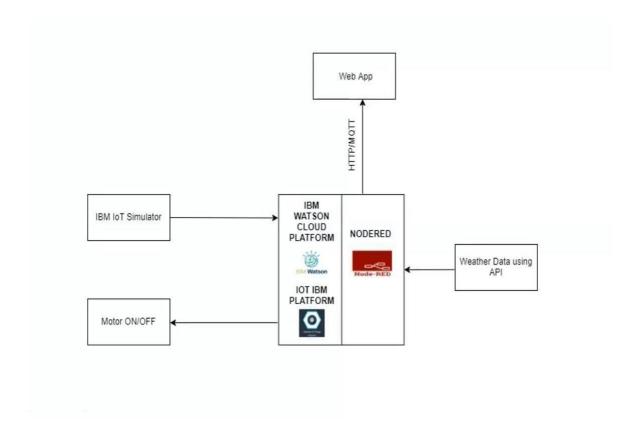


## Hardware / Software Designing

- 1. Create a device in IBM Cloud.
- 2. Connect the device to IBM Simulator to get the weather conditions.
- 3. Build Node-RED flow to build a web application to display the weather conditions and control the devices.
- 4. Get the real time weather condition data from open weather map and integrate it in the Node-RED.
- 5. Control the working of the web application to the devices by python coding.


## 4 EXPERIMENTAL INVESTIGATION:

12:06 AM   1.1KB/s 🏵 🗘	النه <sup>4G</sup> النه	<b>♠</b> 74 +
Crop Production Sy	stem	:
Temperature	96	_
Humidity	11	
Soil Moisture	58	


FIG(A) WATSON IOT SIMULATOR

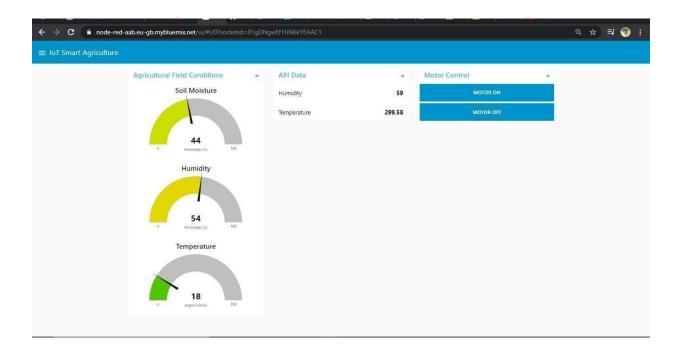

FIG(B1) WEB APPLICATION

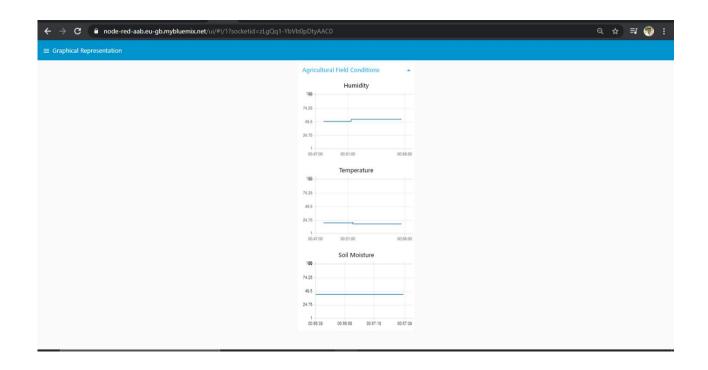

FIG(B2) WEB APPLICATION - TAB 2

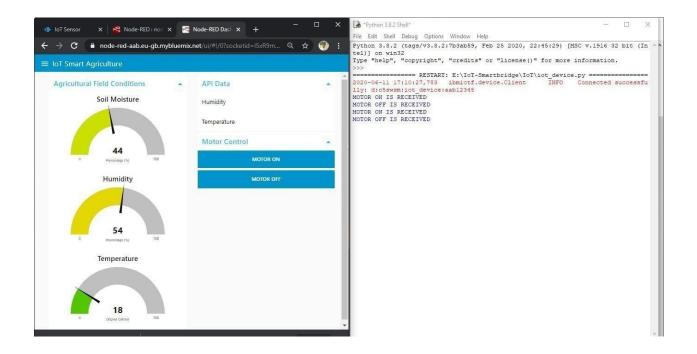


## FIG(C) DEVICE CONTROL ACTION

In this project we send the weather data through IoT Simulator shown in fig(a) instead of real soil and temperature conditions. Simulator passes the data through IBM Cloud to the web application. The data is displayed on the Dash board show in fig (b1 & b2). Web Application is build using Node-RED. We have created 2 tabs:

- 1. IoT Smart Agriculture.
- 2. Graphical Representation.

Web Application is also used to control the devices further like motor, pumps, lights, or any other devices in the agricultural field. In this project the output is passed using python code and the control action is displayed in python code console window in fig(c).

## **5** FLOWCHART:

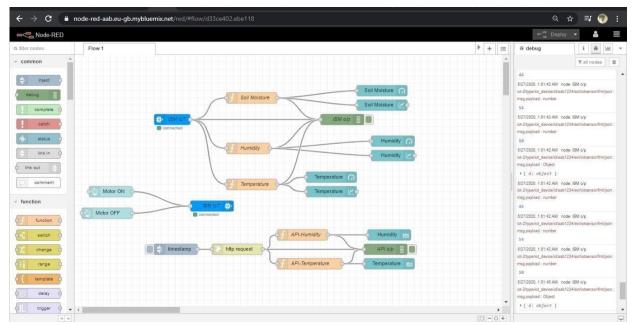

## Following are the nodes used in the project in the Web Application:

- 1. IBM IoT: IN and OUT Nodes.
- 2. function Nodes.
- 3. Gauge Nodes.
- 4. Chart Nodes.
- 5. Debug Node.
- 6. Button Nodes.

## Following are the nodes used for the weather condition from open weather map:

- 1. Timestamp Node.
- 2. http request Node
- 3. Function Nodes.
- 4. Text Nodes.
- 5. Debug Node

## 6 RESULT:

We have successfully build a web based UI and integrated all the services using Node-RED.

Web Application : <a href="https://node-red-aab.eu-gb.mybluemix.net/ui/">https://node-red-aab.eu-gb.mybluemix.net/ui/</a>

### 7 ADVANTAGES & DISADVANTAGES:

#### **ADVANTAGES**

- All the data like climatic conditions and changes in them, soil or crop conditions everything can be easily monitored.
- Risk of crop damage can be lowered to a greater extent.
- Many difficult challenges can be avoided making the process automated and the quality of crops can be maintained.
- The process included in farming can be controlled using the web applications from anywhere, anytime.

#### **DISADVANTAGES:**

- Smart Agriculture requires internet connectivity continuously, but rural parts cannot fulfill this requirement.
- Any faults in the sensors can cause great loss in the agriculture, due to wrong records and the actions of automated processes.
- IoT devices need much money to implement.

## **8** APPLICATIONS:

- Precision Farming that is farming processes can be made more controlled and accurate.
- Live monitoring can be done of all the processes and the conditions on the agricultural field.
- All the controls can be made just on the click.
- Quality can be maintained.

## 9 **CONCLUSION:**

A IoT Web Application is built for smart agricultural system using Watson IoT platform, Watson simulator, IBM cloud and Node-RED.

## **10 FUTURE SCOPE:**

In future due to more demand of good and more farming in less time, for betterment of the crops and reducing the usage of extravagant resources like electricity and water IoT can be implemented in most of the places.

## A. SOURCE CODE MOTOR.PY

```
import time
import sys
import ibmiotf.application # to install pip install ibmiotf
import ibmiotf.device
# Provide your IBM Watson Device Credentials
organization = "8gyz7t" # replace the ORG ID
deviceType = "weather monitor" # replace the Device type
deviceId = "b827ebd607b5" # replace Device ID
authMethod = "token"
authToken = "LWVpQPaVQ166HWN48f" # Replace the authtoken
def myCommandCallback(cmd): # function for Callback
  if cmd.data['command'] == 'motoron':
    print("MOTOR ON IS RECEIVED")
  elif cmd.data['command'] == 'motoroff':
    print("MOTOR OFF IS RECEIVED")
  if cmd.command == "setInterval":
    if 'interval' not in cmd.data:
       print("Error - command is missing required information: 'interval'")
    else:
       interval = cmd.data['interval']
  elif cmd.command == "print":
    if 'message' not in cmd.data:
       print("Error - command is missing required information: 'message'")
```

```
else:
      output = cmd.data['message']
      print(output)
try:
  deviceOptions = {"org": organization, "type": deviceType, "id": deviceId, "auth-
method": authMethod.
            "auth-token": authToken}
  deviceCli = ibmiotf.device.Client(deviceOptions)
# .....
except Exception as e:
  print("Caught exception connecting device: %s" % str(e))
  sys.exit()
# Connect and send a datapoint "hello" with value "world" into the cloud as an event of
type "greeting" 10 times
deviceCli.connect()
while True:
  deviceCli.commandCallback = myCommandCallback
# Disconnect the device and application from the cloud
deviceCli.disconnect()
```

#### **SENSOR.PY**

import time import sys import ibmiotf.application import ibmiotf.device import random

```
# Provide your IBM Watson Device Credentials
organization = "8gyz7t" # replace the ORG ID
deviceType = "weather monitor" # replace the Device type
deviceId = "b827ebd607b5" # replace Device ID
authMethod = "token"
authToken = "LWVpQPaVQ166HWN48f" # Replace the authtoken
def myCommandCallback(cmd):
  print("Command received: %s" % cmd.data['command'])
  print(cmd)
try:
       deviceOptions = {"org": organization, "type": deviceType, "id": deviceId,
"auth-method": authMethod, "auth-token": authToken}
       deviceCli = ibmiotf.device.Client(deviceOptions)
       #.....
except Exception as e:
      print("Caught exception connecting device: %s" % str(e))sys.exit()
# Connect and send a datapoint "hello" with value "world" into the cloud as an event of
type "greeting" 10 times
deviceCli.connect()
while True:
    temp=random.randint(0,100)
    pulse=random.randint(0,100)
    soil=random.randint(0,100)
    data = { 'temp' : temp, 'pulse': pulse, 'soil':soil}
```

```
#print data
  def myOnPublishCallback():
    print ("Published Temperature = %s C" % temp, "Humidity = %s %%" %
pulse,"Soil Moisture = %s %%" % soil,"to IBM Watson")

success = deviceCli.publishEvent("IoTSensor", "json", data, qos=0,
on_publish=myOnPublishCallback)
  if not success:
    print("Not connected to IoTF")
    time.sleep(1)

deviceCli.commandCallback = myCommandCallback

# Disconnect the device and application from the cloud
deviceCli.disconnect()
```

## **B.** Node-RED FLOW:

```
{ "id":"625574ead9839b34 ",

"type":"ibmiotout",

"z":"630c8601c5ac3295",

"authentication":"apiKey",

"apiKey":"ef745d48e395ccc0",

"outputType":"cmd",

"deviceId":"b827ebd607b5",

"deviceType":"weather_monitor",

"eventCommandType":"data",

"format":"json",

"data":"data", "qos":0,

"name":"IBM IoT",

"service":"registered",
```

```
"x":680,
"y":220,
"wires":[]
},
"id":"4cff18c3274cccc4",
"type":"ui button",
"z":"630c8601c5ac3295",
"name":"",
"group":"716e956.00eed6c",
"order":2,
"width":"0",
"height":"0",
"passthru":false,
"label":"MotorON",
"tooltip":"",
"color":"",
"bgcolor":"",
"className":"",
"icon":"",
"payload":"{\"command\":\"motoron\"}",
"payloadType":"str",
"topic":"motoron",
"topicType":"str",
"x":360,
"y":160,
"wires":[["625574ead9839b34"]]},
"id":"659589baceb4e0b0",
"type":"ui_button",
"z":"630c8601c5ac3295",
"name":"",
"group":"716e956.00eed6c",
"order":3,
```

```
"width":"0",
"height":"0",
"passthru":true,
"label":"MotorOFF",
"tooltip":"",
"color":"",
"bgcolor":"",
"className":"",
"icon":"",
"payload":"{\"command\":\"motoroff\"}",
"payloadType":"str",
"topic": "motoroff",
"topicType":"str",
"x":350,
"y":220,
"wires":[["625574ead9839b34"]]},
{"id":"ef745d48e395ccc0",
"type":"ibmiot",
"name":"weather_monitor",
"keepalive":"60",
"serverName":"",
"cleansession":true,
"appId":"",
"shared":false},
{"id":"716e956.00eed6c",
"type":"ui group",
"name":"Form",
"tab": "7e62365e.b7e6b8",
"order":1,
"disp":true,
"width":"6",
"collapse":false},
{"id":"7e62365e.b7e6b8",
"type":"ui tab",
```

```
"name":"contorl",
"icon": "dashboard",
"order":1,
"disabled":false,
"hidden":false}
"id":"b42b5519fee73ee2",
"type":"ibmiotin",
"z":"03acb6ae05a0c712",
"authentication": "apiKey",
"apiKey":"ef745d48e395ccc0",
"inputType":"evt",
"logicalInterface":"",
"ruleId":"",
"deviceId":"b827ebd607b5",
"applicationId":"",
"deviceType":"weather monitor",
"eventType":"+",
"commandType":"",
"format":"json",
"name":"IBMIoT",
"service": "registered",
"allDevices":"",
"allApplications":"",
"allDeviceTypes":"",
"allLogicalInterfaces":"",
"allEvents":true,
"allCommands":"",
"allFormats":"",
"qos":0,
```

```
"x":270,
"y":180,
"wires":[["50b13e02170d73fc","d7da6c2f5302ffaf","a949797028158f3f","a71f164bc3
78bcf1"]]
},
{ "id":"50b13e02170d73fc
"type":"function",
"z":"03acb6ae05a0c712",
"name": "Soil Moisture",
"func": "msg.payload = msg.payload.soil; \nglobal.set('s', msg.payload); \nreturn msg; ",
"outputs":1,
"noerr":0,
"initialize":"",
"finalize":"",
"libs":[],
"x":490,
"y":120,
"wires":[["a949797028158f3f","ba98e701f55f04fe"]]
},
"id":"d7da6c2f5302ffaf",
"type":"function",
"z":"03acb6ae05a0c712",
"name":"Humidity",
"func": "msg.payload = msg.payload.pulse; \nglobal.set('p',msg.payload) \nreturn msg;",
"outputs":1,
"noerr":0,
"initialize":"",
"finalize":"",
"libs":[],
"x":480,
"y":260,
"wires":[["a949797028158f3f","70a5b076eeb80b70"]]
```

```
},
{ "id":"a949797028158f3f
"type": "debug",
"z":"03acb6ae05a0c712",
"name":"IBMo/p",
"active":true,
"tosidebar":true,
"console":false,
"tostatus":false,
"complete": "payload",
"targetType":"msg",
"statusVal":"",
"statusType":"auto",
"x":780,
"y":180,
"wires":[]
},
"id":"70a5b076eeb80b70",
"type":"ui gauge",
"z":"03acb6ae05a0c712",
"name":"",
"group":"f4cb8513b95c98a4",
"order":6,
"width":"0",
"height":"0",
"gtype":"gage",
"title":"Humidity",
"label": "Percentage(%)",
"format":"{{value}}",
"min":0,
"max":"100",
"colors":["#00b500","#e6e600","#ca3838"],
```

```
"seg1":"",
"seg2":"",
"className":"",
"x":860,
"y":260,
"wires":[]
},
"id":"a71f164bc378bcf1",
"type":"function",
"z":"03acb6ae05a0c712",
"name": "Temperature",
"func": "msg.payload=msg.payload.temp;\nglobal.set('t',msg.payload);\nreturn msg;",
"outputs":1,
"noerr":0,
"initialize":"",
"finalize":"",
"libs":[],
"x":490,
"y":360,
"wires":[["8e8b63b110c5ec2d","a949797028158f3f"]]
},
"id":"8e8b63b110c5ec2d",
"type":"ui gauge",
"z":"03acb6ae05a0c712",
"name":"",
"group":"f4cb8513b95c98a4",
"order":11,
"width":"0",
"height":"0",
"gtype":"gage",
"title": "Temperature",
"label": "DegreeCelcius",
```

```
"format":"{{value}}",
"min":0,
"max":"100",
"colors":["#00b500","#e6e600","#ca3838"],
"seg1":"",
"seg2":"",
"className":"",
"x":790,
"y":360,
"wires":[]
},
"id":"ba98e701f55f04fe",
"type":"ui gauge",
"z":"03acb6ae05a0c712",
"name":"",
"group":"f4cb8513b95c98a4",
"order":1,
"width":"0",
"height":"0",
"gtype":"gage",
"title": "Soil Moisture",
"label": "Percentage(%)",
"format":"{{value}}",
"min":0,
"max":"100",
"colors":["#00b500","#e6e600","#ca3838"],
"seg1":"",
"seg2":"",
"className":"",
"x":790,
"y":120,
"wires":[]
},
```

```
{
"id": "a259673baf5f0f98",
"type":"httpin",
"z":"03acb6ae05a0c712",
"name":"",
"url":"/sensor",
"method":"get",
"upload":false,
"swaggerDoc":"",
"x":370,
"y":500,
"wires":[["18a8cdbf7943d27a"]]
},
"id":"18a8cdbf7943d27a",
"type":"function",
"z":"03acb6ae05a0c712",
"name": "httpfunction",
"func": "msg.payload \' : global.get('p'), ''temp'' : global.get('t'), ''soil'' : global.get('s') \};
\nreturn msg;",
"outputs":1,
"noerr":0,
"initialize":"",
"finalize":"",
"libs":[],
"x":630,
"y":500,
"wires":[["5c7996d53a445412"]]
},
{ "id":"5c7996d53a445412
"type":"httpresponse",
"z":"03acb6ae05a0c712",
"name":"",
```

```
"statusCode":"",
"headers":{},
"x":870,
"y":500,
"wires":[]
},
"id":"ef745d48e395ccc0",
"type":"ibmiot",
"name":"weather monitor",
"keepalive":"60",
"serverName":"",
"cleansession":true,
"appId":"",
"shared":false},
"id":"f4cb8513b95c98a4",
"type":"ui group",
"name":"monitor",
"tab":"1f4cb829.2fdee8",
"order":2,
"disp":true,
"width":"6",
"collapse":false,
"className":""
},
"id":"1f4cb829.2fdee8",
"type":"ui tab",
"name":"Home",
"icon": "dashboard",
"order":3,
"disabled":false,
"hidden":false }
```