
ASSIGNMENT-1

SANTHOSH G

73151921044

K.S.R. COLLEGE OF ENGINEERING

Screenshot:

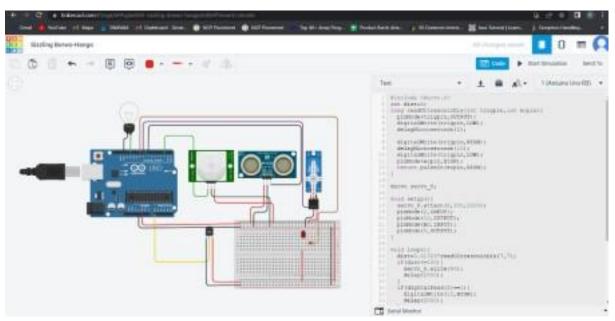

Code:

#include <Servo.h>

int dist=0;

long readUltrasonicDis(int trigpin,int ecpin){

pinMode(trigpin,OUTPUT);

digitalWrite(trigpin,LOW);

delayMicroseconds(2);

digital Write (trigpin, HIGH);

delayMicroseconds(10);

digitalWrite(trigpin,LOW);

pinMode(ecpin,HIGH);

```
return pulseIn(ecpin,HIGH);
Servo servo_8;
void setup(){
servo_8.attach(8,500,2500)
; pinMode(2,INPUT);
pinMode(12,OUTPUT);
pinMode(A0,INPUT);
pinMode(9,OUTPUT);
}
void loop(){
dist=0.01723*readUltrasonicDis(7,7)
; if(dist<=100){
servo_8.write(90);
delay(2000);
if(digitalRead(2)==1){
digitalWrite(12,HIGH);
delay(2000);
}
else{
digitalWrite(12,LOW);
delay(2000);
}
if(analogRead(A0)>200){
digitalWrite(9,HIGH);
delay(2000);
}
```

```
else{
digitalWrite(9,LOW);
delay(2000)
; }
}
```