
CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient;
#define ORG "nhpwjc"
#define DEVICE_TYPE "NodeMCU"
#define DEVICE_ID "USE YOUR ID"
#define TOKEN "USE YOUR TOKEN"
#define speed 0.034
 char server[] =
ORG
".messaging.internetofthings.ibmcloud.com"; char
publishTopic[] = "iot-2/evt/Data/fmt/json"; char topic[] =
"iot-2/cmd/home/fmt/String"; char authMethod[] = "usetoken-
auth"; char token[] = TOKEN; char clientId[] = "d:" ORG ":"
DEVICE_TYPE ":" DEVICE_ID; PubSubClient client(server,
1883, wifiClient); void publishData();
trigpin=5;
const int echopin=18;
String command;
String data="";
long
duration;
float dist;
void
setup()
  Serial.begin(115200); pinMode(trigpin,
 OUTPUT);
```


```
pinMode(echopin,
                 INPUT); wifiConnect(); mqttConnect();
                loop()
      void
                            {
 publishData(); delay(500);
 if (!client.loop()) {
mqttConnect(); } }
void wifiConnect() {
 Serial.print("Connecting to "); Serial.print("Wifi");
 WiFi.begin("Wokwi-GUEST", "", 6); while (WiFi.status() !=
 WL_CONNECTED) { delay(500);
 Serial.print("."); }
 Serial.print("WiFi connected, IP address: "); Serial.println(WiFi.localIP());
void mqttConnect() { if
  (!client.connected()) {
   Serial.print("Reconnecting MQTT client to "); Serial.println(server); while
     (!client.connect(clientId,
                                 authMethod, token)) { Serial.print(".");
   delay(500);
    } initManagedDevice();
 Serial.println(); } }
void initManagedDevice() { if
  (client.subscribe(topic)) {
    // Serial.println(client.subscribe(topic)); Serial.println("subscribe to cmd
 } else {
   Serial.println("subscribe to cmd FAILED"); } }
void publishData()
{ digitalWrite(trigpin,LOW);
 digitalWrite(trigpin,HIGH);
```


```
delayMicroseconds(10); digitalWrite(trigpin,LOW);
    duration=pulseIn(echopin,HIGH); dist=duration*speed/2; if(dist<100){
        String payload = "{\"Alert distance\":"; payload += dist; payload += "}";
        Serial.print("\n");
        Serial.print("Sending payload: "); Serial.println(payload); if
            (client.publish(publishTopic, (char*) payload.c_str()))
        Serial.println("Publish OK");
    } else {
            Serial.println("Publish FAILED"); }
}</pre>
```

CONNECTIONS:

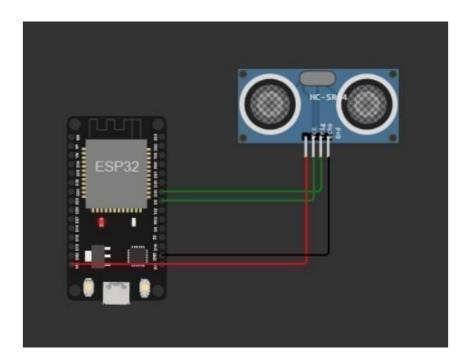

OUTPUT:

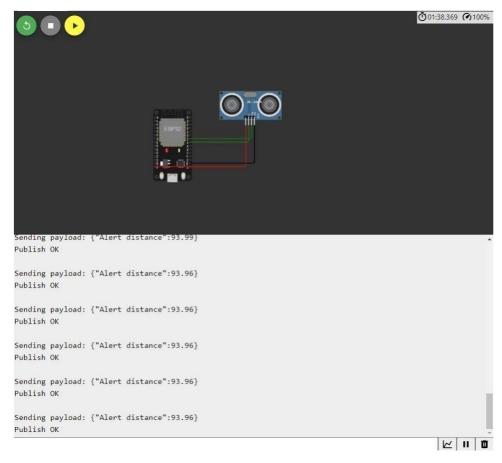

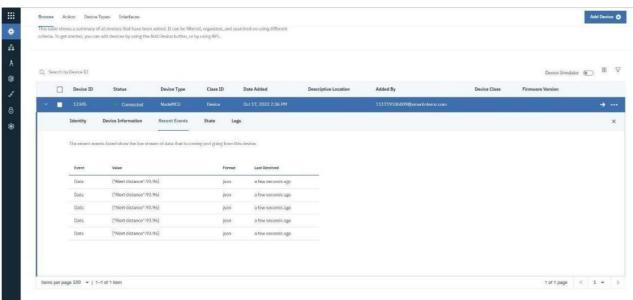

WOKWI LINK - https://wokwi.com/projects/346405970317935188