## **ASSIGNMENT 4**

Date	03 NOV 2022
Name	A.ARSHITHA
Team ID	PNT2022TMID34110
Project Name	SmartFarmer – IoT Enabled Smart Farming
	Application

# **QUESTION:**

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events. Upload document with wokwi share link and images of ibm cloud


#### **CODE:**

```
#include <WiFi.h>
#include <PubSubClient.h> WiFiClient wifiClient;
#define ORG "nhpwjc"
#define DEVICE_TYPE "NodeMCU"
#define DEVICE_ID "USE YOUR ID"
#define TOKEN "USE YOUR TOKEN"
#define speed 0.034
char server[] = ORG
".messaging.internetofthings.ibmcloud.com"; char
publishTopic[] = "iot-2/evt/Data/fmt/json"; char
2/cmd/home/fmt/String"; char authMethod[] = "use-token- auth"; char
token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient); void publishData();
 const int trigpin=5;
const int echopin=18;
String command;
String data=""; long
duration;
float dist;
 setup()
  Serial.begin(115200); pinMode(trigpin,
  OUTPUT);
```

```
pinMode(echopin, INPUT); wifiConnect();
  mqttConnect();
  void loop() { publishData();
  delay(500);
  if (!client.loop()) { mqttConnect(); }
void wifiConnect() {
  Serial.print("Connecting to "); Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6); while (WiFi.status() !=
  WL_CONNECTED) { delay(500);
    Serial.print(".");
  Serial.print("WiFi connected, IP address: "); Serial.println(WiFi.localIP());
void mattConnect() { if
  (!client.connected()) {
     Serial.print("Reconnecting MQTT client to "); Serial.println(server); while
    (!client.connect(clientId, authMethod, token)) { Serial.print("."); delay(500);
    initManagedDevice(); Serial.println(); } }
          initManagedDevice()
void
  (client.subscribe(topic)) {
    // Serial.println(client.subscribe(topic)); Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe
                                           FAILED"); } void
                                    cmd
publishData()
 digitalWrite(trigpin,LOW); digitalWrite(trigpin,HIGH);
```

```
delayMicroseconds(10); digitalWrite(trigpin,LOW);
duration=pulseIn(echopin,HIGH); dist=duration*speed/2;
if(dist<100){
    String payload = "{\"Alert distance\":"; payload += dist; payload
    += "}"; Serial.print("\n");
    Serial.print("Sending payload: ");
    Serial.println(payload);
    if (client.publish(publishTopic, (char*) payload.c_str())) { Serial.println("Publish OK");
    } else {
        Serial.println("Publish FAILED");
    }
}</pre>
```

### **CONNECTIONS:**

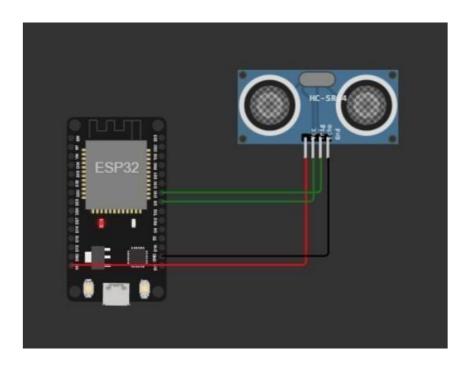

### **OUTPUT:**

