
IBM-Nalaiya Thiran Project Assignment 1-Smart Home

- Sobha K S
- 960219106128

CIRCUIT DIAGRAM:

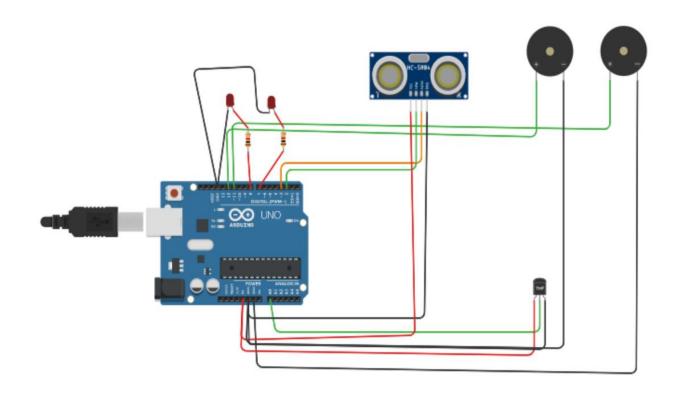

SOURCE CODE:

```
int t=2;
int e=3;
void setup()
{
    Serial.begin(9600);
    pinMode(t,OUTPUT);
    pinMode(e,INPUT);
```

```
pinMode(12,OUTPUT);
void loop()
{
//ultrasonic sensor
digitalWrite(t,LOW);
digitalWrite(t,HIGH);
delayMicroseconds(10);
digitalWrite(t,LOW);
float dur=pulseIn(e,HIGH);
float dis=(dur*0.0343)/2;
Serial.print("Distance is: ");
Serial.println(dis);
//LED ON
if(dis>=60)//(in terms of centimeter)
{
digitalWrite(8,HIGH);
digitalWrite(7,HIGH);
}
//Buzzer For ultrasonic Sensor
if(dis>=60)
for(int i=0; i<=5; i=i+1)
{
```

```
tone(12,i);
delay(1000);
noTone(12);
delay(1000);
}
//Temperate Sensor
double a= analogRead(A0);
double t=(((a/1024)*5)-0.5)*100;
Serial.print("Temp Value: ");
Serial.println(t);
delay(1000);
//LED ON
if(t>=20)//(in\ terms\ of\ celsius)
digitalWrite(8,HIGH);
digitalWrite(7,HIGH);
}
//Buzzer for Temperature Sensor
```

```
if(t>=20)
for(int i=0; i<=5; i=i+1)
{
tone(12,i);
delay(1000);
noTone(12);
delay(1000);
}
//LED OFF
if(t<20)
digitalWrite(8,LOW);
digitalWrite(7,LOW);
}
```

TINKERCAD LINK:

 $\underline{https://www.tinkercad.com/things/0IHePAjgL5O-neat-amur-wluff/editel}$

OUTPUT:

