Assignment -4


Assignment Date	November 2022
Student Name	Naveen Kumar A
Student Roll Number	611219106051
Maximum Marks	2 Marks

Question:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events. Upload document with wokwi share link and images of ibm cloud.

Solution:

Wokwi link: https://wokwi.com/projects/347013031284179538

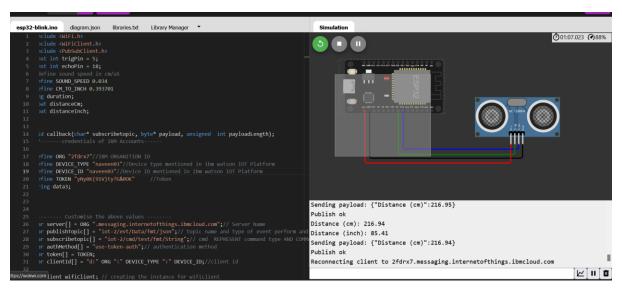

```
#include <WiFiClient.h>
#include <PubSubClient.h>
const int trigPin = 5;
const int echoPin = 18;
//define sound speed in cm/uS
#define SOUND_SPEED 0.034
#define CM_TO_INCH 0.393701
long duration;
float distanceCm;
float distanceInch;
```

```
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
//----credentials of IBM Accounts-----
#define ORG "2fdrx7"//IBM ORGANITION ID
#define DEVICE_TYPE "naveen03"//Device type mentioned in ibm watson IOT
Platform
#define DEVICE_ID "naveen03"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "yNy0K(91V)ty?G&0OK" //Token
String data3;
//----- Customise the above values ------
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of
event perform and format in which data to be send
char subscribetopic[] = "iot-2/cmd/test/fmt/String";// cmd REPRESENT command
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE ID;//client id
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient);
void setup() {
  Serial.begin(115200); // Starts the serial communication
  pinMode(trigPin, OUTPUT); // Sets the trigPin as an Output
  pinMode(echoPin, INPUT); // Sets the echoPin as an Input
  Serial.println();
 wificonnect();
 mqttconnect();
void loop() {
  // Clears the trigPin
 digitalWrite(trigPin, LOW);
  delayMicroseconds(2);
  // Sets the trigPin on HIGH state for 10 micro seconds
  digitalWrite(trigPin, HIGH);
  delayMicroseconds(10);
  digitalWrite(trigPin, LOW);
  // Reads the echoPin, returns the sound wave travel time in microseconds
  duration = pulseIn(echoPin, HIGH);
  // Calculate the distance
```

```
distanceCm = duration * SOUND_SPEED/2;
  // Convert to inches
  distanceInch = distanceCm * CM_TO_INCH;
  // Prints the distance in the Serial Monitor
  Serial.print("Distance (cm): ");
  Serial.println(distanceCm);
  Serial.print("Distance (inch): ");
  Serial.println(distanceInch);
  PublishData(distanceCm);
  delay(1000);
  if (!client.loop()) {
   mqttconnect();
  void PublishData(float Cm) {
  mqttconnect();//function call for connecting to ibm
     creating the String in in form JSon to update the data to ibm cloud
  String payload = "{\"Distance (cm)\":";
  payload += Cm;
  payload += "}";
  Serial.print("Sending payload: ");
  Serial.println(payload);
  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");// if it sucessfully upload data on the cloud
failed
 } else {
    Serial.println("Publish failed");
void mqttconnect() {
 if (!client.connected()) {
    Serial.print("Reconnecting client to ");
    Serial.println(server);
    while (!!!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
     delay(500);
```

```
}
     initManagedDevice();
     Serial.println();
void wificonnect() //function defination for wificonnect
  Serial.println();
  Serial.print("Connecting to ");
 WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish
the connection
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  Serial.println("");
  Serial.println("WiFi connected");
  Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
void initManagedDevice() {
 if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
    Serial.println("subscribe to cmd OK");
  } else
    Serial.println("subscribe to cmd FAILED");
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic);
 for (int i = 0; i < payloadLength; i++) {</pre>
    data3 += (char)payload[i];
  }
```

Images of ibm cloud:

