
## **Project Design Phase - I**

## **Solution Architecture**

| Date          | 10 November 2022                                   |
|---------------|--|
| Team ID       | PNT2022TMID54368                                   |
| Project Name  | Smart Farmer-IoT Enabled Smart Farming Application |
| Maximum Marks | 4 Marks  |

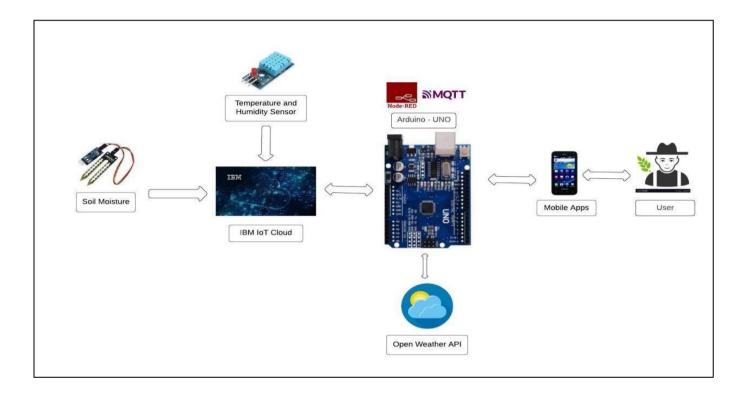

- The different soil parameters (Soil Moisture ,temperature, humidity) are sensed using different sensors, and the obtained value is stored in the IBM cloud.
- Arduino UNO is used as a processing unit that processes the data obtained from sensors and weather data from weather API.
- Node-red is used as a programming tool to wire the hardware, software, and APIs. The MQTT protocol is followed for communication.
- All the collected data are provided to the user through a mobile application that was developed using the MIT app inventor. The user could make a decision through an app, whether to water the crop or not depending upon the sensor values. By using the app, they can remotely operate the motorswitch.