EASWARI ENGINEERING COLLEGE

(AUTONOMOS)
RAMAPURAM CHENNAI- 600089

NOVEMBER 2022

DEPARTMENT OF ELECTRONICS AND COMMUNICATION ENGINEERING

PROJECT BASED EXPERIENTIAL LEARNING PROGRAM (NALAIYA THIRAN)

GAS LEAKAGE MONITORING AND ALERTING SYSTEM

A PROJECT REPORT

TEAM ID : PNT2022TMID54370

Submitted by

Manoj A S   (310619106072)

Manoj kumar C   (31061910674)

Meera sahib maraikar S (310619106074)

Narendra Kumar R   (310619106086)

PROJECT REPORT FORMAT

GitHub & Project Demo Link

1.INTRODUCTION

1.1 Project Objective

By the end of this project you will:

- Gain knowledge of Watson IoT Platform.

- Connecting IoT devices to the Watson IoT platform and exchanging the sensor data.

- Gain knowledge on IBM Cloudant DB • Explore Python client libraries of

Watson IoT Platform.

- Explore Python library for integrating OpenCV for accessing the Live Camera Input

- Scan the QR code in live streaming and retrieve the QR code details

- Gain knowledge of web application development.

- Gain knowledge of storing the data in Cloudant DB
- Generating QR codes with the required data.

1.2 Project Flow

- The parameters like hazardous gas levels, fire, humidity, and temperature data are published to the Watson IoT platform

- The device will subscribe to the commands from the application andtake decisions accordingly to switch on the rainwater sprinkler in case of emergencies

- Sensor data is visualized in the Web Application

To accomplish this, we have to complete all the activities and tasks listed below:

- Create and configure IBM Cloud Services ○ Create IBM Watson IoT Platform and Device ○ Create Node-RED service
- Develop the Python Script ○ Develop the Python Script
- Develop a web Application using Node-RED Service. ○ Develop the Web application using Node-RED ○ Testing the Web UI by giving the required inputs

2 . LITERATURE SURVEY

LITERATURE 1:

IOT BASED HOME SAFETY GAS LEAKAGE DETECTION AND AUTOMATIC BOOKING SYSTEM:

Internet of things try towards making life less complex what's more, quicker via robotizing the whole little errands related with the life of human. Today, everything is getting keen because of the innovative advancement, for example, of IOT. As IOT is valuable for robotizing the assignments, the upside of IOT can likewise be far reaching for improving the helpful security strategies. Security plays a significant role while constructing home, buildings, industries as well as towns. The enlarged focus of certain gases in the environment can be exceptionally unsafe, in recent time, everyone needs a facility which reduces time and effort and expect their work to be as easy as possible. One such region where man wants to get the work quicker and simpler is cooking. Most ordinarily LPG is utilized for cooking reason which was presented by Dr.Walter Snelling. It is a amalgamation of propane and butane alongside soaked substance notwithstanding unsaturated hydrocarbon substance. Gas undertakings utilizes SMS, IVRS or Online reserving for the LPG, which is tedious strategies in individuals' day by day life. However, due to fast nature and high competition, today people look for smarter way of operations than tedious and mechanical as well as manual routine. As such, booking gas has also become one of the tasks where one has tendency to either postpone or forget its booking due to busy schedule and lack of time.

 Usually in home or industries, most of the disaster happens due to gas leakages, which leads to several accidents and also causes human life. In order to handle such situation, the proposed gas leakage detection and monitoring system is developed and put forth in this paper. In this layout MQ-6 sensor is used to detect and

sense the gas leakage and the temperature sensor is also placed to reduce the false deduction. This proposed system is not only capable of Sensing or detecting the gas leakages as well as alerting the user about the gas leakage by buzzer alarm and also displaying alert message in LCD display simultaneously switch on the exhaust fan and start the stepper motor, external coupling is made to turn off the gas regulator. PIR sensor also placed in the home to notify about the human presence.

LITERATURE 2:

ARDUINO BASED GAS LEAKAGE DETECTION SYSTEM USING IOT:

It has become important factor nowadays to bring the technology into our home and office. By making the place smart, the day-to- day activities are becoming more and easier. The development of home automation has become mandatory in homes as people are moving towards to the smart home concepts. The supply gas will also be stopped with the use of solenoid, ultimately preventing the chance of accident. This system will not only able to detect the leakage of gas but also alerting through audible alarms. Presence of excess amounts of harmful gases in environment then this system can notify the user. System can notify to society admin about the condition before mishap takes place through a message. This system will not only able to detect the leakage of gas but also alerting through audible alarms. Presence of excess amounts of harmful gases in environment then this system can notify the user. The people in the neighbors can also be included in case of an emergency. LPG gas sensor is used for input. A buzzer is connected along with the circuit to indicate the use of the output.

LITERATURE 3:

IOT BASED DETECTION OF LEKAGAES IN GAS PIPES:

The Internet of things (IOT) is the network of electronic devices, which are related to embedded systems and also other domains

through the internet. Liquids and gases are mostly transported in pipelines like oil, natural gases, biofuels and water. It is necessary to check whether the pipes are good enough without cracks. The cracks may lead to disasters. There is a real life incident which needs to be taken seriously. This project might help to get aware of it. The cruel incident took place in Tlahuelilpan town situated in Mexican state. On 18, Jan 2019 a pipeline transporting gasoline exploded taking the life of 96 people and a lots of people gets injured. Pipeline monitoring, control, operation and maintenance are very important activities, which have evolved considerably. The detection and behavior of leaks has deserved special attention by different researchers.

This paper deals with the detection of leakages in gas pipes and thusreducing the man power

LITERATURE 4:

A SMART NATURAL GAS LEAKAGE DETECTION AND CONTROL SYSTEMFOR GAS DISTRIBUTION COMPANIES OF BANGLADESHUSING IOT:

This project proposes a smart mobile based model of gas leakage detection and control for gas distribution system of Bangladesh using IoT, called as smart natural gas leakage detection and control system (SNLDCS). The proposed SNLDCS has been implemented in both software and hardware modules. The existing researches are about Liquefied Petroleum Gas (LPG) leakage detection that are used for cylinder gas. Hence, these models are not suitable for gas distributions companies of Bangladesh where natural gasleakage is being controlled from remote places. But the proposed model can quickly detect natural gas leakage by continuous monitoring and can control gas leakage by a smart phone from anywhere. The experimental results confirm that, implementation of SNLDCS model in gas distribution system in Bangladesh can provide the quickest detection and rapid resolve of gas leakage. As a result, it will increase safety, decreases system loss and reduces Greenhouse Gas (GHG) emission in the air.

LITERATURE 5:

DETECTION OFGAS LEAKAGE IN POLYMER INDUSTRIES USING IOT:

Gases leaked from polymer and carbide industries are very harmful to all living things. Major disaster happened at Bhopal on December 3, 1984. Recently an industrial accident occurred at LG polymers chemical plant in the Vishakapattinam. As per the National Disaster Response Force (NDRF), the death toll was 11, and more than 1,000 people became sick after being exposed to the gas. To prevent from these types of accidents, safety system should build in high quality standards. Safety should be ensured by all levels. To incorporate technology in the Safety System, Internet of Things (IOT) technology is used to detect the gas leakage and prevent the disaster before it happened. Internet of Things [IOT] is asystem of interrelated computing devices without human – human or human– computer interaction. IOT is used to automating the daily tasks, the benefits of IOT can also be extendedfor enhancing the existing safety standards. Safety is the most important criterion while designing polymer industries. The spread of highly concentrated gases in the atmosphere can produce extremely dangerous condition. These gases might be flammable at certain temperature and humidity conditions, toxic after exceeding the specified concentrations limits or even a contributing factor in the airpollution of an area leading to problems such as smoke and reduced visibility which can in turn cause several accidents and also have adverse effect on the health of people.

2.1 PROBLEM STATEMENT

1. How does the Problem affect?

The main consequences are the emission of flammable substances into the environment, fire, explosion, and distribution of toxic substance. Serious risks of carbon monoxide poisoning in people and animals.

2. What is the issue?

Improper use of gas furnace, stove, or appliance.

Fault in the gas pipeline

3. What is the impact of the issue?

Create potential hazards for the workers in the

industry Create Pollution to environment

Diseases prone

4. What would happen if this problem is not solved?

Emission of toxic gases which is harmful to the

environment Leads to explosion or other types of fire

hazard Rusted and poor pipelines creates hazard.

5. What would happen if this problem is fixed?

Identifying and solving the issue parameters like pollution and spreading of poisonous gas ,we canfix the problem.
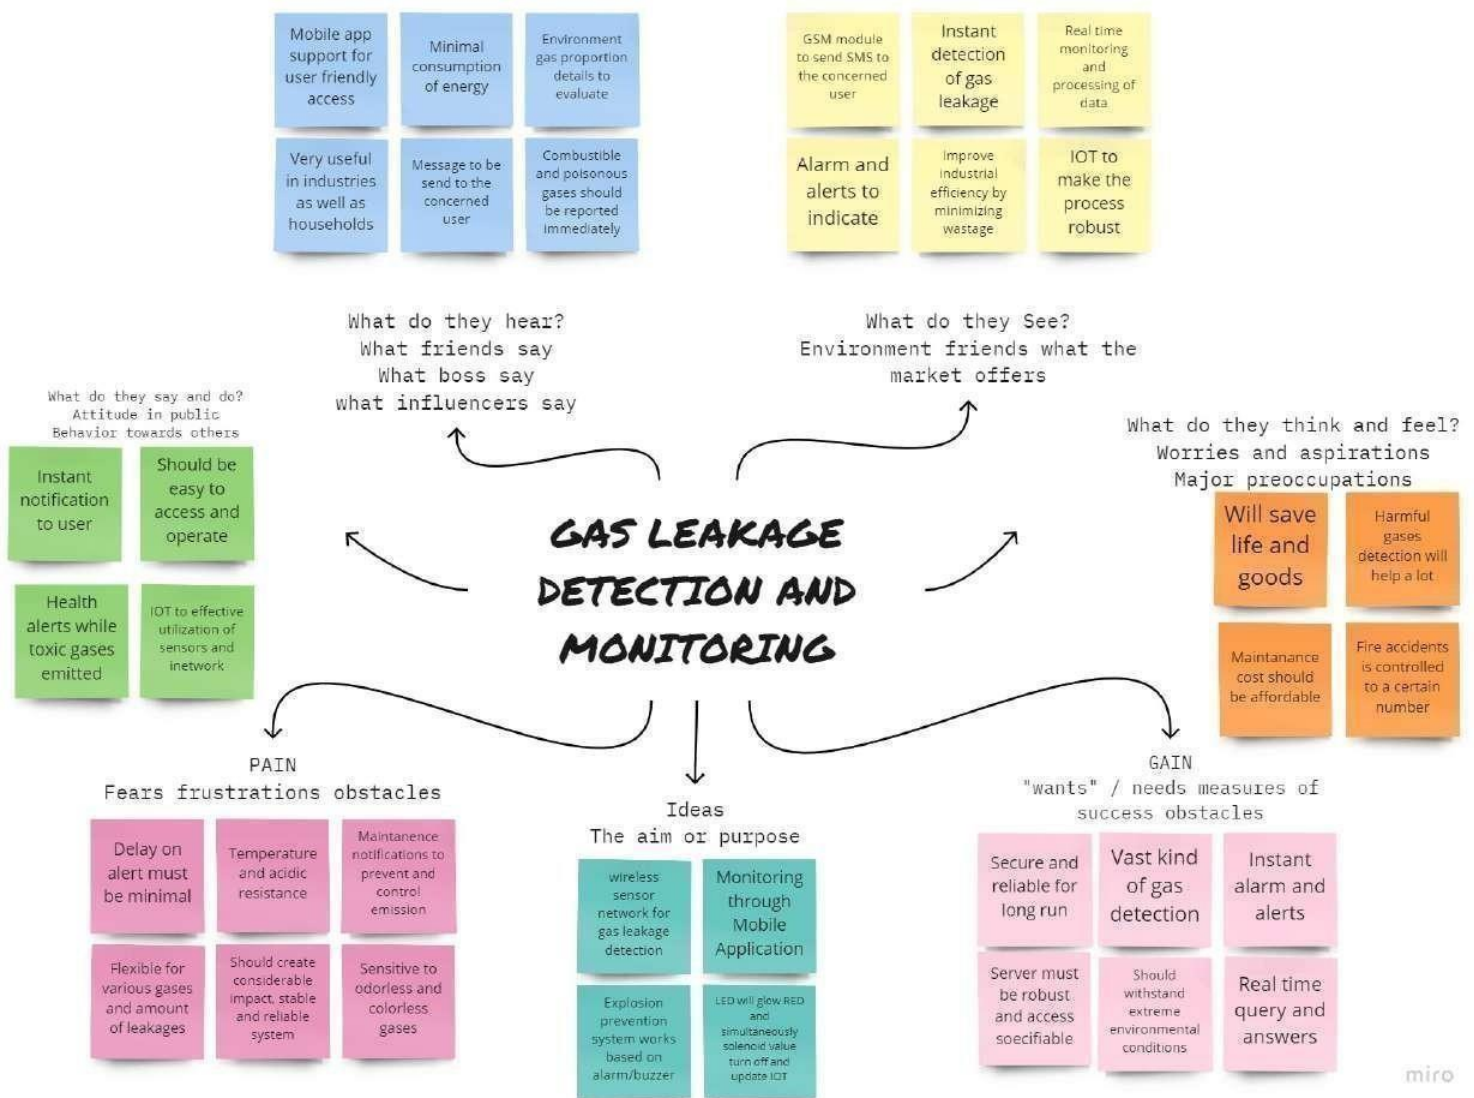
6. Why it is important to fix the problem?

Emission of harmful gases leads to varying of environmental weather and affects the earth layer which is protected by the UV radiation

3 . IDEATION AND PROPOSED SOLUTION

3.1 Empathy map
3.2 Ideation

Gas Detecting Sensor

Presence and concentration of hazardous gases and vapours like explosive gases , humidity and odour.

Use Relay

Cut off power supply to main switch and send email to higher authority about hazard.
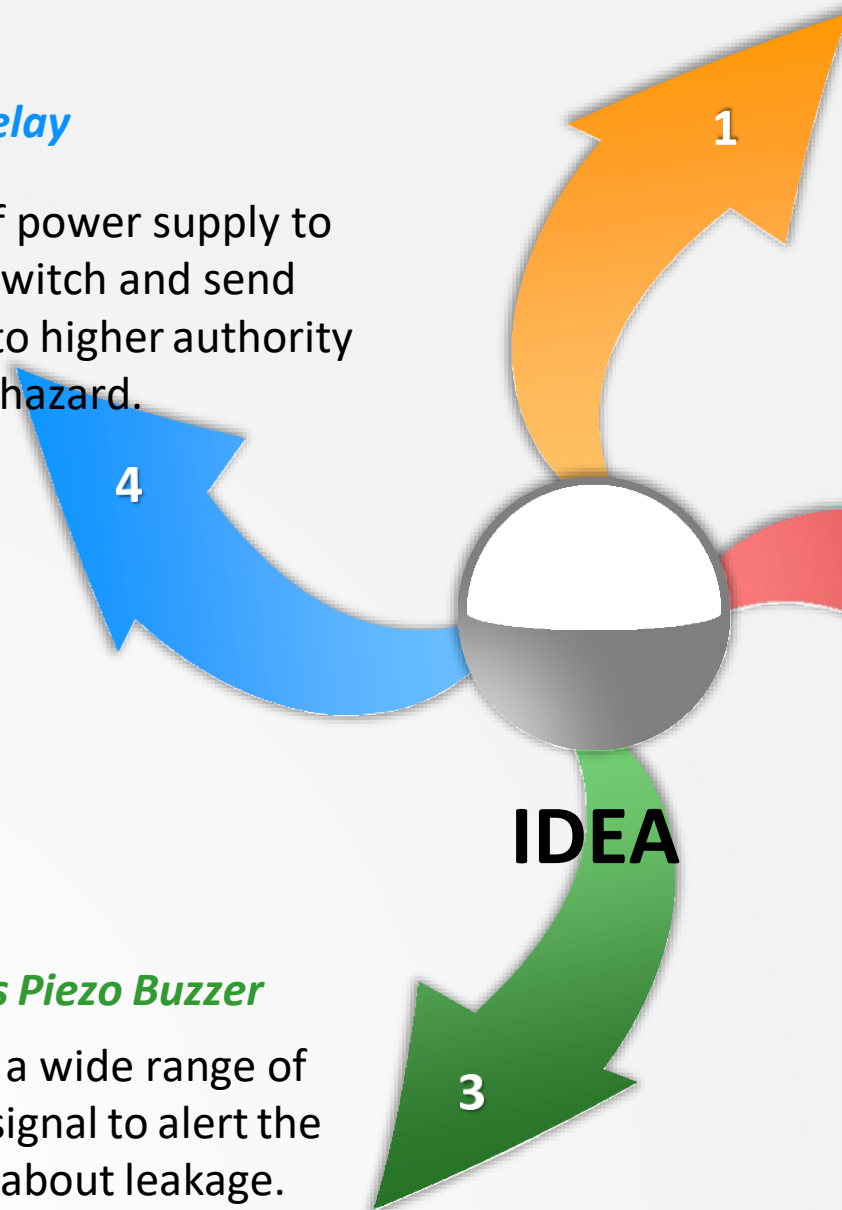
Harmful gas detected

Unsafe gas levels pose an immediate danger to workers o equipmen

Actuates Piezo Buzzer

Produce a wide range of audible signal to alert the workers about leakage.

IDEA

1
2
3
4

3.3 Proposed Solution

Proposed Solution:

S.No.	Parameter	Description
1.	**Problem Statement (Problem to be solved)**	⊙ Leaks are considered very dangerous since they can build into an explosive concentration So the proposed solution is used for the development for an efficient system & an application that can monitor and alert the workers
2.	**Idea / Solution description**	⊙ In several areas, the gas sensors will be integrated to monitor the gas leakage ⊙ The proposed system takes an automatic control action after the detection of 0.001% of LPG leakage. ⊙ This automatic control action provides a mechanical handle driven by stepper motor for closing the valve ⊙ We are increasing the security for human by using the combination of a relay and the stepper motor which will shutdown the electric power of the house .Also by using a GSM module, we are sending an alert message by SMS (Short messaging services) to warn the

		users about the LPG leakage and a buzzer is provided for alerting the neighbors in case of the absence of the users about the LPG leakage ⭕ The main advantage of this system over the manual method is that, it does all the process automatically and has a quick response time.
3.	**Novelty / Uniqueness**	⭕ User friendly ⭕ Pioneering study of natural gas detection with CCD in visible range
4.	**Social Impact / Customer Satisfaction**	⭕ Cost efficient ⭕ Easy installation and provide efficient results.
5.	**Business Model (Revenue Model)**	⭕ With widespread deployment of the urban natural gas industry, the energy security is now becoming one of the priorities in practice. ⭕ The gas leakage model was applied to analyse the pressure, temperature and flow rate of gas leakage over time under both the steady-state and dynamic conditions. ⭕ As the product usage can be understood by everyone, it is easy for them to use it properly for their safest organization.

6.	**Scalability of the Solution**	⭕ Establishing fast communication equipment with the nearest fire station and other relief station to have the fastest response in case of an accident.
		⭕ Even when the gas leakage is more, the product sense the accurate values and alerts the workers effectively

3.4 Problem Solution Fit

1.CUSTOMER SEGMENTS	6. CUSTOMER CONTRAINTS	5. AVAILABLE SOLUTIONS
For industry owner -Ensuring the safety of workers is the main thing. Sometimes it is hard to identify the area where the leakage occurs. The detection of leakage prevents the loss of lives	Proper maintenance should be taken atleast once in a month and this prevents the customers from taking actions in gas leakage problem.	Usage of sensors to sense gas Leakage. Buzzer to indicate the leakage. GSM module helps us to get notification when there is a gas leakage.

2. JOBS-TO-BE-DONE / PROBLEMS

- ✓ Capability of the device to withstand in harsh environment is questionable.
- ✓ Due to network issue data couldn't be uploaded to the cloud at all times.

9. PROBLEM ROOT CAUSE

- ✓ Sometimes sensor doesn't work properly which can cause the major problem.
- ✓ Location of the device installation and the network plan used by the user are the root cause of the network issue.

7. BEHAVIOUR

- ✓ Network issue is very common as most of the industries are located at the country side. Here contact both the developers and the service providers.
- ✓ To determine the gas characteristics and solve the issue, they will locate the leak and identify the warning.

3. TRIGGERS

- ✓ Accidents due to gas leakages and loss of physical property and life.
- ✓ Safe precautions for the workers to work without fear.

4. EMOTIONS: Before/After

- ✓ Before the action is taken the user feels deceived and cheated.
- ✓ After the problem is resolved user feels the sincerity of the developer

10. YOUR SOLUTION

- ✓ Low cost IOT based device that can be easily accessed and fixed by people.
- ✓ Network strength must be boosted in the device.
- ✓ Device can be manufactured in multiple standards based on the environment.

8. CHANNELS OF BEHAVIOUR

ONLINE

- ✓ Monitor the status of the sensors
- ✓ Notification incase of any gas leakage.

OFFLINE

- ✓ Prevent physical damage to sensor.
- ✓ Provide proper network and power supply to sensors.
- ✓ Complaint letters.

4 .REQUIREMENT ANALYSIS

4.1 Functional
4.2 Non-Functional Requirements

Functional Requirements:

Following are the functional requirements of the proposed solution.

| FR No.	Functional Requirement (Epic)	Sub Requirement (Story / Sub-Task)
FR-1	User Registration	Registration through Form Registration through Gmail Registration through LinkedIN
FR-2	User Confirmation	Confirmation via Email Confirmation via OTP
FR-3	Hardware Requirement	Optical Soil Ultra-Sonic Flow Meter
FR-4	Software Requirement	Flow change Pressure point Statistic
FR-5	User Welfare	Calibration No Poisoning of the Sensor Reliable in All Environmental Conditions Easy to Use

Non-functional Requirements:

Following are the non-functional requirements of the proposed solution.

FR No.	Non-Functional Requirement	Description
NFR-1	**Usability**	The sensor-enabled solution helps prevent the high risk of gas explosions and affecting any casualties within and outside the premises
NFR-2	**Security**	The device is intended for use in household safety where appliances and heaters that use natural gas and liquid petroleum gas (LPG) may be a source of risk.
NFR-3	**Reliability**	Gas Leakage Detection System (GLDS) can detect leakage at homes, commercial premises or factories. GLDS detects the leakage soon after it happened and sends users an immediate alarm on the incident.

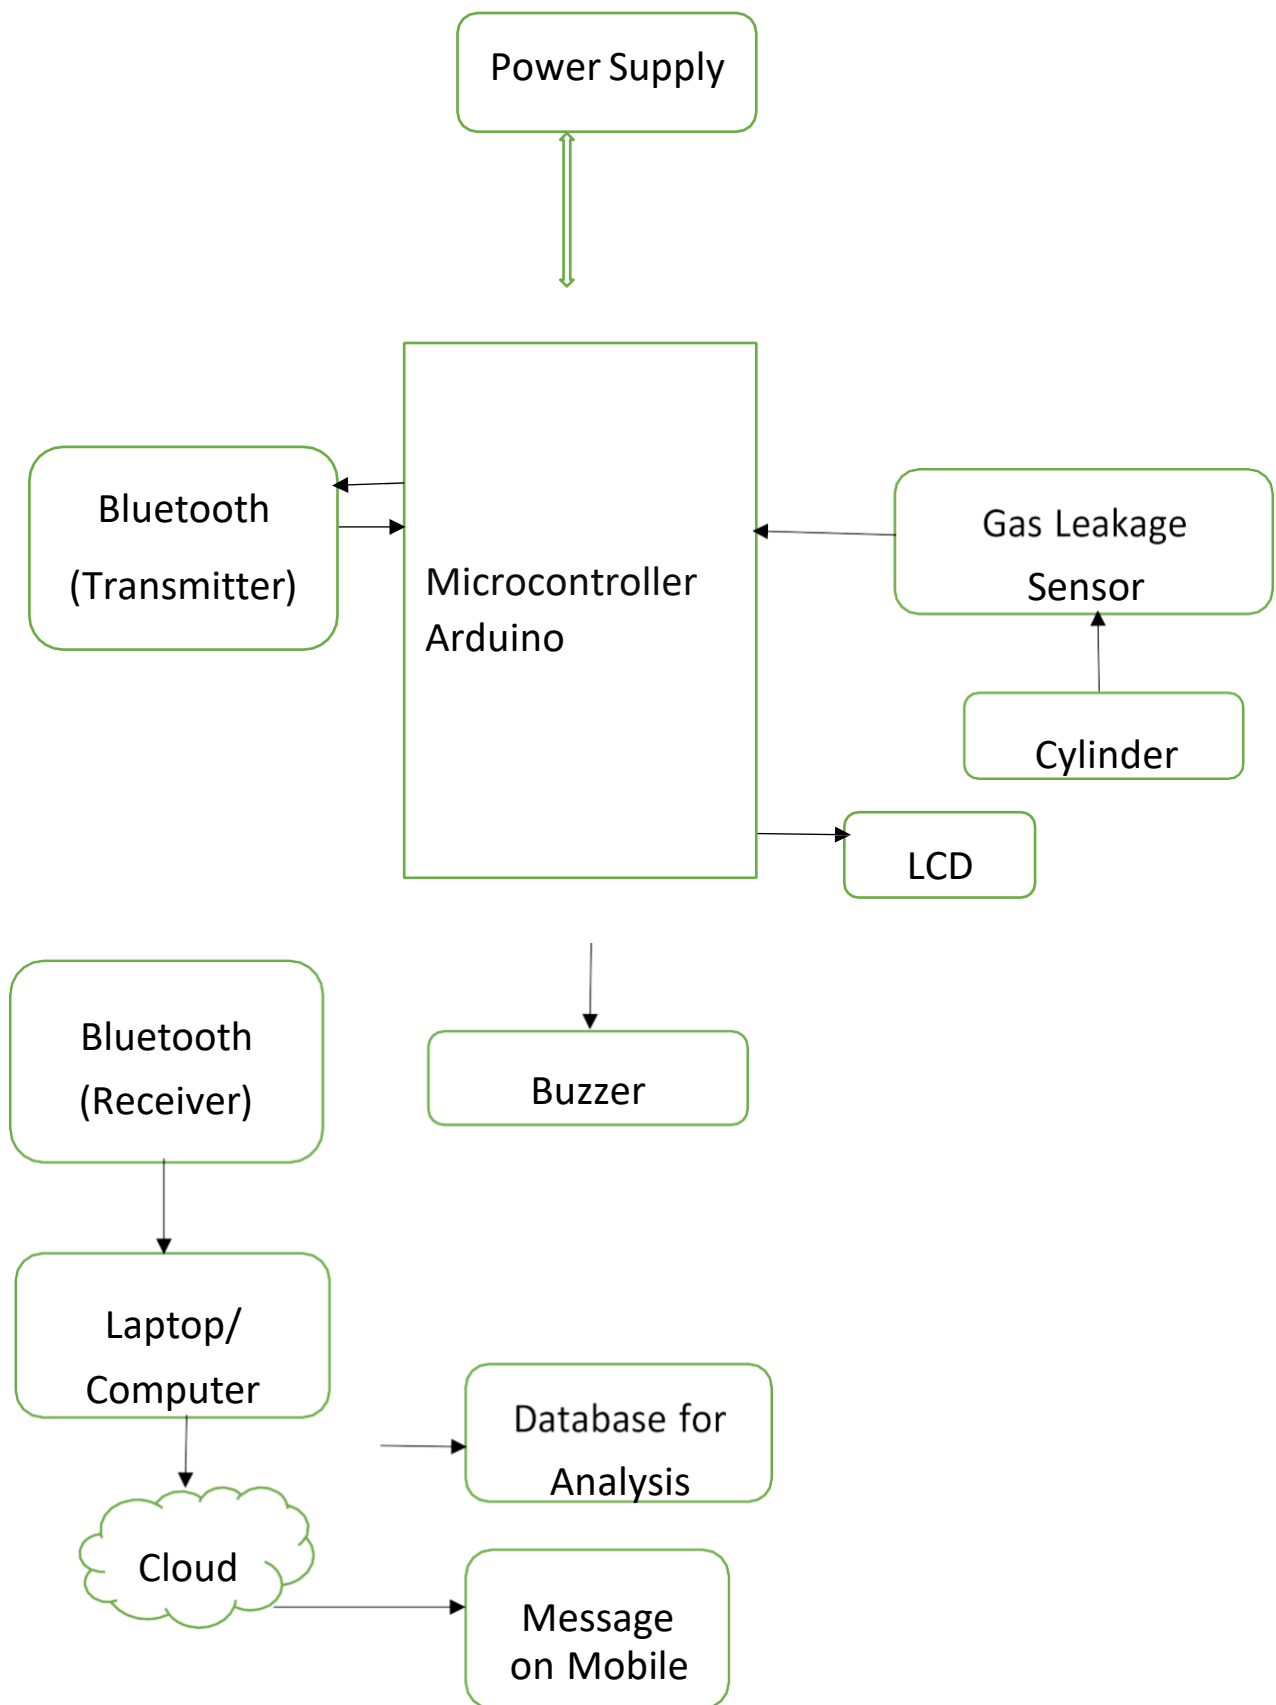| NFR-4	**Performance**	The Gas Leakage Detector is a wall mounted device fitted close to the floor level with an alarm setting at 20% of lower explosive limit. Whenever there is a leak, the in-built sensor detects and alerts the user in less than 5 minutes, much before it can cause any accidents
NFR-5	**Availability**	The circuit for an LPG leakage detector is readily available in the market, but it is extremely expensive). Presented here is a low-cost circuit for a Gas Leakage Detection that you can build easily.
NFR-6	**Scalability**	The system proves the need for gas detection alarm systems to be 100% reliable. A backup power supply can be included in the system design to augment for power failure condition. Also, calibration of the gas sensor can be done in other for a specific gas to be sensed instead of the LPG numerous gases it sense

5.   PROJECT DESIGN

5.1 Data Flow Diagrams
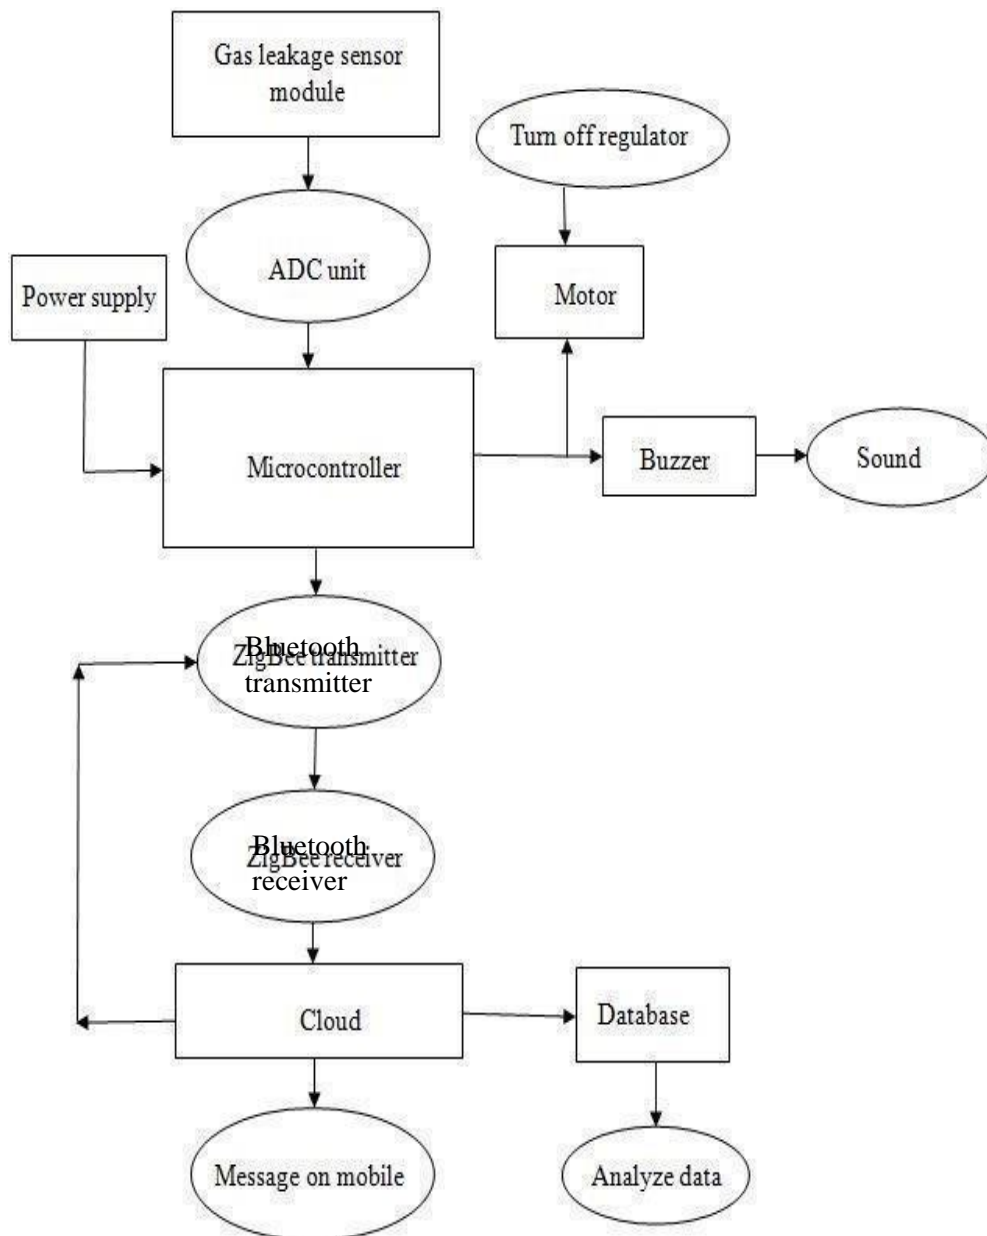
BluBlueetotooot thh
TranReceisvmitetrer

5.2 Solution and Technical Architecture
5.3 User Stories

```
                    ┌─────────────────┐
                    │  Power Supply   │
                    └─────────────────┘
                             ↕

┌──────────────────┐   ┌──────────────────┐   ┌──────────────────┐
│   Bluetooth      │ ← │                  │ ← │  Gas Leakage     │
│  (Transmitter)   │ → │  Microcontroller │   │  Sensor          │
└──────────────────┘   │  Arduino         │   └──────────────────┘
                       │                  │             ↑
                       │                  │   ┌──────────────────┐
                       │                  │   │  Cylinder        │
                       │                  │   └──────────────────┘
                       │                  │ → ┌──────┐
                       └──────────────────┘   │ LCD  │
                                              └──────┘
                             ↓
┌──────────────────┐   ┌──────────────────┐
│   Bluetooth      │   │     Buzzer       │
│  (Receiver)      │   └──────────────────┘
└──────────────────┘
         ↓
┌──────────────────┐
│   Laptop/        │   ┌──────────────────┐
│   Computer       │ → │  Database for    │
└──────────────────┘   │  Analysis        │
         ↓             └──────────────────┘
     ☁ Cloud     →     ┌──────────────────┐
                       │   Message        │
                       │   on Mobile      │
                       └──────────────────┘
```

JOURNEY STEPS Which step of the are you journey?	DISCOVERY Why do they even start the successful?	REGISTRATION Why would they trust us? others? describing?	ONBOARDING How can they feel	SHARING Why would they invite experience
ACTIONS do? What they expect?	Leakage of the gas is detected details to reach them Type of the gas leaked is detected	To share their contact functioning and faulty out To prioritize delivery	Check for well Check for authenticity devices Ensure all specifications are met	**What does the customer** Test device before sharing
NEEDS AND PAINS What does the customer what to avoid?	To prevent future disaster about the device and long life Network failure & human errors	Completely know society want to achieve and Not being customer friendly	Achieve maintenance Looks down on expensive	A way of helping Efforts going unrecognized
TOUCHPOINT	Through IOT connected	Website	Database	Contractors

devices such as mobile Apps management Visual demos   phones or systems

Warnings and buzzers

Secured feeling   Non complex   Trustable   Save peoples life
Happy about this   Easy process   Confident equipment   Generate good
discovery   handling revenue

6. PROJECT PLANNING AND SCHEDULING

6.1 Sprint Planning And Estimation

Product Backlog, Sprint Schedule, and Estimation (4 Marks)

Sprint	Functional Requirement (Epic)	User Story Number	User Story / Task	Story Points	Priority	Team Members
Sprint-1	Objective	USN-1	As a system, the gas sensor should detect the gas	8	High	Abitha Akshaya
Sprint-1	Features	USN-2	As a system, the gas sensor values displayed on LCD	5	High	Akshaya Ashwini
Sprint-1	Features	USN-3	As a system, when gas reaches the threshold value, Red color LED will glow	8	High	Ashwini Barani
Sprint-1	Features	USN-4	As a system, then Siren will ON	2	Low	Barani Abitha

Sprint	Functional Requirement (Epic)	User Story Number	User Story / Task	Story Points	Priority	Team Members
Sprint-2	Focus	USN-5	As a system, it should send location to the user where gas leakage is detected	5	Medium	Akshaya Barani
Sprint-2	Focus	USN-6	As a program, it should sendalerting SMStothe registeredmobilenumber	8	High	Abitha Ashwini
Sprint-2	Features	USN-7	As a system, the gas pipe should be closed automatically once it attains threshold.	5	Medium	Akshaya Abitha
Sprint 3	Data Transfer	USN-8	As a program, it should retrieve API key of the IBM cloud to send the details	3	Low	Ashwini Barani
Sprint 3	Data Transfer	USN-9	As a system, it should send sensor values along with latitude and longitude to IBM cloud and to NodeRed	5	Medium	Akshaya Ashwini

Sprint	Functional Requirement (Epic)	User Story Number	User Story / Task	Story Points	Priority	Team Members
Sprint 3	Data Transfer	USN-10	As an application, it should display the gas level details to the user through frontend mit app	8	High	Abitha Akshaya

Sprint	Functional Requirement (Epic)	User Story Number	User Story / Task	Story Points	Priority	Team Members
Sprint-4	Registration	USN-11	As a user, I must receive confirmation mail and SMS on registration	3	High	Akshaya Ashwini
Sprint-4	Dashboard	USN-12	As a user, I can login into the web application through email and password.	2	Medium	Abitha Barani
Sprint-4	Dashboard	USN-13	As a user, I can access the dashboard andmake use of available resources.	5	High	Barani Abitha
Sprint 4	Focus	USN-14	As a user, I must receive an SMS once the leakage is detected.	5	High	Akshaya Abitha
Sprint-4	Allocation	USN-15	As an admin, I must receive information about the leakage along with location and share exact location and route to the person. I must allot particular person to look after the leakage in a particular location.	4	High	Ashwini Barani

Project Tracker, Velocity & Burndown Chart: (4 Marks)

Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed (as on Planned End Date)	Sprint Release Date (Actual)
Sprint-1	20	6 Days	24 Oct 2022	29 Oct 2022		29 Oct 2022
Sprint-2	20	6 Days	31 Oct 2022	05 Nov 2022		05 Nov 2022
Sprint-3	20	6 Days	07 Nov 2022	12 Nov 2022		12 Nov 2022
Sprint-4	20	6 Days	14 Nov 2022	19 Nov 2022		19 Nov 2022

Velocity:

$$AV = \frac{sprint\ duration}{velocity} = \frac{20}{10} = 2$$

Imagine we have a 10-day sprint duration, and the velocity of the team is 20 (points per sprint). Let's calculate the team's average velocity (AV) per iteration unit (story points per day)

Burndown Chart:

A burn down chart is a graphical representation of work left to do versus time. It is often used in agile software development methodologies such as Scrum. However, burn down charts can be applied to any project containing measurable progress over time.

https://www.visual-paradigm.com/scrum/scrum-burndown-chart/
https://www.atlassian.com/agile/tutorials/burndown-charts

SPRINT 1

In Sprint 1, the sensor reads the gas value , and if it is above the threshold, the RED led will glow and Buzzer will ON.

If the sensor value is between the low level and threshold, Yellow color LED will glow.

Otherwise, if it is very lower than threshold, the Green color LED will glow.

CODE:

```
#include<LiquidCrystal_I2C.h>
LiquidCrystal_I2C lcd(32, 16, 2);
int green = 2; int yellow = 3; int
red = 4; int siren = 5; int gas =
A0; int sensorValue = 0; void
setup()
{
  Serial.begin(9600);
  lcd.init(); lcd.clear();
  lcd.backlight();
  lcd.setCursor(3,0);
  lcd.print("GAS
  LEAKAGE");
  lcd.setCursor(4,1);
  lcd.print("DETECTION");
  delay(3000);    lcd.clear();
  lcd.setCursor(0,0);
```

```
    lcd.print("Gas   Value:   ");
  pinMode(green, OUTPUT);
  pinMode(yellow,
  OUTPUT);    pinMode(red,
  OUTPUT);  pinMode(siren,
  OUTPUT); digitalWrite(red,
  LOW);   digitalWrite(yellow,
  LOW);    digitalWrite(green,
  LOW);
}
void loop()
{
  sensorValue = analogRead(gas);
  Serial.println(sensorValue);
  lcd.setCursor(11,0);
  lcd.print(sensorValue);
  if(sensorValue > 500)

  {
    lcd.setCursor(0,1);
    lcd.print("GAS
    DETECTED");
    digitalWrite(red,        HIGH);
    digitalWrite(yellow,     LOW);
    digitalWrite(green,      LOW);
    tone(siren, 200);
```

```
  }
  else if(sensorValue > 281 && sensorValue < 500)
  {
   lcd.setCursor(0,1); lcd.print("
     ");
   digitalWrite(yellow, HIGH);
   digitalWrite(red,     LOW);
   digitalWrite(green,   LOW);
   noTone(siren);
  }
  else
  {
   lcd.setCursor(0,1); lcd.print("
     ");
   digitalWrite(green, HIGH);
   digitalWrite(red,     LOW);
   digitalWrite(yellow,
   LOW); noTone(siren);
  }
  delay(1000);
}
```

Thus Sprint 1 is successfully completed.

SPRINT 2

In Sprint 2, the sensor value is above 500, it will check the gate condition whether it is open or close.

The Servo motor controls the knob of the gate.

If the value is above the threshold, it will send the message "Gas Detected"

CODE:

```
#include<Servo.h>
#include <TinyGPS++.h>
#include <SoftwareSerial.h>
#include<LiquidCrystal_I2C.h>
LiquidCrystal_I2C lcd(32, 16, 2);
int GPSBaud = 9600;
TinyGPSPlus gps;
SoftwareSerial sgps(13, 15); //Rx , Tx gps
SoftwareSerial sgsm(3, 1); // Rx , Tx gsm
#define KNOB 3
#define LEVER 2
Servo myservo;
int  gas  =  A5;  int
sensorValue  =  0;  bool
gateClosed = true;


void setup()
{
```

```
    Serial.begin(9600);
    pinMode(LEVER, INPUT);
    myservo.attach(KNOB);
    myservo.write(90);
    sgsm.begin(9600);
    sgps.begin(9600);
    lcd.init(); lcd.clear();
    lcd.backlight();
    lcd.setCursor(3,0);
    lcd.print("GAS
    LEAKAGE");
    lcd.setCursor(4,1);
    lcd.print("DETECTION");
    delay(3000); lcd.clear();
    lcd.setCursor(0,0);
    lcd.print("Gas Value: ");
}

void loop()
{
    sensorValue = analogRead(gas);
    Serial.println(sensorValue);
    if(sensorValue > 500 && !gateClosed)
    {
```

```
  Serial.println("GAS      DETECTED");

  lcd.setCursor(0,1);      lcd.print("GAS

  DETECTED  "); sendSMS("GAS IS

  DETECTED!!");    myservo.write(90);

  gateClosed = true; sendSMS("THE

  KNOB IS CLOSED");

  lcd.setCursor(0,1);

  lcd.print("KNOB IS CLOSED");

  delay(1000);

}


else if(sensorValue > 500 && gateClosed)

{

  Serial.println("GAS                DETECTED");

  lcd.setCursor(0,1); lcd.print("GAS DETECTED ");

  sendSMS("GAS        IS        DETECTED!!");

  sendSMS("THE KNOB IS ALREADY CLOSED");

  lcd.setCursor(0,1);       lcd.print("KNOB     IS

  CLOSED"); delay(1000);

}

else

{

  byte buttonState = digitalRead(LEVER); if(buttonState

  == HIGH)

  {
```

```arduino
    myservo.write(0);   gateClosed   =
    false;    Serial.println("GATE    IS
    OPENED");
  }
  else
  {
   myservo.write(90);   gateClosed   =
   true;    Serial.println("GATE    IS
   CLOSED");
  }
 }
}
void sendSMS(char*message)
{
 while (sgps.available() > 0) if
   (gps.encode(sgps.read()))
  {
   if (gps.location.isValid())
   {
     sgsm.listen(); sgsm.print("\r"); delay(1000);
     sgsm.print("AT+CMGF=1\r"); // AT COMMAND TO SEND
     SMS delay(1000);
     /*Replace XXXXXXXXXX to 10 digit mobile number & ZZ
     to 2 digit country code*/
     sgsm.print("AT+CMGS=\"+919025681637\"\r"); // REGISTERED
```

NUMBER TO SEND SMS delay(1000);

    //The text of the message to be sent.

    sgsm.print(message);

    sgsm.print("https://www.google.com/maps/?q=");   //

    MAPS   sgsm.print(gps.location.lat(),   6); //   LAT

    sgsm.print(","); sgsm.print(gps.location.lng(), 6); // LONG

    delay(1000); sgsm.write(0x1A); delay(1000);

  }

   }

}

Thus Sprint 2 is successfully completed.

SPRINT 3

In Sprint 3, the sensor data will send to the IBM Cloud.

Along with the sensor value, it should send the latitude and longitude to IBM Cloud and Node Red.

CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
#include <ArduinoJson.h>

WiFiClient wifiClient;

#define ORG "mz6rat"
#define DEVICE_TYPE "ESP8266"
#define DEVICE_ID "12345"
#define TOKEN "123456789"
#define speed 0.034
char server[] = ORG
".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
```

```cpp
char topic[] = "iot-2/cmd/home/fmt/String"; char
authMethod[] = "use-token-auth"; char token[] =
TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();
const int trigpin=5; const
int echopin=18;
String command;
String data="";
String lat="13.356563";
String lon="80.141428";
String name="point1";
String icon="fa-fire";
long duration;
int dist;
void setup()
{
  Serial.begin(115200);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
  wifiConnect();
  mqttConnect();
}
void loop() {
publishData();
  delay(500);
if (!client.loop()) {
    mqttConnect();
  }
}
void wifiConnect() {
  Serial.print("Connecting to "); Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST",      "",      6);      while
  (WiFi.status() != WL_CONNECTED) {
    delay(500);
  Serial.print("."); }
```

```cpp
    Serial.print("WiFi connected, IP address: ");
  Serial.println(WiFi.localIP());
  }
  void mqttConnect() {
     if (!client.connected()) {
       Serial.print("Reconnecting MQTT client to ");
  Serial.println(server); while (!client.connect(clientId,
       authMethod, token)) {
          Serial.print(".");
          delay(1000);
       }
       initManagedDevice();
       Serial.println();
     }
  }
  void initManagedDevice() {
     if (client.subscribe(topic)) {
       Serial.println(client.subscribe(topic));
       Serial.println("subscribe to cmd OK");
     } else {
       Serial.println("subscribe to cmd FAILED");
     }
  }
  void publishData()
  { digitalWrite(trigpin,LOW);
    digitalWrite(trigpin,HIGH);
    delayMicroseconds(10);
    digitalWrite(trigpin,LOW);
    duration=pulseIn(echopin,HI
    GH); dist=duration*speed/2;
    dist=dist/4; dist=100-dist;
    if(dist>80){
    lat="13.356563";
    lon="80.141428";
    }else{
```

```
      lat="0.000000";
      lon="0.000000";
  }
  DynamicJsonDocument doc(1024);
  String                payload;
  doc["Name"]=name;
  doc["Latitude"]=lat;
  doc["Longitude"]=lon;
  doc["Icon"]=icon;
  doc["GasPercent"]=dist;
  serializeJson(doc, payload);
  delay(3000);
  Serial.print("\n");
  Serial.print("Sending payload: ");
  Serial.println(payload);
  if (client.publish(publishTopic, (char*) payload.c_str()))
{
    Serial.println("Publish OK");
  } else {
    Serial.println("Publish FAILED");
  }
}
```

Sending payload:
{"Name":"point1","Latitude":"0.000000","Longitude":"0.000000","Icon":"fa-fire","GasPercent":23}
Publish OK

Sending payload:
{"Name":"point1","Latitude":"0.000000","Longitude":"0.000000","Icon":"fa-fire","GasPercent":23}
Publish OK

Sending payload:
{"Name":"point1","Latitude":"0.000000","Longitude":"0.000000","Icon":"fa-fire","GasPercent":23}
Publish OK

Sending payload:
{"Name":"point1","Latitude":"0.000000","Longitude":"0.000000","Icon":"fa-fire","GasPercent":23}
Publish OK

Sending payload:
{"Name":"point1","Latitude":"0.000000","Longitude":"0.000000","Icon":"fa-fire","GasPercent":23}
Publish OK

Event Payload

Event Name   Data

Time Received   Nov 16, 2022 9:29 PM

```
1  {
2     "Name": "point1",
3     "Latitude": "13.356563",
4     "Longitude": "80.141428",
5     "Icon": "fa-fire",
6     "GasPercent": 82
7  }
```

Thus Sprint 3 is successfully completed.

SPRINT 4

In Sprint 4,the gas percentage value detected by the sensor is displayed on the dashboard.

CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
#include <ArduinoJson.h>

WiFiClient wifiClient;

#define ORG "mz6rat"
#define DEVICE_TYPE "ESP8266"
```

```cpp
#define DEVICE_ID "12345"
#define TOKEN "123456789"
#define speed 0.034
char server[] = ORG
".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String"; char
authMethod[] = "use-token-auth"; char token[] =
TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();

const int trigpin=5;
const int echopin=18;
String command;
String data="";
String lat="13.356563";
String lon="80.141428";
String name="point1";
String icon="fa-fire";
long duration;
int dist;
void setup()
{
  Serial.begin(115200);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
  wifiConnect();
  mqttConnect();
}
void loop() {
publishData();
  delay(500);
if (!client.loop()) {
    mqttConnect();
  }
```

```
  }
void wifiConnect() {
   Serial.print("Connecting to "); Serial.print("Wifi");
   WiFi.begin("Wokwi-GUEST",        "",        6);        while
   (WiFi.status() != WL_CONNECTED) {
      delay(500); Serial.print(".");
   }
   Serial.print("WiFi connected, IP address: ");
 Serial.println(WiFi.localIP());
 }
void mqttConnect() {
   if (!client.connected()) {
      Serial.print("Reconnecting MQTT client to ");
 Serial.println(server); while (!client.connect(clientId,
     authMethod, token)) {
         Serial.print(".");
         delay(1000);
      }
      initManagedDevice();
      Serial.println();
   }
 }
void initManagedDevice() {
   if (client.subscribe(topic)) {
      Serial.println(client.subscribe(topic));
      Serial.println("subscribe to cmd OK");
   } else {
      Serial.println("subscribe to cmd FAILED");
   }
 }
 void publishData()
 { digitalWrite(trigpin,LOW);
   digitalWrite(trigpin,HIGH);
   delayMicroseconds(10);
   digitalWrite(trigpin,LOW);
   duration=pulseIn(echopin,HI
```

```cpp
GH); dist=duration*speed/2;
dist=dist/4; dist=100-dist;
if(dist>80){
lat="13.356563";
lon="80.141428";
}else{
   lat="0.000000";
   lon="0.000000";
}
DynamicJsonDocument doc(1024);
String                 payload;
doc["Name"]=name;
doc["Latitude"]=lat;
doc["Longitude"]=lon;
doc["Icon"]=icon;
doc["GasPercent"]=dist;
serializeJson(doc, payload);
delay(3000);
Serial.print("\n");
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c_str()))
{
   Serial.println("Publish OK");
} else {
   Serial.println("Publish FAILED");
}
}
```

The green color indicates, the gas value is very below the threshold value, thus there is no harm.
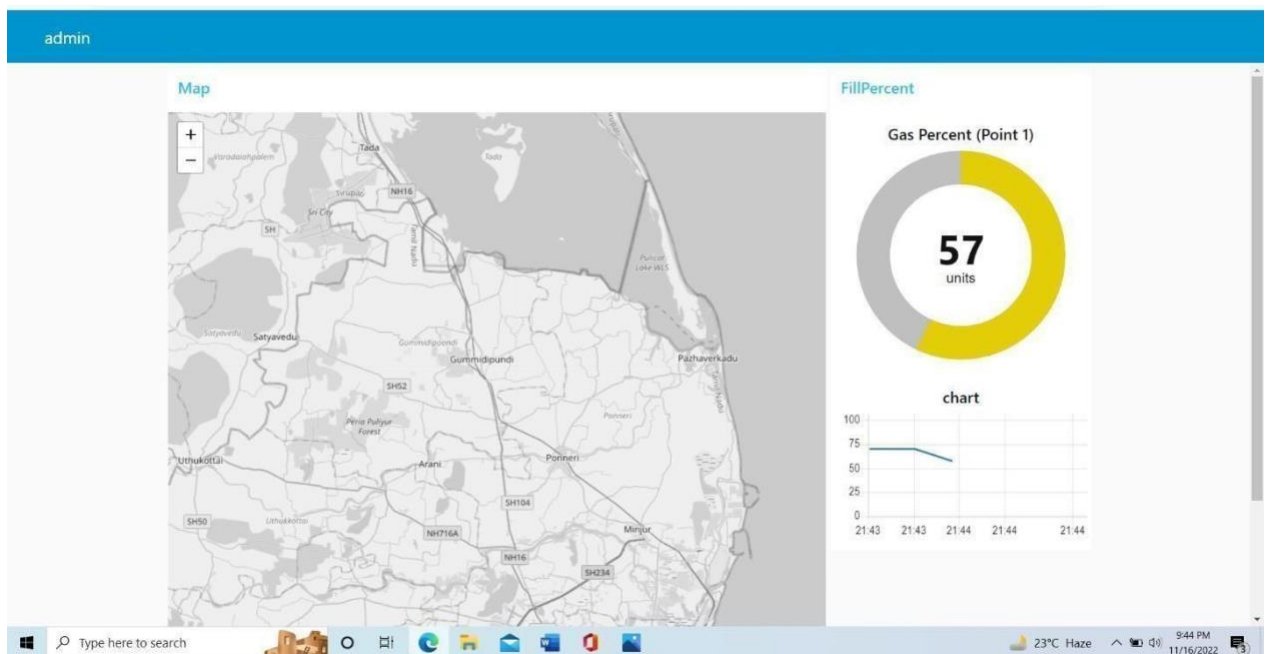
The Yellow color indicates, the gas value is on threshold.

The red color denotes it crosses the threshold value, hence gas leakage is detected.

Thus Sprint 4 is successfully completed.

6.2 SPRINT DELIVERY SCHEDULING

MILESTONE

Project Design & Planning
Ideation Phase

1

Project Design & Planning
Project design phase 1

2

Project Design & Planning
Project Design Phase 2

3

Project Design & Planning
Project planning phase

4

5

Project development phase
Sprint 1

6

Project development phase
Sprint 2

7

Project development phase
Sprint 3

8

Project development phase
Sprint 4
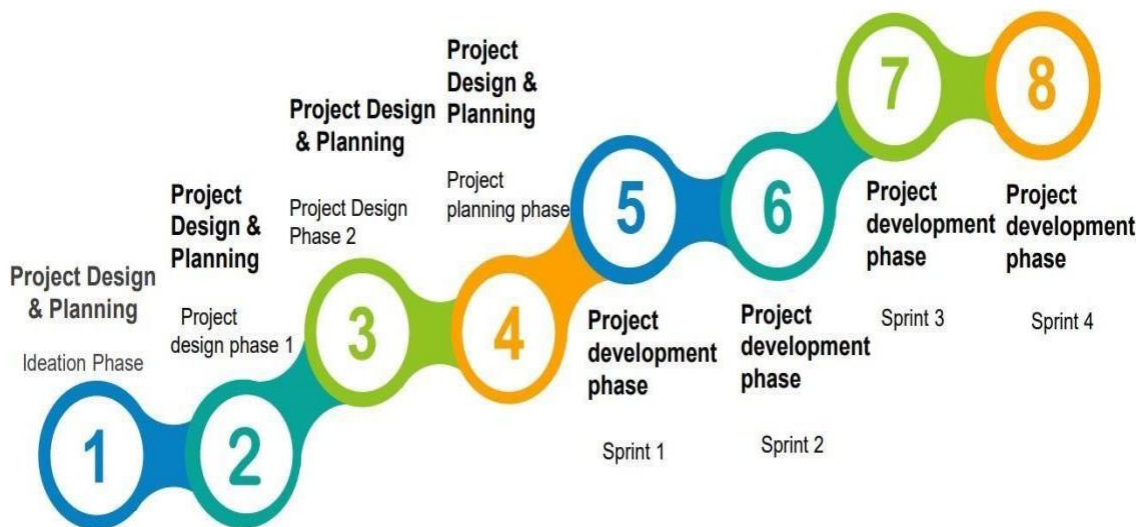
FINAL DELIVERABLE

6.3 REPORTS FROM JIRA
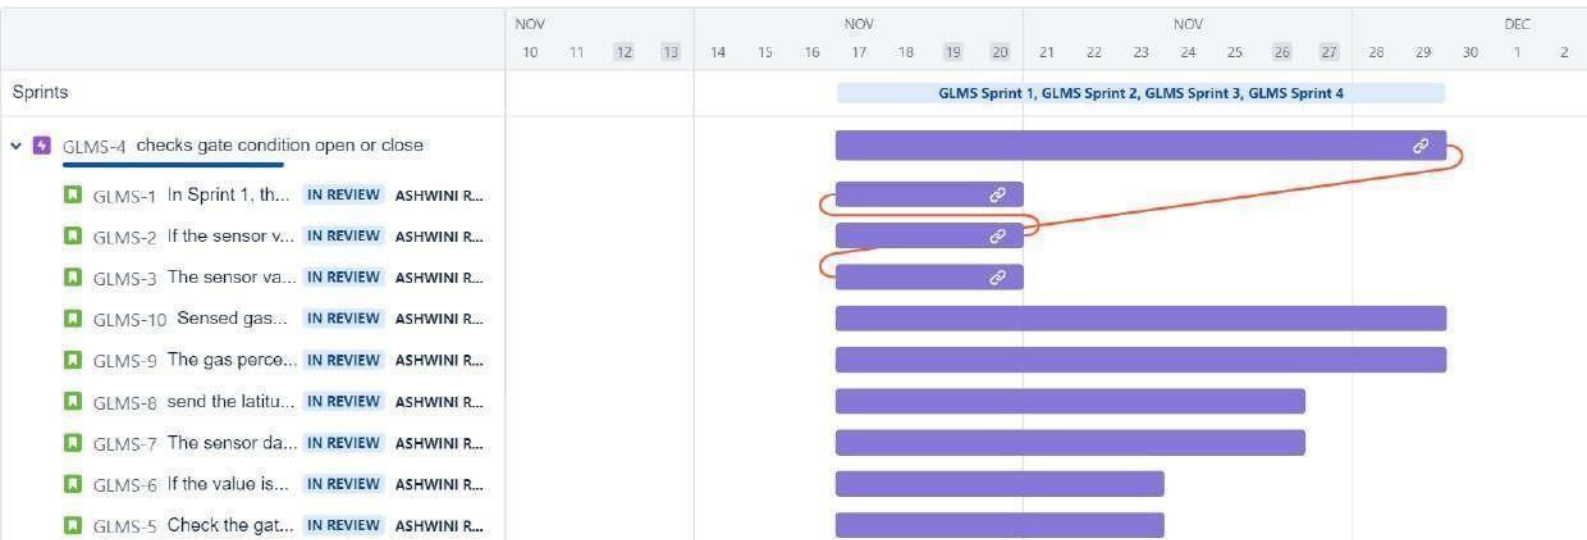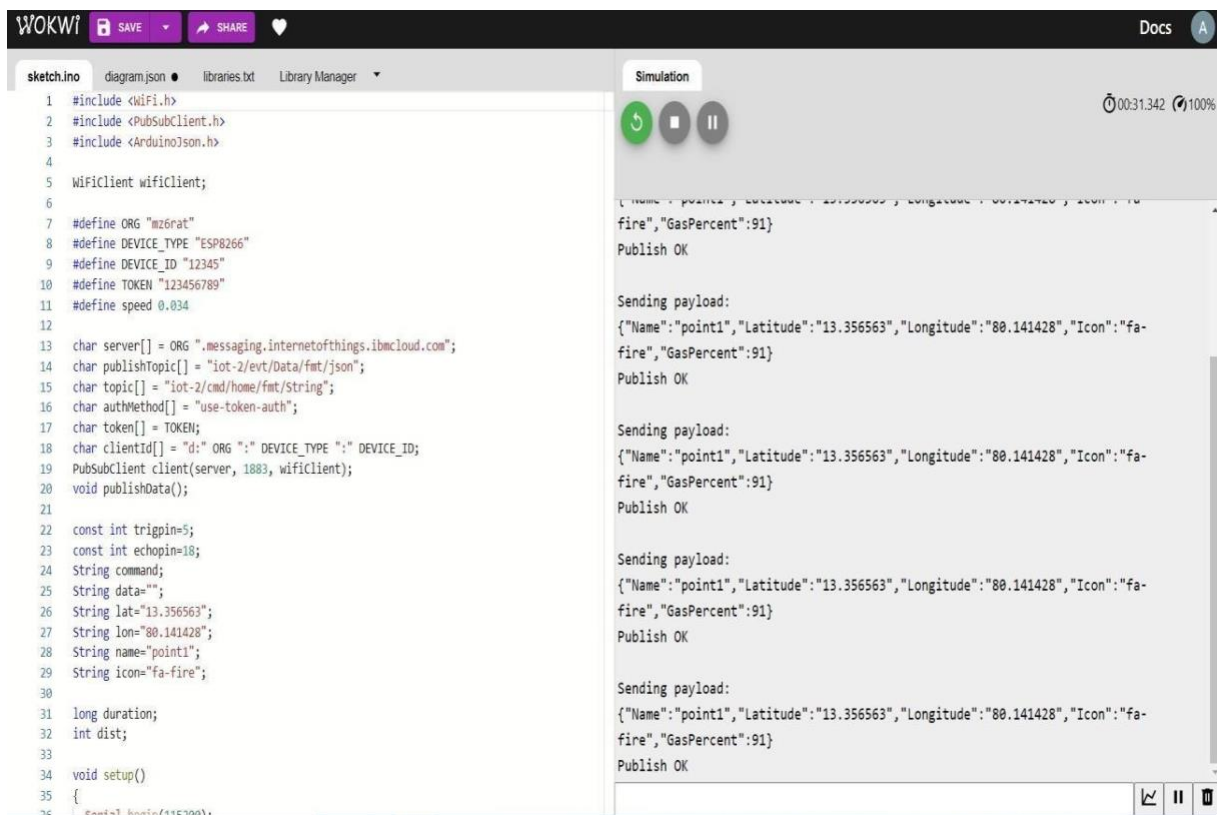
7. CODING AND SOLUTIONING

7.1 FEATURE 1

Step 1:

Find the location of the gas leakage along with gas percentage.

Step 2:

Output shown on the IBM IOT platform.

Step 3:

In this flow we use the IBM IoT node for getting data from IBM Watson IOT platform and changing them into the required format with the help of the function node and passing the values to the Gauge node (UI node) and to the World Map node.
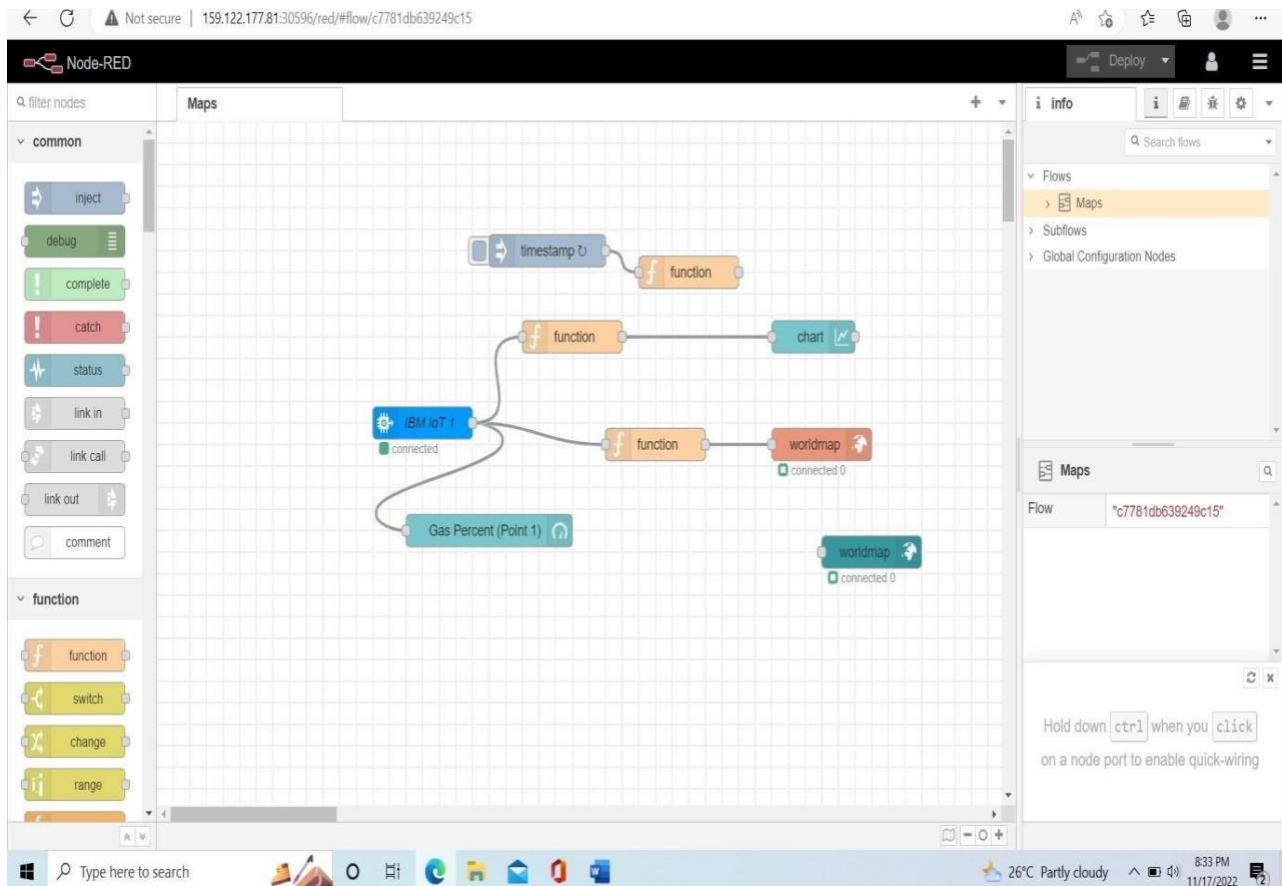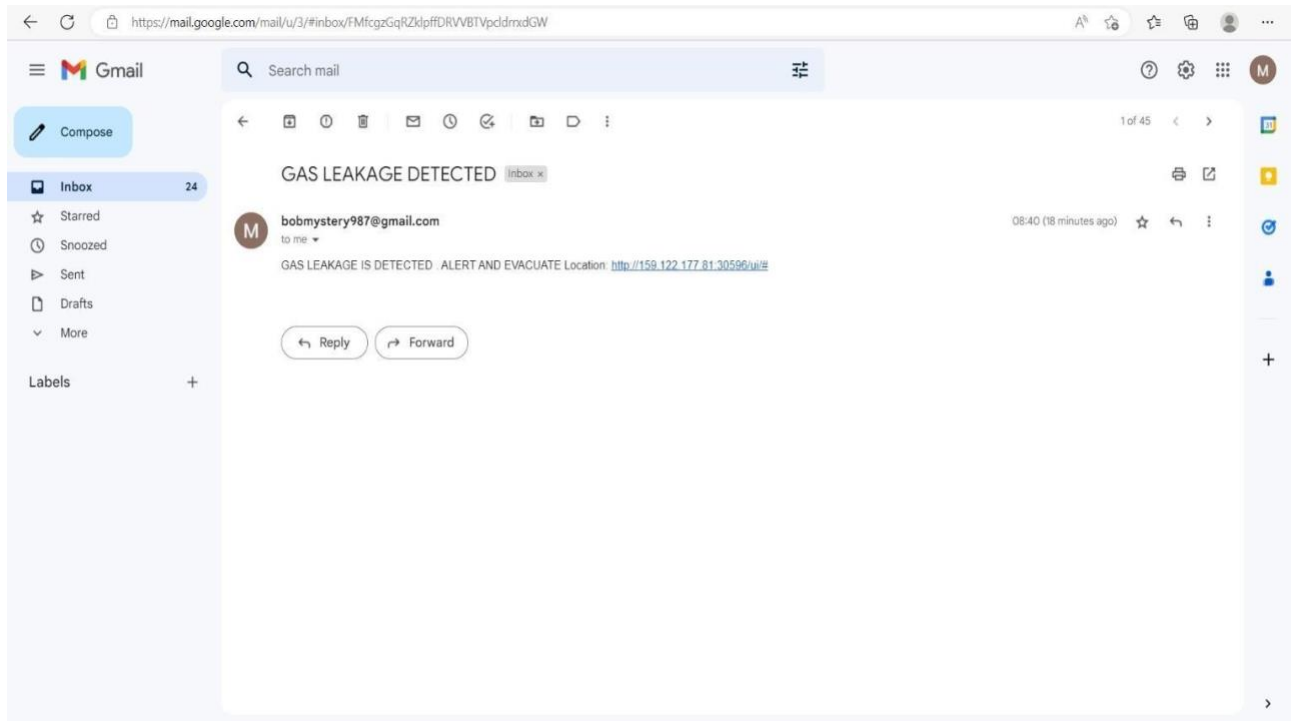

Step 4:

The below figure shows the location along with the gas percentage and it denotes that the leakage is more.
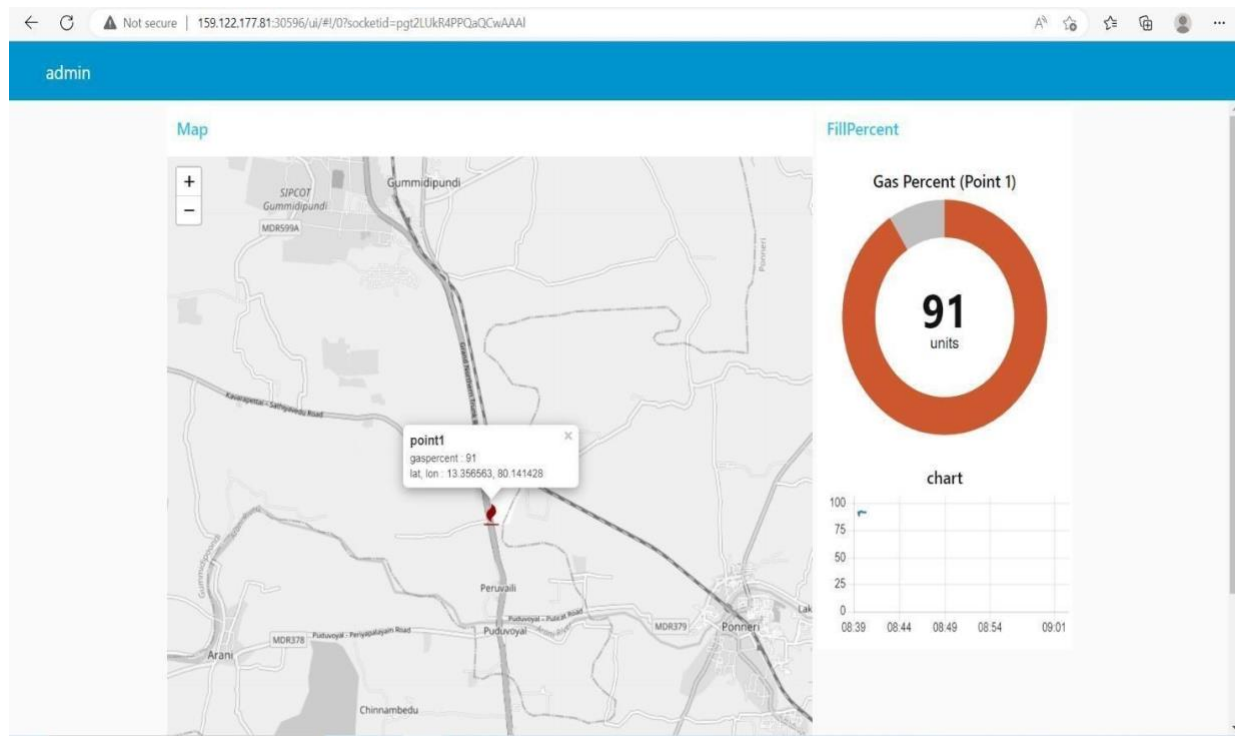
7.2 FEATURES 2

Mail come to the user along with the Alert Message. The mail also contains the location and gas percentage.

7.3 DATABASE SCHEMA

Create A Database in Cloudant :

Aim:

To create a database in Cloudant to store
the location of data.

Steps to be followed:

      i. Log in to IBM Cloud account. ii.
Navigated to `./resources`.

      iii. Clicked on the "Create Resource +" button.

      iv. Searched for "Cloudant".

      v. Chose the "Lite Version" and clicked on "Create".

6.3.A The Cloudant database resources is created successfully

6.3.B   Clicked on Launch Dashboard

6.3.C   Clicked on "Create Database". Entered "meowman" as the database name and the "Non-partitioned" option.

6.3.D   The database "meowman" was created successfully.
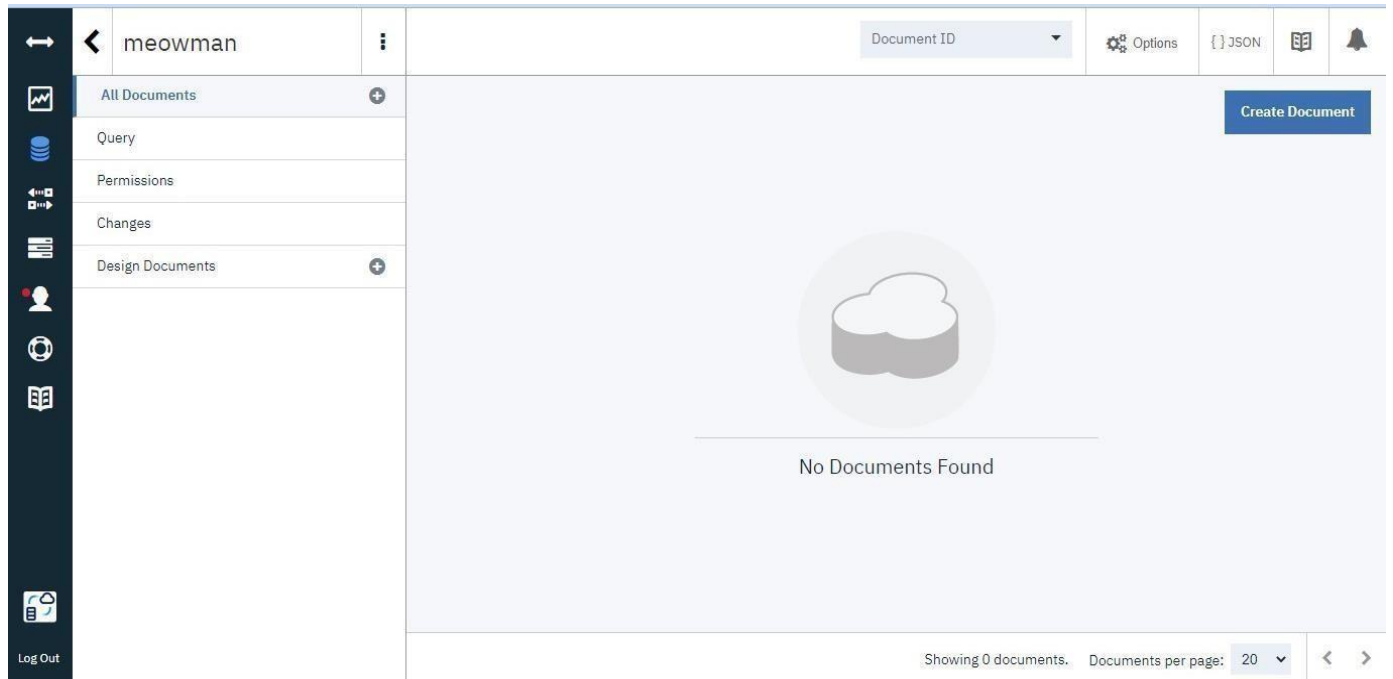
Result:

A database to store the location data was created successfully on Cloudant

• • •

database.

8. TESTING

1. Purpose of Document

The purpose of this document is to briefly explain the test coverage and open issues of the [ProductName] project at the time of the release to User Acceptance Testing (UAT).

8.1 User Acceptance Testing

2. Defect Analysis

Section	Total Cases	Not Tested	Fail	Pass
Print Engine	7	0	0	7
Client Application	50	0	0	50
Security	2	0	0	2

Outsource Shipping		3	0	0	3

This report shows the number of resolved or closed bugs at each severity level, and how they were resolved

Resolution	Severity 1	Severity 2	Severity 3	Severity 4	Subtotal
By Design	10	4	2	3	19
Duplicate	1	0	3	0	4
External	2	3	0	1	6
Fixed	10	2	4	20	36
Not Reproduced	0	0	1	0	1
Skipped	0	0	1	1	2
Won't Fix	0	5	2	1	8
Totals	23	14	13	24	74

8.2 Test Cases

3. Test Case Analysis

This report shows the number of test cases that have passed, failed, and untested

Exception Reporting		9	0	0	9
Final Report Output		4	0	0	4
Version Control		2	0	0	2

10 . ADVANTAGES & DISADVANTAGES

10.1 ADVANTAGES

- Our system helps customers to upgrade their safety and protect life and property from reputed accidents.

- We can able to observe the amount of the gas and also the gas leak.

- By this system, the users can be aware of their gas level and it also avoids the prior and delay booking of the cylinder.

- The system is much more efficient and also the sensor used in the system MQ-6, is in constant d detection of any change in the environment. Immediate action is taken if there is an accidental leakage insuring 100% safety.

- The proposed system helps the LPG gas customers to lead a pleasant life

- Tiny size compared with other types of load cells.
- Very little influence because of temperature changes.
- Extremely precise and linear measurements

10.2 DISADVANTAGES

- Detected Any Moisture
- Will not Find Very small Leak
- Accuracy of Location need to be carefully verified

11. CONCLUSION

Gas leaks cause serious disasters that result in property damage and human injuries. The main causes of gas leaks are poor equipment upkeep and a lack of public awareness. As a result, detecting LPG leaks is critical for avoiding accidents and saving human lives. This paper discussed a system for detecting and alerting LPG leaks. Whenever LPG leakage is detected, this device activates an LED and a buzzer to inform people. This approach is straightforward but dependable.

Internet of Things has gained its wide popularity in recent days due to its various streams of applications which has paved way for smooth, safe and easier mode of living style for human beings. One such area of applications includes gas booking and gas leakage detection for both domestic and commercial purposes. Though, several techniques is existing for the same, yet gas leakage detection is one major concern and a challenge

The new proposed system which is microcontroller based application of gas booking and gas detection systems using IOT. The sensor used in this model can sense and detect the leakage of the gas and the user gets notification regarding gas leakage and can

also monitor the cylinder weight it can be taken to pre-book the new cylinder automatically. This proposed system can be useful in marketing sectors like hotels, shop etc. Themain intention of this work is to ensure safe andeasier way of gas booking and gas leakage detection to avoid disasters that may occur dueto negligence.

12.FUTURE SCOPE

In the future, instead of using AC power, the gas leakage detecting system might be created using photovoltaic panels with a battery as a backup power supply to give a continuous supply, as opposed to the current use of AC power. The protection system employs a combination of MQ6 gas sensors, DHT22 temperature sensors, load sensors, smoke and flame sensors, and PIR sensors. A number of sensors must be calculated, taking into account the room's volume, installation position, and other factors. This system assures that if a gas leak happens, it can be tracked more effectively and that occupants may be notified ahead of time, regardless of whether the leak is visible or not, whether the house is vacant or occupied. The best recommendation for a monitoring system is to utilize a WiFi module that allows the user to monitor the gas level in real-time and automate direct management of the safety device system if an unanticipated occurrence occurs. Finally, the safety device employed was

the most vital and important aspect. We also suggested that a tripper circuit be built, which would automatically turn off the (MSB) in the event of a fire, and turn off the gas regulator valve via a solenoid valve either from the cylinder from the main switchboard, If an incident occurs, it automatically can switch on the exhaust fan to suck gas to the outside houseand sound an alarm and audio buzzer to inform the user or persons around and the user can opening the window, This device monitors the gas and detects any leaks in order to keeppeople safe.

13 APPENDIX

SOURCE CODE:

Detect the gas Leakage

```
#include<Servo.h>
#include <TinyGPS++.h>
#include <SoftwareSerial.h>
#include<LiquidCrystal_I2C.h>
LiquidCrystal_I2C lcd(32, 16, 2);
int GPSBaud = 9600;
TinyGPSPlus gps;
SoftwareSerial sgps(13, 15); //Rx , Tx gps
SoftwareSerial sgsm(3, 1); // Rx , Tx gsm
#define KNOB 3
#define  LEVER  2
Servo  myservo;  int
gas   =   A5;   int
sensorValue  =  0;
bool  gateClosed  =
true;


void setup()
```

```
{
  Serial.begin(9600);
  pinMode(LEVER, INPUT);
  myservo.attach(KNOB);
  myservo.write(90);
  sgsm.begin(9600);
  sgps.begin(9600);
  lcd.init();        lcd.clear();
  lcd.backlight();
  lcd.setCursor(3,0);
  lcd.print("GAS
  LEAKAGE");
  lcd.setCursor(4,1);
  lcd.print("DETECTION");
  delay(3000);      lcd.clear();
  lcd.setCursor(0,0);
  lcd.print("Gas Value: ");
}

void loop()
{
  sensorValue = analogRead(gas);
  Serial.println(sensorValue); if(sensorValue
  > 500 && !gateClosed)
  {

```

```
    Serial.println("GAS     DETECTED");
   lcd.setCursor(0,1);      lcd.print("GAS
   DETECTED  "); sendSMS("GAS  IS
   DETECTED!!");     myservo.write(90);
   gateClosed = true; sendSMS("THE
   KNOB IS CLOSED");
   lcd.setCursor(0,1); lcd.print("KNOB
   IS CLOSED"); delay(1000);
  }
  else if(sensorValue > 500 && gateClosed)
  {
   Serial.println("GAS                DETECTED");
   lcd.setCursor(0,1); lcd.print("GAS DETECTED ");
   sendSMS("GAS        IS        DETECTED!!");
   sendSMS("THE KNOB IS ALREADY CLOSED");
   lcd.setCursor(0,1);      lcd.print("KNOB      IS
   CLOSED");

   delay(1000);
  }
  else
  {
   byte buttonState = digitalRead(LEVER); if(buttonState
   == HIGH)
   {
```

```arduino
    myservo.write(0);   gateClosed   =
    false;      Serial.println("GATE      IS
    OPENED");
   }
   else
   {
    myservo.write(90);  gateClosed   =
    true;      Serial.println("GATE      IS
    CLOSED");
   }
 }
}
void sendSMS(char*message)
{
  while (sgps.available() > 0)
   if (gps.encode(sgps.read()))
   {
    if (gps.location.isValid())
    {
     sgsm.listen(); sgsm.print("\r"); delay(1000);
     sgsm.print("AT+CMGF=1\r"); // AT COMMAND TO SEND
     SMS delay(1000);
     /*Replace XXXXXXXXX to 10 digit mobile number & ZZ
     to 2 digit country code*/
     sgsm.print("AT+CMGS=\"+919025681637\"\r"); // REGISTERED
NUMBER TO SEND SMS delay(1000);
```

```
      //The text of the message to be sent.

      sgsm.print(message);

      sgsm.print("https://www.google.com/maps/?q="); //

      MAPS sgsm.print(gps.location.lat(), 6); // LAT

      sgsm.print(","); sgsm.print(gps.location.lng(), 6); // LONG

            delay(1000); sgsm.write(0x1A); delay(1000);

   }

  }

}
```

For sending latitude and longitude details to IBM Watson IOT platform

```
#include <WiFi.h>
#include <PubSubClient.h>

#include <ArduinoJson.h>

WiFiClient wifiClient;

#define ORG "mz6rat"
#define DEVICE_TYPE "ESP8266"
#define DEVICE_ID "12345"
#define TOKEN "123456789" #define
speed 0.034

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char  topic[]  =  "iot-2/cmd/home/fmt/String";
char  authMethod[]  =  "use-token-auth";  char
token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
```

```cpp
PubSubClient client(server, 1883, wifiClient); void
publishData();

const int trigpin=5; const
int echopin=18;
String command;
String data="";
String lat="13.356563";
String lon="80.141428";
String name="point1";
String icon="fa-fire";

long duration; int
dist;

void setup()
{
  Serial.begin(115200);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
  wifiConnect();
  mqttConnect();
}

 void loop() {
publishData();
  delay(500);
if (!client.loop()) {
  mqttConnect();
  }
}

 void wifiConnect() {
```

```cpp
    Serial.print("Connecting to "); Serial.print("Wifi");
    WiFi.begin("Wokwi-GUEST",    "",    6);    while
    (WiFi.status() != WL_CONNECTED) {
     delay(500);
     Serial.print(".");
    }
    Serial.print("WiFi connected, IP address: "); Serial.println(WiFi.localIP());
}

void mqttConnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting MQTT client to "); Serial.println(server);
    while (!client.connect(clientId, authMethod, token)) {
    Serial.print("."); delay(1000);
    }
    initManagedDevice();
    Serial.println();
  }
}

void initManagedDevice() {
  if (client.subscribe(topic)) {
     Serial.println(client.subscribe(topic));
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}
void publishData()
{
  digitalWrite(trigpin,LOW);
  digitalWrite(trigpin,HIGH);
  delayMicroseconds(10);
  digitalWrite(trigpin,LOW);
  duration=pulseIn(echopin,HI
```

```
GH); dist=duration*speed/2;
dist=dist/4; dist=100-dist;
if(dist>80){ lat="13.356563";
lon="80.141428";
}else{ lat="0.000000";
  lon="0.000000";
}
DynamicJsonDocument doc(1024);
String payload;
doc["Name"]=name;
doc["Latitude"]=lat;
doc["Longitude"]=lon;
doc["Icon"]=icon;
doc["GasPercent"]=dist;
serializeJson(doc, payload);
delay(3000);
Serial.print("\n");
Serial.print("Sending payload: ");
Serial.println(payload); if (client.publish(publishTopic,
(char*) payload.c_str())) {
  Serial.println("Publish OK");
} else {
  Serial.println("Publish FAILED");
}
}
```

GITHUB AND DEMOLINK:

GITHUB:

https://github.com/IBM-EPBL/IBM-Project-30325-1660144076

VIDEO LINK:

[https://drive.google.com/file/d/1voDyan1PIFKfJvY xX-HcnBMN35TOn5DF/view?usp=share_link](https://drive.google.com/file/d/1voDyan1PIFKfJvY%20xX-HcnBMN35TOn5DF/view?usp=share_link)