



EASWARI ENGINEERING COLLEGE

(AUTONOMOUS)

RAMAPURAM CHENNAI- 600089

NOVEMBER 2022

**DEPARTMENT OF ELECTRONICS AND COMMUNICATION
ENGINEERING**

**PROJECT BASED EXPERIENTIAL LEARNING PROGRAM
(NALAIYA THIRAN)**

**GAS LEAKAGE MONITORING AND ALERTING
SYSTEM**

A PROJECT REPORT

TEAM ID : PNT2022TMID54370

Submitted by

Manoj A S (310619106072)

Manoj kumar C (31061910674)

Meera sahib maraikar SS (310619106075)

Narendra Kumar R (310619106086)

PROJECT REPORT FORMAT

1. INTRODUCTION

- a. Project Overview
- b. Purpose

2. LITERATURE SURVEY

- a. Existing problem
- b. References
- c. Problem Statement Definition

3. IDEATION & PROPOSED SOLUTION

- a. Empathy Map Canvas
- b. Ideation & Brainstorming
- c. Proposed Solution
- d. Problem Solution fit

4. REQUIREMENT ANALYSIS

- a. Functional requirement
- b. Non-Functional requirements

5. PROJECT DESIGN

- a. Data Flow Diagrams
- b. Solution & Technical Architecture
- c. User Stories

6. PROJECT PLANNING & SCHEDULING

- a. Sprint Planning & Estimation
- b. Sprint Delivery Schedule
- c. Reports from JIRA

7. CODING & SOLUTIONING (Explain the features added in the project along with code)

- a. Feature 1
- b. Feature 2
- c. Database Schema (if Applicable)

8. TESTING

- a. Test Cases
- b. User Acceptance Testing

9. RESULTS

- a. Performance Metrics

10. ADVANTAGES & DISADVANTAGES

11. CONCLUSION

12. FUTURE SCOPE 13 APPENDIX

Source Code

GitHub & Project Demo Link

1.INTRODUCTION

1.1Project Objective

By the end of this project you will:

1. Gain knowledge of Watson IoT Platform.
2. Connecting IoT devices to the Watson IoT platform and exchanging the sensor data.
3. Gain knowledge on IBM Cloudant DB • Explore Python client libraries of Watson IoT Platform.
4. Explore Python library for integrating OpenCV for accessing the Live Camera Input
5. Scan the QR code in live streaming and retrieve the QR code details
6. Gain knowledge of web application development.
7. Gain knowledge of storing the data in Cloudant DB
- Generating QR codes with the required data.

1.2 Project Flow

1. The parameters like hazardous gas levels, fire, humidity, and temperature data are published to the Watson IoT platform
2. The device will subscribe to the commands from the application and take decisions accordingly to switch on the rainwater sprinkler in case of emergencies
3. Sensor data is visualized in the Web Application

To accomplish this, we have to complete all the activities and tasks listed below:

4. Create and configure IBM Cloud Services
 - o Create IBM Watson IoT Platform and Device
 - o Create Node-RED service
5. Develop the Python Script
 - o Develop the Python Script
6. Develop a web Application using Node-RED Service.
 - o Develop the Web application using Node-RED
 - o Testing the Web UI by giving the required inputs

2 . LITERATURE SURVEY

LITERATURE 1:

IOT BASED HOME SAFETY GAS LEAKAGE DETECTION AND AUTOMATIC BOOKING SYSTEM:

Internet of things try towards making life less complex what's more, quicker via robotizing the whole little errands related with the life of human. Today, everything is getting keen because of the innovative advancement, for example, of IOT. As IOT is valuable for robotizing the assignments, the upside of IOT can likewise be far reaching for improving the helpful security strategies. Security plays a significant role while constructing home, buildings, industries as well as towns. The enlarged focus of certain gases in the environment can be exceptionally unsafe, in recent time, everyone needs a facility which reduces time and effort and expect their work to be as easy as possible. One such region where man wants to get the work quicker and simpler is cooking. Most ordinarily LPG is utilized for cooking reason which was presented by Dr.Walter Snelling. It is a amalgamation of propane and butane alongside soaked substance notwithstanding unsaturated hydrocarbon substance. Gas undertakings utilizes SMS, IVRS or Online reserving for the LPG, which is tedious strategies in individuals' day by day life. However, due to fast nature and high competition, today people look for smarter way of operations than tedious and mechanical as well as manual routine. As such, booking gas has also become one of the

tasks where one has tendency to either postpone or forget its booking due to busy schedule and lack of time.

Usually in home or industries, most of the disaster happens due to gas leakages, which leads to several accidents and also causes human life. In order to handle such situation, the proposed gas leakage detection and monitoring system is developed and put forth in this paper. In this layout MQ-6 sensor is used to detect and sense the gas leakage and the temperature sensor is also placed to reduce the false deduction. This proposed system is not only capable of Sensing or detecting the gas leakages as well as alerting the user about the gas leakage by buzzer alarm and also displaying alert message in LCD display simultaneously switch on the exhaust fan and start the stepper motor, external coupling is made to turn off the gas regulator. PIR sensor also placed in the home to notify about the human presence.

LITERATURE 2:

ARDUINO BASED GAS LEAKAGE DETECTION SYSTEM USING IOT:

It has become important factor nowadays to bring the technology into our home and office. By making the place smart, the day-to-day activities are becoming more and easier. The development of home automation has become mandatory in homes as people are moving towards to the smart home concepts. The supply gas will also be stopped with the use of solenoid, ultimately preventing the chance of accident. This system will not only able to detect the leakage of gas but also alerting through audible alarms. Presence of excess amounts of harmful gases in environment then this system can notify the user.

System can notify to society admin about the condition before mishap takes place through a message. This system will not only able to detect the leakage of gas but also alerting through audible alarms. Presence of excess amounts of harmful gases in environment then this system can notify the user. The people in the neighbors can also be included in case of an emergency. LPG gas sensor is used for input. A buzzer is connected along with the circuit to indicate the use of the output.

LITERATURE 3:

IOT BASED DETECTION OF LEKAGAES IN GAS PIPES:

The Internet of things (IOT) is the network of electronic devices, which are related to embedded systems and also other domains through the internet. Liquids and gases are mostly transported in pipelines like oil, natural gases, biofuels and water. It is necessary to check whether the pipes are good enough without cracks. The cracks may lead to disasters. There is a real life incident which needs to be taken seriously. This project might help to get aware of it. The cruel incident took place in Tlahuelilpan town situated in Mexican state. On 18, Jan 2019 a pipeline transporting gasoline exploded taking the life of 96 people and a lots of people gets injured. Pipeline monitoring, control, operation and maintenance are very important activities, which have evolved considerably. The detection and behavior of leaks has deserved special attention by different researchers.

This paper deals with the detection of leakages in gas pipes and thus reducing the man power

LITERATURE 4:

A SMART NATURAL GAS LEAKAGE DETECTION AND CONTROL SYSTEM FOR GAS DISTRIBUTION COMPANIES OF BANGLADESH USING IOT:

This project proposes a smart mobile based model of gas leakage detection and control for gas distribution system of Bangladesh using

IoT, called as smart natural gas leakage detection and control system (SNLDCS). The proposed SNLDCS has been implemented in both software and hardware modules. The existing researches are about Liquefied Petroleum Gas (LPG) leakage detection that are used for cylinder gas. Hence, these models are not suitable for gas distribution companies of Bangladesh where natural gas leakage is being controlled from remote places. But the proposed model can quickly detect natural gas leakage by continuous monitoring and can control gas leakage by a smart phone from anywhere. The experimental results confirm that, implementation of SNLDCS model in gas distribution system in Bangladesh can provide the quickest detection and rapid resolve of gas leakage. As a result, it will increase safety, decreases system loss and reduces Greenhouse Gas (GHG) emission in the air.

LITERATURE 5:

DETECTION OF GAS LEAKAGE IN POLYMER INDUSTRIES USING

IOT:

Gases leaked from polymer and carbide industries are very harmful to all living things. Major disaster happened at Bhopal on December 3, 1984. Recently an industrial accident occurred at LG polymers chemical plant in the Vishakapattinam. As per the National Disaster Response Force (NDRF), the death toll was 11, and more than 1,000 people became sick after being exposed to the gas. To prevent from these types of accidents, safety system should build in high quality standards. Safety should be ensured by all levels. To incorporate technology in the Safety System, Internet of Things (IoT) technology is used to detect the gas leakage and prevent the disaster before it happened. Internet of Things [IoT] is a system of interrelated computing devices without human – human or human – computer interaction. IOT is used to automating the daily tasks, the benefits of IOT can also be extended for enhancing the existing safety standards.

Safety is the most important criterion while designing polymer industries. The spread of highly concentrated gases in the atmosphere can produce extremely dangerous condition. These gases might be flammable at certain temperature and humidity conditions, toxic after exceeding the specified concentrations limits or even a contributing factor in the airpollution of an area leading to problems such as smoke and reduced visibility which can in turn cause several accidents and also have adverse effect on the health of people.

2.1 PROBLEM STATEMENT

1. How does the Problem affect?

The main consequences are the emission of flammable substances into the environment, fire, explosion, and distribution of toxic substance. Serious risks of carbon monoxide poisoning in people and animals.

2. What is the issue?

Improper use of gas furnace, stove, or appliance. Fault in the gas pipeline

3. What is the impact of the issue?

Create potential hazards for the workers in the industry

Create Pollution to environment Diseases prone

4. What would happen if this problem is not solved?

Emission of toxic gases which is harmful to the environment Leads to explosion or other types of fire hazard Rusted and poor pipelines creates hazard.

5. What would happen if this problem is fixed?

Identifying and solving the issue parameters like pollution and spreading of poisonous gas ,we can fix the problem.


6. Why it is important to fix the problem?


Emission of harmful gases leads to varying of environmental weather and affects the earth layer which is protected by the UV radiation

3 . IDEATION AND PROPOSED SOLUTION

3.1 Empathy map

3.2 Ideation

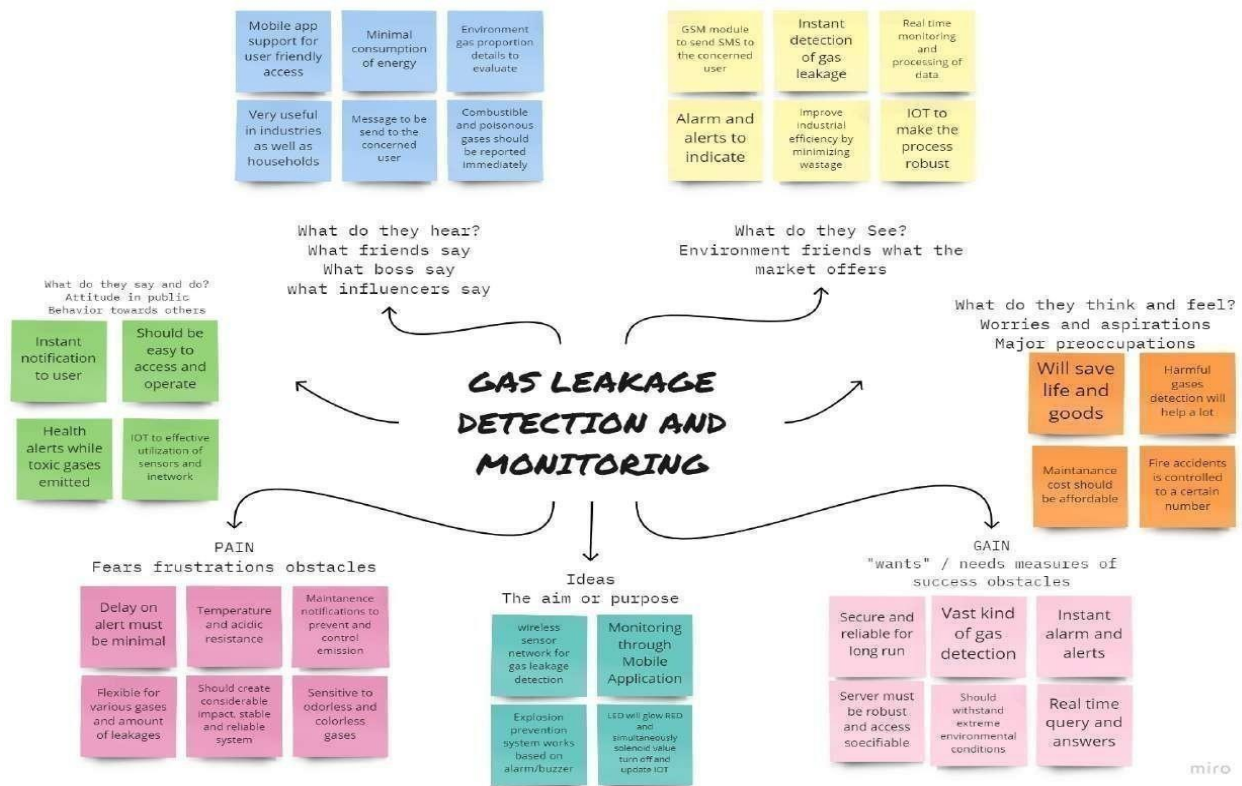

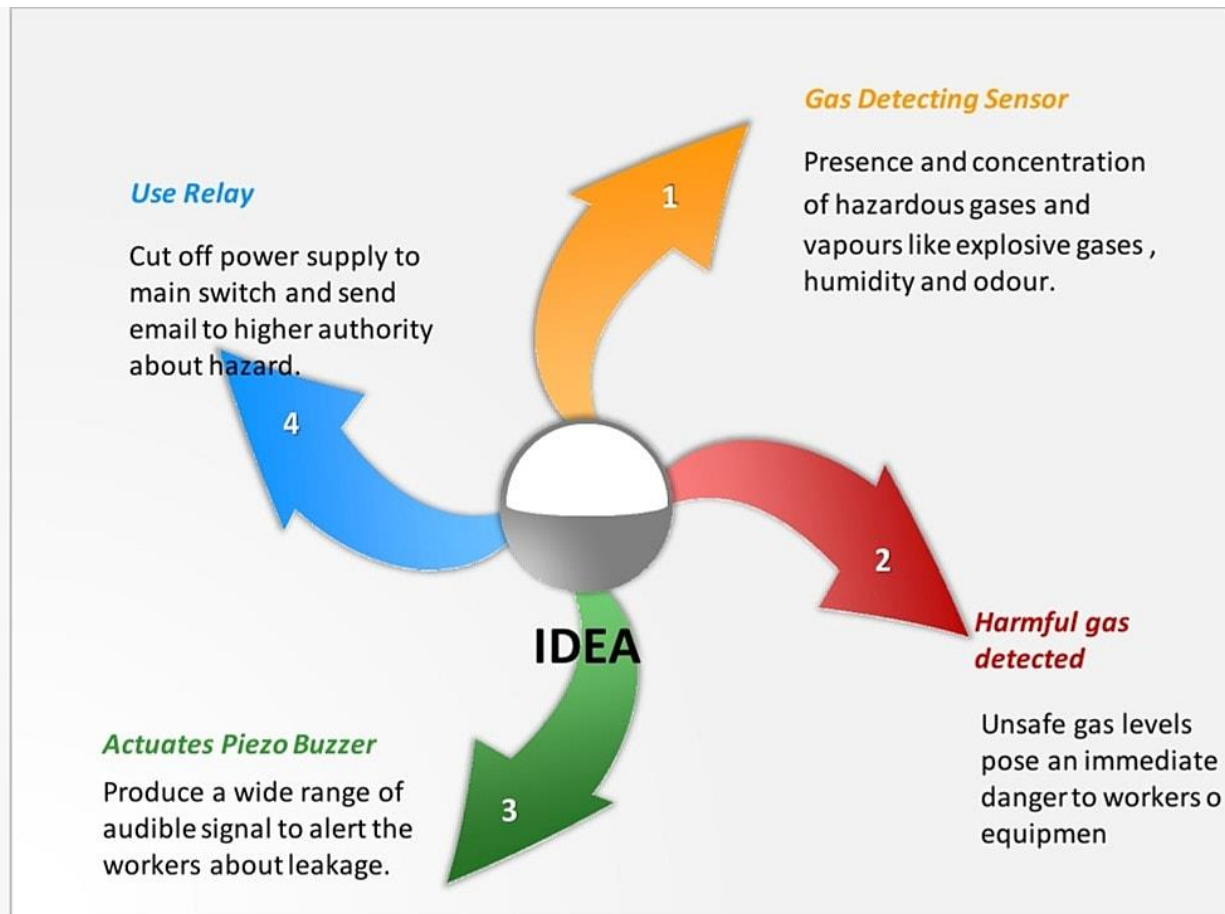

3.3 Proposed Solution

Proposed Solution:

S.No.	Parameter	Description
1.	Problem Statement (Problem to be solved)	<ul style="list-style-type: none"> Leaks are considered very dangerous since they can build into an explosive concentration So the proposed solution is used for the development for an efficient system & an application that can monitor and alert the workers

2.	Idea / Solution description	<ol style="list-style-type: none"> 1. In several areas, the gas sensors will be integrated to monitor the gas leakage 2. The proposed system takes an automatic control action after the detection of 0.001% of LPG leakage. 3. This automatic control action provides a mechanical handle driven by stepper motor for closing the valve 4. We are increasing the security for human by using the combination of a relay and the stepper motor which will shutdown the electric power of the house .Also by using a GSM module, we are sending an alert message by SMS (Short messaging services) to warn the
----	------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

		<p>users about the LPG leakage and a buzzer is provided for alerting the neighbors in case of the absence of the users about the LPG leakage</p> <ul style="list-style-type: none"> ○ The main advantage of this system over the manual method is that, it does all the process automatically and has a quick response time.
3.	Novelty / Uniqueness	<ul style="list-style-type: none"> ○ User friendly ○ Pioneering study of natural gas

detection with CCD
in visible
range

4.	Social Impact / Customer Satisfaction	<ol style="list-style-type: none">1. Cost efficient2. Easy installation and provide efficient results.
5.	Business Model (Revenue Model)	<ol style="list-style-type: none">1. With widespread deployment of the urban natural gas industry, the energy security is now becoming one of the priorities in practice.2. The gas leakage model was applied to analyse the pressure, temperature and flow rate of gas leakage over time under both the steady-state and dynamic conditions.3. As the product usage can be understood by everyone, it is easy for them to use it properly for their safest organization.
6.	Scalability of the Solution	<ol style="list-style-type: none">1. Establishing fast communication equipment with the nearest fire station and other relief station to have the fastest response in case of an accident.2. Even when the gas leakage is more, the product sense the accurate values and alerts the workers effectively

3.4 Problem Soutlion Fit

1.CUSTOMER SEGMENTS <ul style="list-style-type: none"> □ For industry owner -Ensuring the safety of workers is the main thing. □ Sometimes it is hard to identify the area where the leakage occurs. □ The detection of leakage prevents the loss of lives 	6. CUSTOMER CONSTRAINTS <ul style="list-style-type: none"> □ Proper maintenance should be taken atleast once in a month and this prevents the customers from taking actions in gas leakage problem. 	5. AVAILABLE SOLUTIONS <ul style="list-style-type: none"> □ Usage of sensors to sense gas Leakage. □ Buzzer to indicate the leakage. □ GSM module helps us to get notification when there is a gas leakage.
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

2. JOBS-TO-BE-DONE / PROBLEMS <ul style="list-style-type: none"> ✓ Capability of the device to withstand in harsh environment is questionable. ✓ Due to network issue data couldn't be uploaded to the cloud at all times. 	9. PROBLEM ROOT CAUSE <ul style="list-style-type: none"> ✓ Sometimes sensor doesn't work properly which can cause the major problem. ✓ Location of the device installation and the network plan used by the user are the root cause of the network issue. 	7. BEHAVIOUR <ul style="list-style-type: none"> ✓ Network issue is very common as most of the industries are located at the country side. Here contact both the developers and the service providers. ✓ To determine the gas characteristics and solve the issue, they will locate the leak and identify the warning.
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

3.TRIGGERS <ul style="list-style-type: none"> ✓ Accidents due to gas leakages and loss of physical property and life. ✓ Safe precautions for the workers to work without fear. 	10. YOUR SOLUTION <ul style="list-style-type: none"> ✓ Low cost IOT based device that can be easily accessed and fixed by people. ✓ Network strength must be boosted in the device. ✓ Device can be manufactured in multiple standards based on the environment. 	8. CHANNELS OF BEHAVIOUR <p>ONLINE</p> <ul style="list-style-type: none"> ✓ Monitor the status of the sensors ✓ Notification incase of any gas leakage. <p>OFFLINE</p> <ul style="list-style-type: none"> ✓ Prevent physical damage to sensor. ✓ Provide proper network and power supply to sensors. ✓ Complaint letters.
4.EMOTIONS:Before/After <ul style="list-style-type: none"> ✓ Before the action is taken the user feels deceived and cheated. ✓ After the problem is resolved user feels the sincerity of the developer 		

1. .REQUIREMENT ANALYSIS

a. Functional

b. Non-Functional Requirements

Functional Requirements:

Following are the functional requirements of the proposed solution.

FR No.	Functional Requirement (Epic)	Sub Requirement (Story / Sub-Task)
FR-1	User Registration	Registration through Form Registration through Gmail Registration through LinkedIN
FR-2	User Confirmation	Confirmation via Email Confirmation via OTP
FR-3	Hardware Requirement	Optical Soil Ultra-Sonic Flow Meter
FR-4	Software Requirement	Flow change Pressure point Statistic
FR-5	User Welfare	Calibration No Poisoning of the Sensor Reliable in All Environmental Conditions Easy to Use

Non-functional Requirements:


Following are the non-functional requirements of the proposed solution.

FR No.	Non-Functional Requirement	Description
NFR-1	Usability	The sensor-enabled solution helps prevent the highrisk of gas explosions and affecting any casualties within and outside the premises
NFR-2	Security	The device is intended for use in household safety where appliances and heaters that use natural gas and liquid petroleum gas (LPG) may be a source ofrisk.

NFR-3	Reliability	Gas Leakage Detection System (GLDS) can detect leakage at homes, commercial premises or factories. GLDS detects the leakage soon after it happened and sends users an immediate alarm on the incident.
NFR-4	Performance	The Gas Leakage Detector is a wall mounted device fitted close to the floor level with an alarm setting at 20% of lower explosive limit. Whenever there is a leak, the in-built sensor detects and alerts the user in less than 5 minutes, much before it can cause any accidents
NFR-5	Availability	The circuit for an LPG leakage detector is readily available in the market, but it is extremely expensive. Presented here is a low-cost circuit for a Gas Leakage Detection that you can build easily.
NFR-6	Scalability	The system proves the need for gas detection alarm systems to be 100% reliable. A backup power supply can be included in the system design to augment for power failure condition. Also, calibration of the gas sensor can be done in order for a specific gas to be sensed instead of the LPG numerous gases it sense


5. PROJECT DESIGN

5.1 Data Flow Diagrams

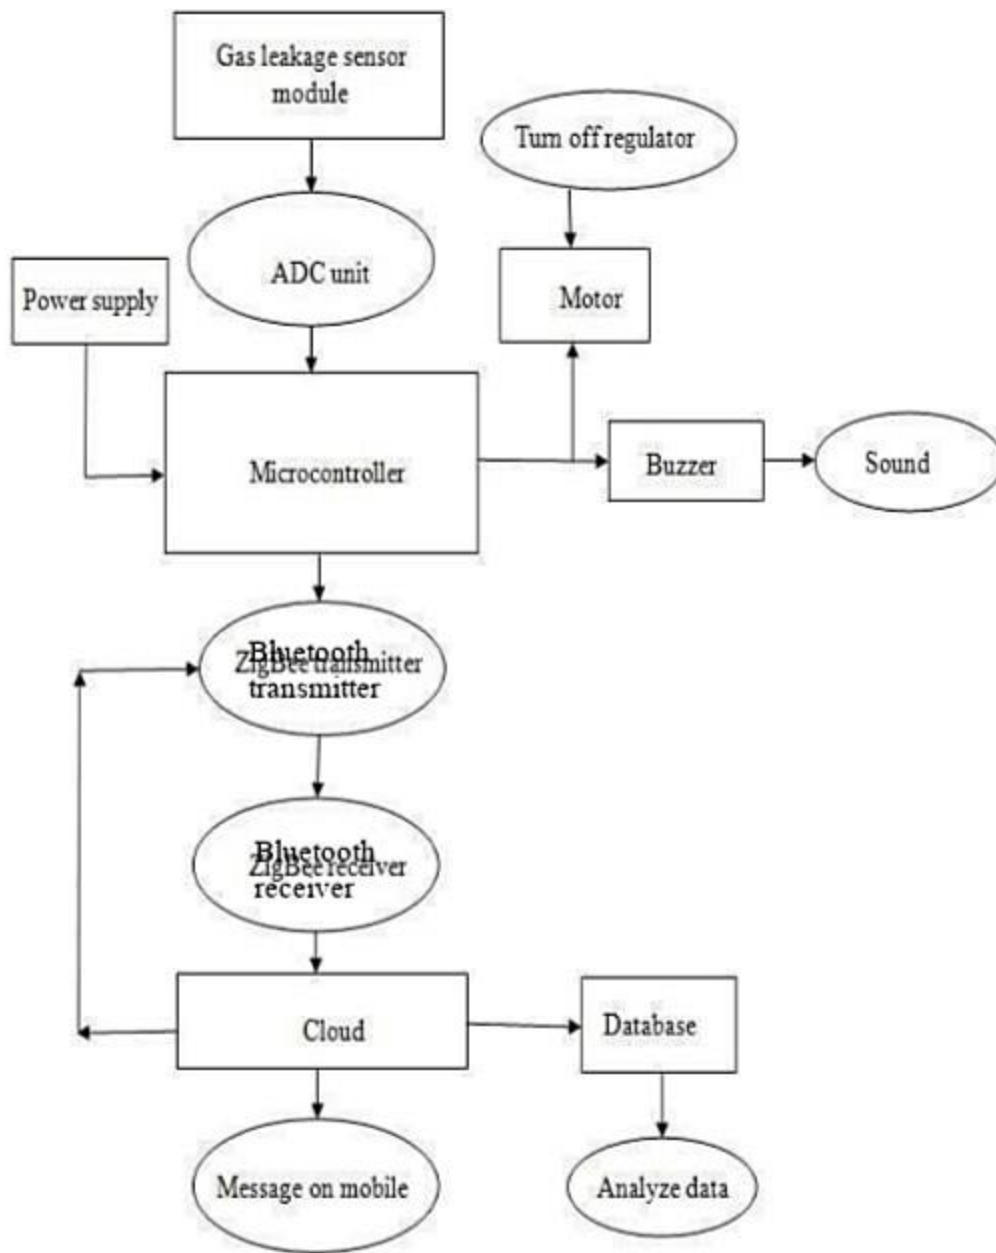

5.2 Solution and Technical Architecture

5.3 User Stories

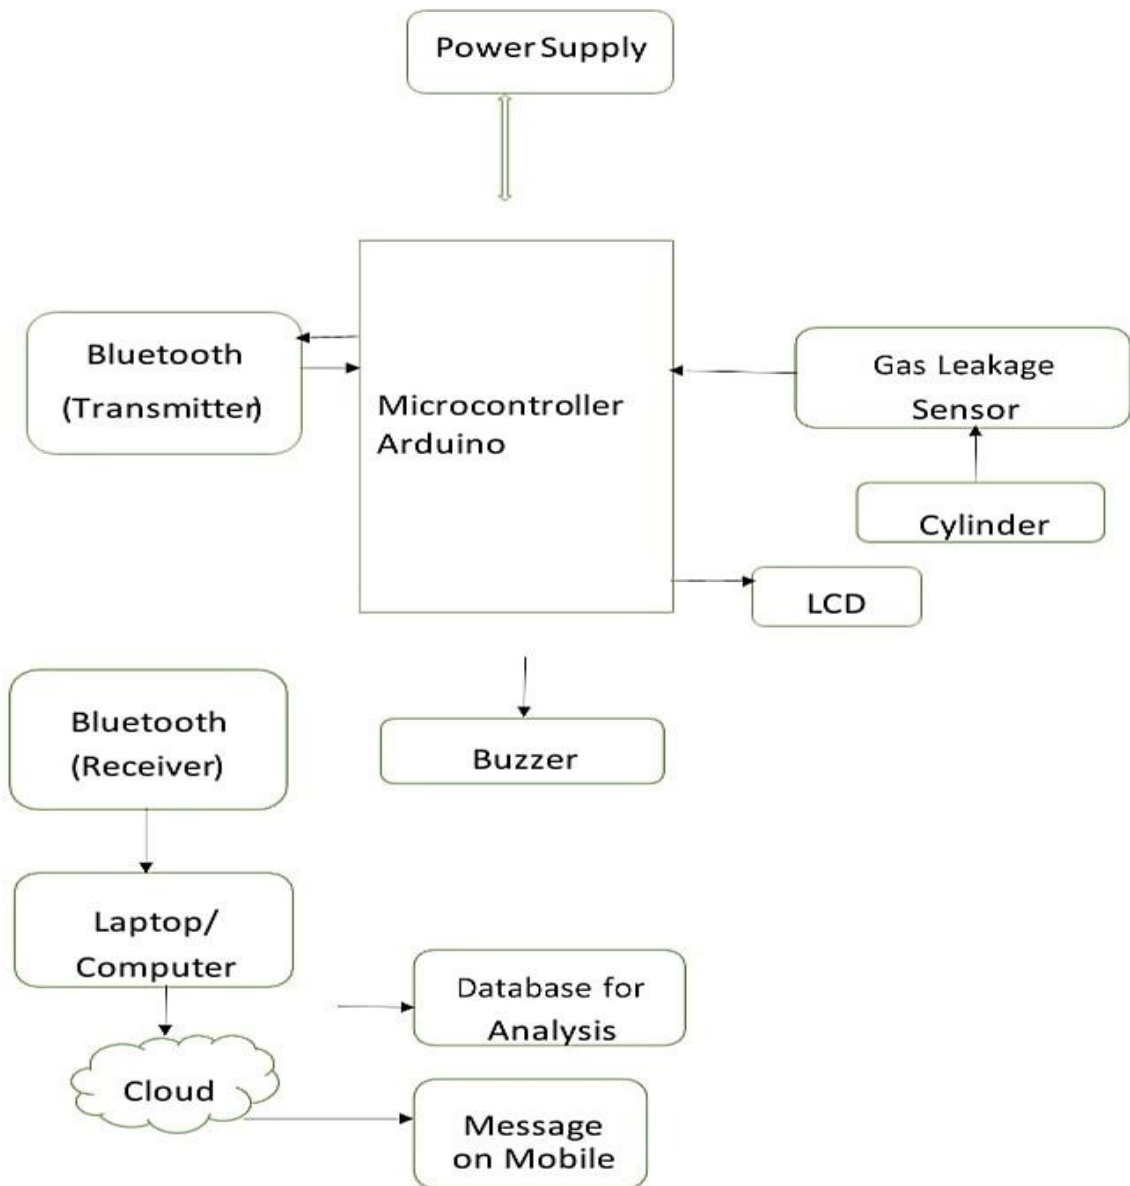

JOURNEY STEPS	DISCOVERY	REGISTRATION	ONBOARDING	SHARING
Which step of the are you journey?	Why do they even start the successful? others? describing?	Why would they trust us?	How can they feel	Why would they invite experience
ACTIONS	Leakage of the gas is detected details to reach them	To share their contact functioning and faulty authenticity	Check for well Check for devices	What does the customer Test device before sharing
do? What they expect?	Type of the gas leaked is detected	out To prioritize delivery	Ensure all specifications are met	
NEEDS AND PAINS	To prevent future disaster about the device and long life	Completely know society want to achieve and	Achieve maintenance	A way of helping
What does the customer what to avoid?	Network failure & human errors	Not being customer friendly	Looks down on expensive	Efforts going unrecognized
TOUCHPOINT	Through IOT connected	Website	Database	Contractors

6.PROJECT PLANNING AND SCHEDULING

6.1Sprint Planning And Estimation

Product Backlog, Sprint Schedule, and Estimation (4 Marks)

Sprint	Functional Requirement (Epic)	User Story Number	User Story / Task	Story
--------	-------------------------------	-------------------	-------------------	-------

Sprint-1	Objective	USN-1	As a system, the gas sensor should detect the gas	
Sprint-1	Features	USN-2	As a system, the gas sensor values displayed on LCD	
Sprint-1	Features	USN-3	As a system, when gas reaches the threshold value, Red color LED will glow	
Sprint-1	Features	USN-4	As a system, then Siren will ON	

Sprint	Functional Requirement (Epic)	User Story Number	User Story / Task	Story
Sprint-2	Focus	USN-5	As a system, it should send location to the user where gas leakage is detected	
Sprint-2	Focus	USN-6	As a program, it should send alerting SMS to the registered mobile number	
Sprint-2	Features	USN-7	As a system, the gas pipe should be closed automatically once it attains threshold.	
Sprint 3	Data Transfer	USN-8	As a program, it should retrieve API key of the IBM cloud to send the details	
Sprint 3	Data Transfer	USN-9	As a system, it should send sensor values along with latitude and longitude to IBM cloud and to NodeRed	
Sprint 3	Data Transfer	USN-10	As an application, it should display the gas level details to the user through frontend mit app	8

Sprint	Functional Requirement (Epic)	User Story Number	User Story / Task	Story
--------	-------------------------------	-------------------	-------------------	-------

Sprint-4	Registration	USN-11	As a user, I must receive confirmation mail and SMS on registration	
Sprint-4	Dashboard	USN-12	As a user, I can login into the web application through email and password.	
Sprint-4	Dashboard	USN-13	As a user, I can access the dashboard and make use of available resources.	
Sprint 4	Focus	USN-14	As a user, I must receive an SMS once the leakage is detected.	
Sprint-4	Allocation	USN-15	As an admin, I must receive information about the leakage along with location and share exact location and route to the person. I must allot particular person to look after the leakage in a particular location.	

Project Tracker, Velocity & Burndown Chart: (4 Marks)

Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed Planned E
Sprint-1	20	6 Days	24 Oct 2022	29 Oct 2022	
Sprint-2	20	6 Days	31 Oct 2022	05 Nov 2022	
Sprint-3	20	6 Days	07 Nov 2022	12 Nov 2022	
Sprint-4	20	6 Days	14 Nov 2022	19 Nov 2022	

Velocity:

Imagine we have a 10-day sprint duration, and the velocity of the team is 20 (points per sprint). Let's calculate the team's average velocity (AV) per iteration unit (story points per day)

Burndown Chart:

A burn down chart is a graphical representation of work left to do versus time. It is often used in agile software development methodologies such as Scrum.

However, burn down charts can be applied to any project containing measurable progress over time.

<https://www.visual-paradigm.com/scrum/scrum-burndown-chart/>
<https://www.atlassian.com/agile/tutorials/burndown-charts>

SPRINT 1

In Sprint 1, the sensor reads the gas value , and if it is above the threshold, the RED led will glow and Buzzer will ON.

If the sensor value is between the low level and threshold, Yellow color LED will glow.

Otherwise, if it is very lower than threshold, the Green color LED will glow.

CODE:

```
#include<LiquidCrystal_I2C.h
> LiquidCrystal_I2C lcd(32,
16, 2); int green = 2; int
yellow = 3; int red = 4; int
siren = 5; int gas = A0; int
sensorValue = 0; void setup()
{
  Serial.begin(9600);
  lcd.init();
  lcd.clear();
  lcd.backlight();
```

```
lcd.setCursor(3
,0);
lcd.print("GAS
LEAKAGE");
lcd.setCursor(4,1);
lcd.print("DETECTION");
delay(3000); lcd.clear();
lcd.setCursor(0,0);
lcd.print("Gas Value: ");
pinMode(green,
OUTPUT);
pinMode(yellow,
OUTPUT);
pinMode(red,
OUTPUT);
pinMode(siren,
OUTPUT);
digitalWrite(red, LOW);
digitalWrite(yellow,
LOW);
digitalWrite(green,
LOW);
}
void loop()
```

```

{
    sensorValue =
    analogRead(gas);
    Serial.println(sensorValue);
    lcd.setCursor(11,0);
    lcd.print(sensorValue);
    if(sensorValue > 500)

    {
        lcd.setCursor(0,1);
        lcd.print("GAS
        DETECTED");
        digitalWrite(red,  HIGH);
        digitalWrite(yellow,
        LOW); digitalWrite(green,
        LOW); tone(siren, 200);
    }
    else if(sensorValue > 281 && sensorValue < 500)
    {
        lcd.setCursor(0,1);
        lcd.print("  ");
        digitalWrite(yellow,
        HIGH);
        digitalWrite(red,

```



```

LOW);
digitalWrite(green,
LOW); noTone(siren);
}
else
{
  lcd.setCursor(0,1);
  lcd.print("  ");
  digitalWrite(green,
HIGH);
  digitalWrite(red,
LOW);
  digitalWrite(yellow,
LOW); noTone(siren);
}
delay(1000);
}

```

Thus Sprint 1 is successfully completed.

SPRINT 2

In Sprint 2, the sensor value is above 500, it will check the gate condition whether it is open or close.

The Servo motor controls the knob of the gate.

If the value is above the threshold, it will send the message “Gas Detected”

CODE:

```
#include<Servo.h>

#include <TinyGPS++.h>

#include <SoftwareSerial.h>

#include<LiquidCrystal_I2C.h
> LiquidCrystal_I2C lcd(32,
16, 2); int GPSBaud = 9600;

TinyGPSPlus gps;

SoftwareSerial sgps(13, 15); //Rx , Tx gps
SoftwareSerial sgsm(3, 1); // Rx , Tx gsm

#define KNOB 3

#define LEVER 2

Servo myservo;

int gas = A5; int
sensorValue = 0;

bool gateClosed =
true;


void setup()
{
    Serial.begin(9600);

    pinMode(LEVER, INPUT);
```

```
myservo.attach(KNOB);  
myservo.write(90);  
sgsm.begin(9600);  
sgps.begin(9600);  
lcd.init();  
lcd.clear();  
lcd.backlight();  
lcd.setCursor(3  
,0);  
lcd.print("GAS  
LEAKAGE");  
lcd.setCursor(4,1);  
lcd.print("DETECTION");  
delay(3000); lcd.clear();  
lcd.setCursor(0,0);  
lcd.print("Gas Value: ");  
}
```

```
void loop()  
{  
    sensorValue = analogRead(gas);  
    Serial.println(sensorValue);  
    if(sensorValue > 500 &&  
        !gateClosed)
```

```

{

    Serial.println("GAS    DETECTED");
    lcd.setCursor(0,1);  lcd.print("GAS
    DETECTED "); sendSMS("GAS IS
    DETECTED!!"); myservo.write(90);
    gateClosed = true; sendSMS("THE
    KNOB IS CLOSED");
    lcd.setCursor(0,1);
    lcd.print("KNOB IS CLOSED");
    delay(1000);
}

else if(sensorValue > 500 && gateClosed)
{
    Serial.println("GAS            DETECTED");
    lcd.setCursor(0,1); lcd.print("GAS DETECTED ");
    sendSMS("GAS        IS        DETECTED!!");
    sendSMS("THE KNOB IS ALREADY CLOSED");
    lcd.setCursor(0,1);    lcd.print("KNOB    IS
    CLOSED"); delay(1000);
}
else
{

```

```

byte    buttonState    =    digitalRead(LEVER);
if(buttonState == HIGH)
{
    myservo.write(0); gateClosed =
    false;  Serial.println("GATE  IS
    OPENED");
}
else
{
    myservo.write(90); gateClosed =
    true;  Serial.println("GATE  IS
    CLOSED");
}
}
}

void sendSMS(char*message)
{
    while (sgps.available() >
    0)          if
    (gps.encode(sgps.read()
    ))

    {
        if (gps.location.isValid())
        {

```

```

sgsm.listen(); sgsm.print("\r"); delay(1000);

sgsm.print("AT+CMGF=1\r"); // AT COMMAND TO SEND SMS

delay(1000);

/*Replace XXXXXXXXXX to 10 digit mobile number & ZZ
to 2 digit country code*/

sgsm.print("AT+CMGS=\"+919025681637\"\r"); // REGISTERED
NUMBER TO SEND SMS delay(1000);

//The text of the message to be sent.

sgsm.print(message);

sgsm.print("https://www.google.com/maps/?q="); //
MAPS sgsm.print(gps.location.lat(), 6); // LAT
sgsm.print(","); sgsm.print(gps.location.lng(), 6); //
LONG delay(1000); sgsm.write(0x1A); delay(1000);

}

}

}

```

Thus Sprint 2 is successfully completed.

SPRINT 3

In Sprint 3, the sensor data will send to the IBM Cloud.

Along with the sensor value, it should send the latitude and longitude to IBM Cloud and Node Red.

CODE:

```

#include <WiFi.h>
#include <PubSubClient.h>
#include <ArduinoJson.h>

```

```

WiFiClient wifiClient;

#define ORG "mz6rat"
#define DEVICE_TYPE "ESP8266"
#define DEVICE_ID "12345"
#define TOKEN "123456789"
#define speed 0.034
char server[] =
  ORG
  ".messaging.internetofthings.ibmcloud.com";
char      publishTopic[]      =      "iot-
2/evt/Data/fmt/json"; char topic[] = "iot-
2/cmd/home/fmt/String"; char authMethod[] =
"use-token-auth"; char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":"
DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();
const int trigpin=5;
const int echopin=18;
String command;
String data="";
String lat="13.356563";
String lon="80.141428";
String name="point1";
String icon="fa-fire";
long
duration;
int dist;
void
setup()
{
  Serial.begin(115200);
  pinMode(trigpin,
  OUTPUT);
  pinMode(echopin, INPUT);
  wifiConnect();
  mqttConnect();
}

```

```

    }
    void
    loop() {

        publish
        Data();
        delay(5
        00);
    if
        (!client.loop())
        {
            mqttConnect();
        }
    }
    void
    wifiConnect() {
        Serial.print("Connecting          to          ");
        Serial.print("Wifi");  WiFi.begin("Wokwi-GUEST",
        "", 6); while (WiFi.status() != WL_CONNECTED) {
            delay(500);
            Serial.print(".")
            ; }
        Serial.print("WiFi connected, IP address: ");
        Serial.println(WiFi.localIP());
    }
    void
    mqttConnect() {
        if (!client.connected()) {
            Serial.print("Reconnecting MQTT client to ");
            Serial.println(server); while
            (!client.connect(clientId, authMethod, token)) {
                Serial.print(".");
                delay(1000);
            }
            initManagedDevice();
            Serial.println();
        }
    }
}

```



```


void
initManagedDevice() {
    if (client.subscribe(topic)) {
        Serial.println(client.subscribe(topic));
        Serial.println("subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd
        FAILED"); }
}
void publishData()
{
    digitalWrite(trigpin,L
    OW);
    digitalWrite(trigpin,H
    IGH);
    delayMicroseconds(10);
    digitalWrite(trigpin,L
    OW);
    duration=pulseIn(echop
    in,HIGH);
    dist=duration*speed/2;
    dist=dist/4; dist=100-
    dist; if(dist>80){
    lat="13.356563";
    lon="80.141428";
    }else{
        lat="0.000000";
        lon="0.000000";
    }
    DynamicJsonDocument
    doc(1024); String payload;
    doc["Name"]=name;
    doc["Latitude"]=lat;
    doc["Longitude"]=lon;
    doc["Icon"]=icon;
    doc["GasPercent"]=dist;
    serializeJson(doc,
    payload);


```

```

delay(3000);
Serial.print("\n");
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*)
payload.c_str()))
{
    Serial.println("Publish OK");
} else {
    Serial.println("Publish FAILED");
}
}

```

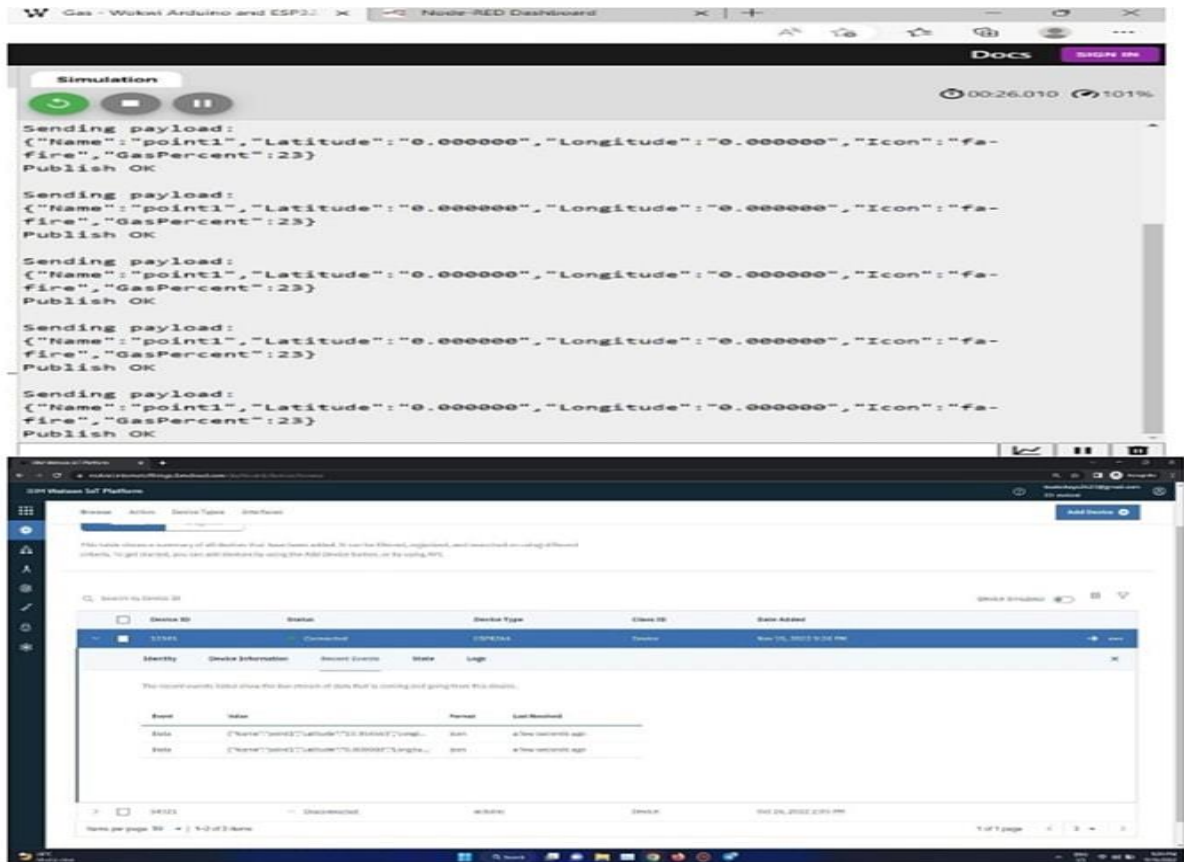

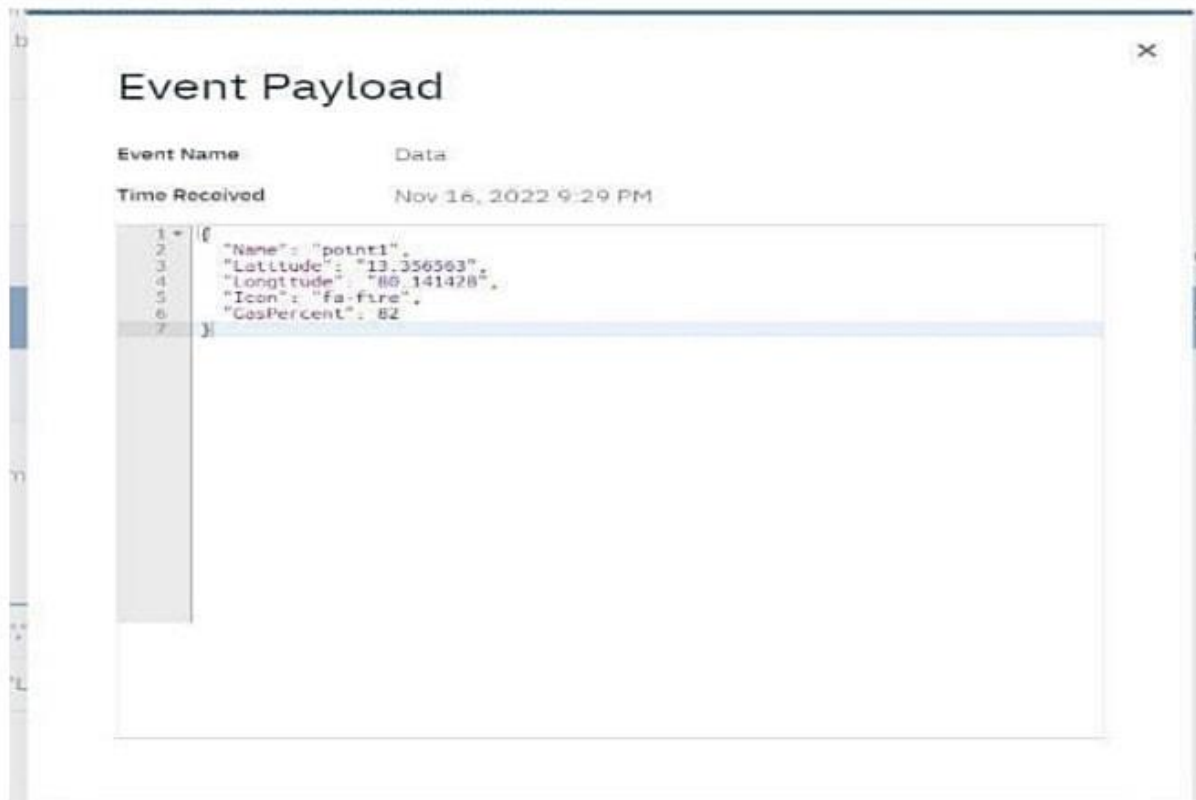

Thus Sprint 3 is successfully completed.

SPRINT 4

In Sprint 4, the gas percentage value detected by the sensor is displayed on the dashboard.

CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
#include <ArduinoJson.h>
```

```

WiFiClient wifiClient;

#define ORG "mz6rat"
#define DEVICE_TYPE "ESP8266"
#define DEVICE_ID "12345"
#define TOKEN "123456789"
#define speed 0.034
char server[] =
  ORG
  ".messaging.internetofthings.ibmcloud.com";
char      publishTopic[]      =      "iot-
2/evt/Data/fmt/json"; char topic[] = "iot-
2/cmd/home/fmt/String"; char authMethod[] =
"use-token-auth"; char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":"
DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();

const int trigpin=5;
const int echopin=18;
String command;
String data="";
String lat="13.356563";
String lon="80.141428";
String name="point1";
String icon="fa-fire";
long
duration;
int dist;
void
setup()
{
  Serial.begin(115200);
  pinMode(trigpin,
  OUTPUT);
  pinMode(echopin, INPUT);

```

```

    wifiConnect();
    mqttConnect();
}
void
loop() {

    publish
    Data();
    delay(5
    00);
if
    (!client.loop())
    {
        mqttConnect();
    }
}
void
wifiConnect() {
    Serial.print("Connecting          to          ");
    Serial.print("Wifi");  WiFi.begin("Wokwi-GUEST",
    "", 6); while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.print("WiFi connected, IP address: ");
    Serial.println(WiFi.localIP());
}
void
mqttConnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting MQTT client to ");
        Serial.println(server); while
        (!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(1000);
        }
        initManagedDevice();
        Serial.println();
    }
}


```

```


    }
}
void
initManagedDevice() {
    if (client.subscribe(topic)) {
        Serial.println(client.subscribe(topic));
        Serial.println("subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd
FAILED"); }
}
void publishData()
{
    digitalWrite(trigpin,L
OW);
    digitalWrite(trigpin,H
IGH);
    delayMicroseconds(10);
    digitalWrite(trigpin,L
OW);
    duration=pulseIn(echop
in,HIGH);
    dist=duration*speed/2;
    dist=dist/4; dist=100-
dist; if(dist>80){
    lat="13.356563";
    lon="80.141428";
    }else{
        lat="0.000000
";
        lon="0.000000
";
    }
}
DynamicJsonDocument
doc(1024); String payload;
doc["Name"]=name;
doc["Latitude"]=lat;
doc["Longitude"]=lon;

```


```
doc["Icon"]=icon;
doc["GasPercent"]=dist;
serializeJson(doc,
payload);
delay(3000);
Serial.print("\n");
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*)
payload.c_str()))
{
    Serial.println("Publish OK");
} else {
    Serial.println("Publish FAILED");
}
}
```

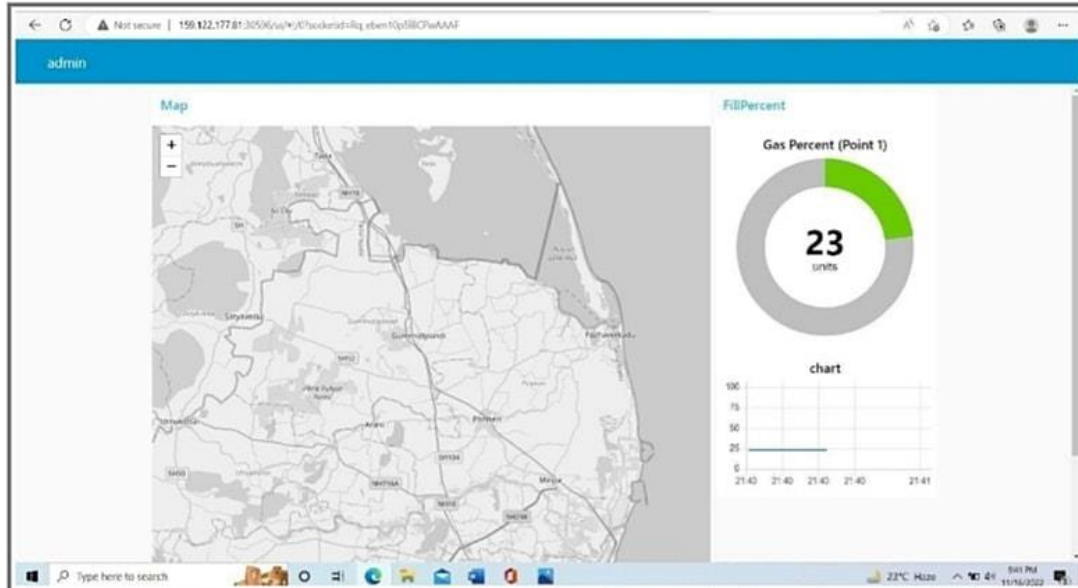

The green color indicates, the gas value is very below the threshold value, thus there is no harm.

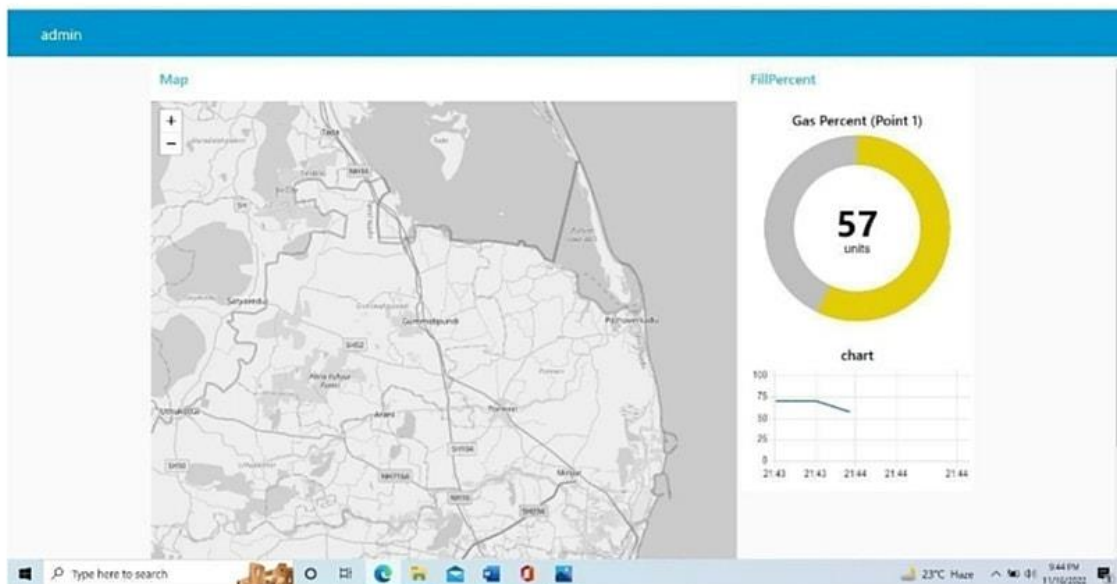

The Yellow color indicates, the gas value is on threshold.

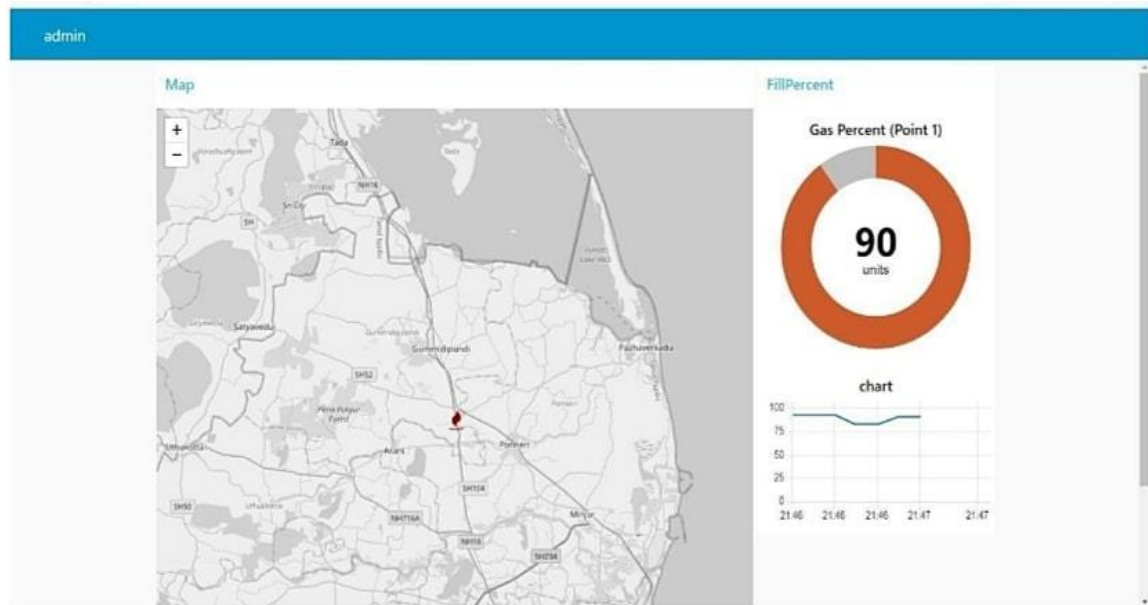

The red color denotes it crosses the threshold value, hence gas leakage is detected.

Thus Sprint 4 is successfully completed.


6.2 SPRINT DELIVERY SCHEDULING

MILESTONE



FINAL DELIVERABLE

6.3 REPORTS FROM JIRA

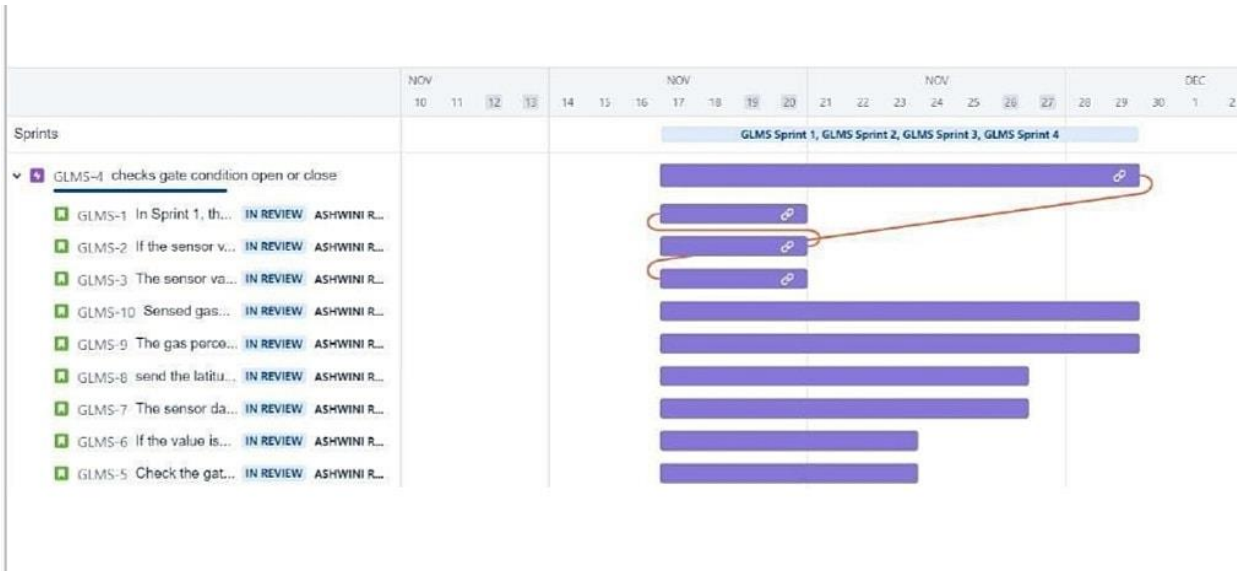


7. CODING AND SOLUTIONING

7.1 FEATURE 1

Step 1:

Find the location of the gas leakage along with gas percentage.

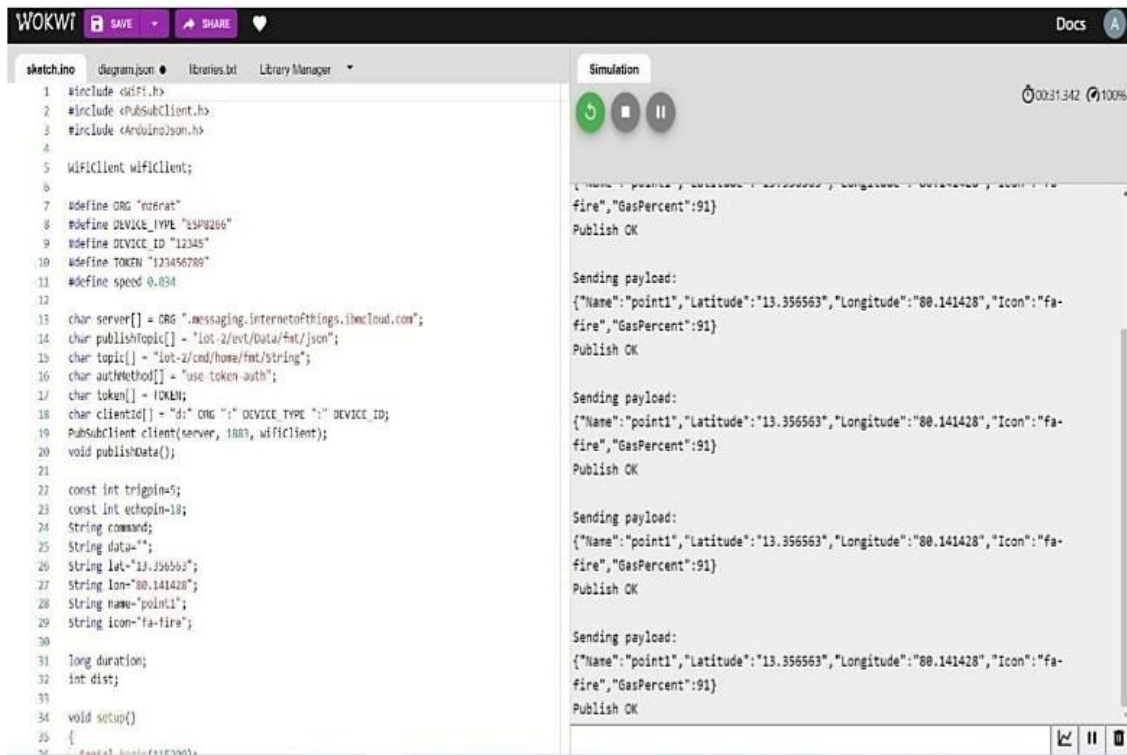

Step 2:

Output shown on the IBM IOT platform.


The screenshot displays the IBM Watson IoT Platform interface. At the top, there's a navigation bar with 'Browse', 'Action', 'Device Types', and 'Interfaces'. A sidebar on the left contains various icons for navigation. The main content area shows a table of devices. The first device, ID 12345, is selected, and its details are shown in a modal window. This modal includes tabs for 'Identity', 'Device Information', 'Recent Events', 'State', and 'Logs'. The 'Recent Events' tab is active, showing a table of events with columns for 'Event', 'Value', 'Format', and 'Last Received'. Below this, a second device, ID 54321, is partially visible in the list.

Device ID	Status	Device Type	Class ID	Date Added
12345	Connected	ESP8266	Device	Nov 15, 2022 9:24 PM
54321	Disconnected	arduino	Device	Oct 25, 2022 2:05 PM

Event	Value	Format	Last Received
data	{"Name":"point1","Latitude":"12.356561","Longi...	JSON	a few seconds ago
data	{"Name":"point1","Latitude":"0.000000","Longi...	JSON	a few seconds ago


Step 3:

In this flow we use the IBM IoT node for getting data from IBM Watson IOT platform and changing them into the required format with the help of the function node and passing the values to the Gauge node (UI node) and to the World Map node.

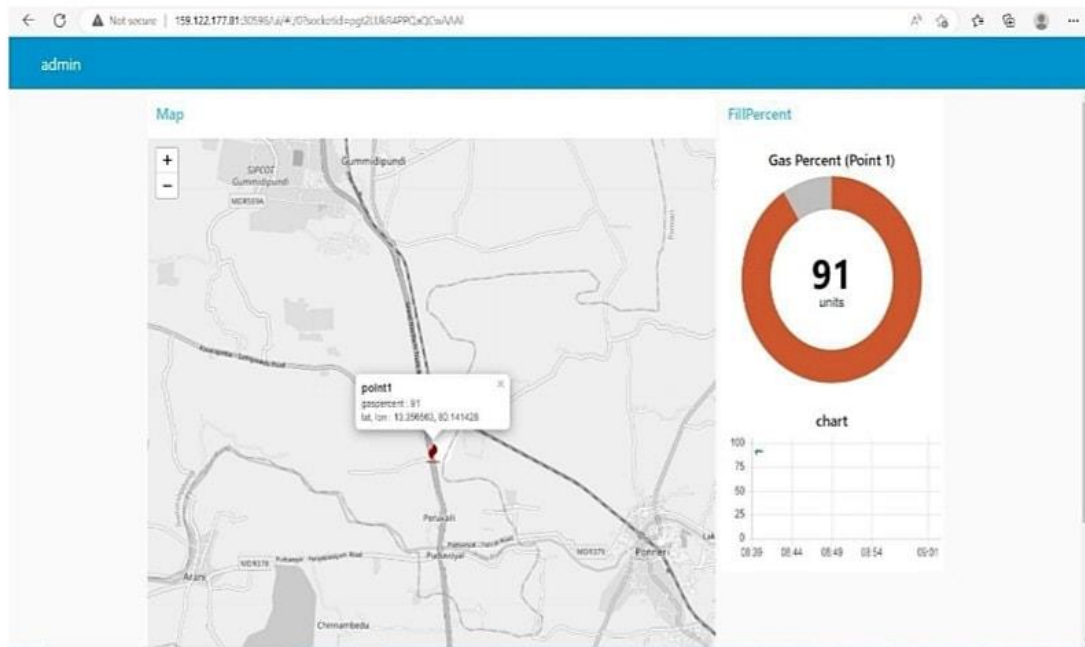

7.2 FEATURES 2

Mail come to the user along with the Alert Message. The mail also contains the location and gas percentage.

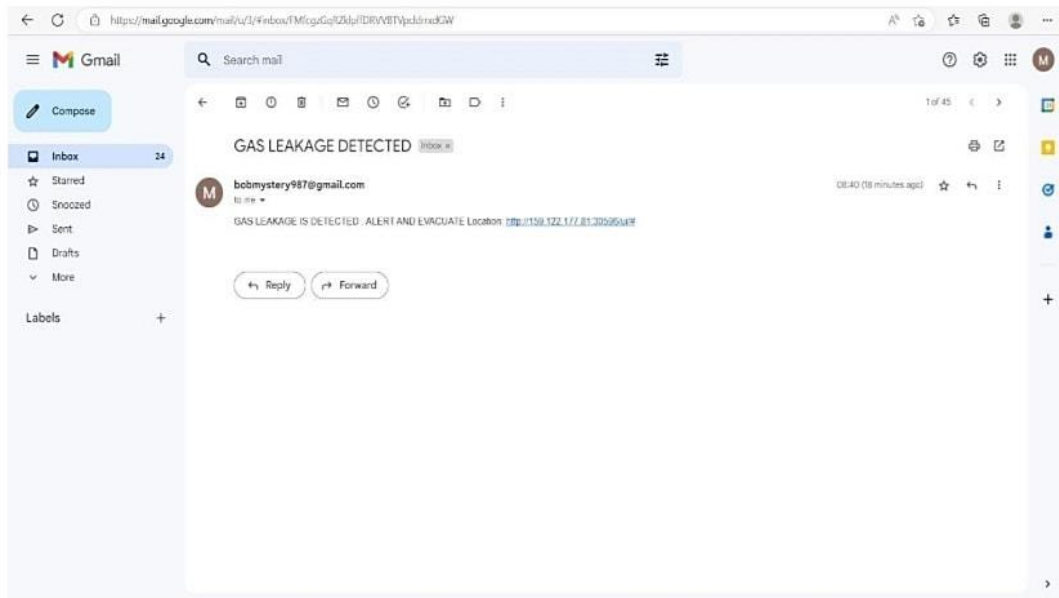

7.3 DATABASE SCHEMA



Create A Database in Cloudant :Aim:

To create a database in Cloudant to store the location of data.


Steps to be followed:

- i. Log in to IBM Cloud account.
- ii. Navigated to `./resources`.
- a. Clicked on the “Create Resource +” button.
- b. Searched for “Cloudant”.
- c. Chose the “Lite Version” and clicked on “Create”.

6.3.A The Cloudant database resources is created successfully

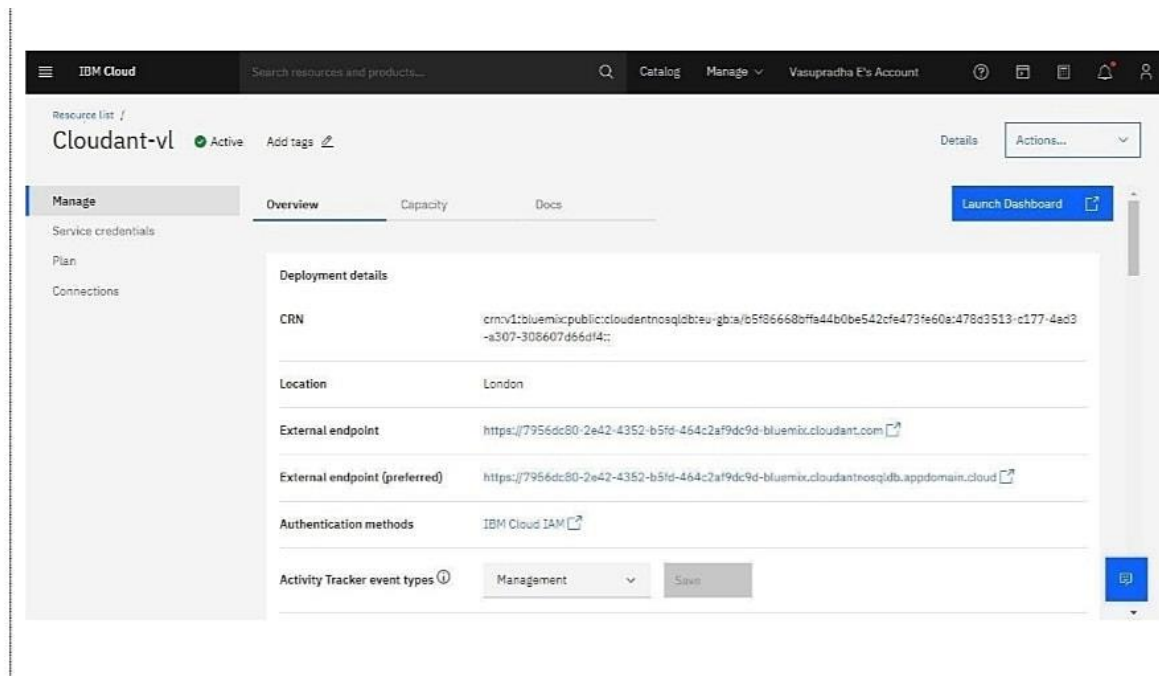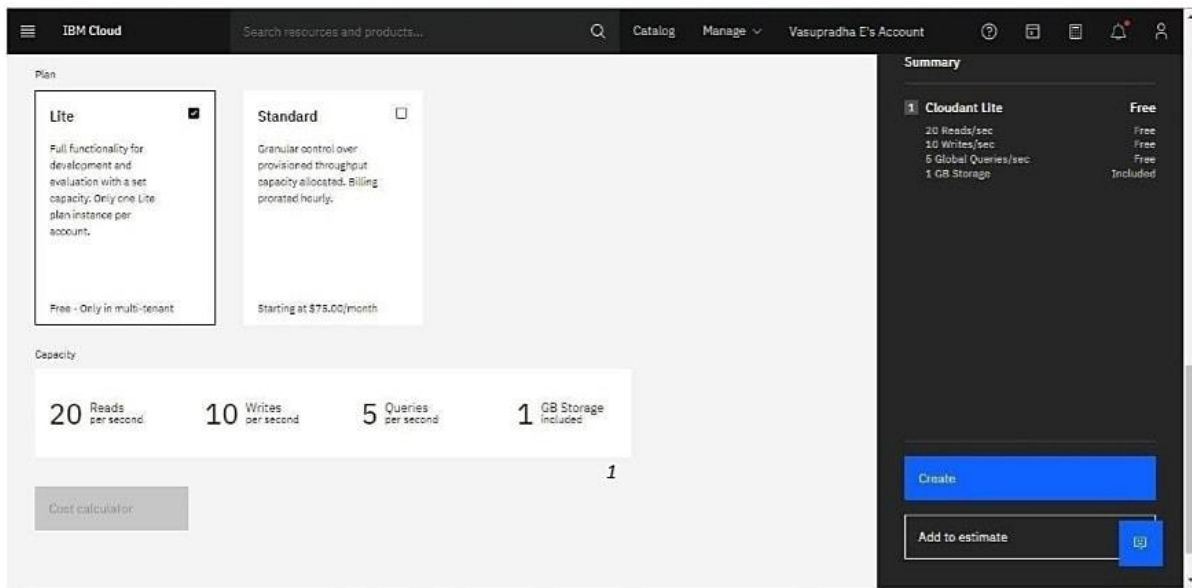

6.3.B Clicked on Launch Dashboard

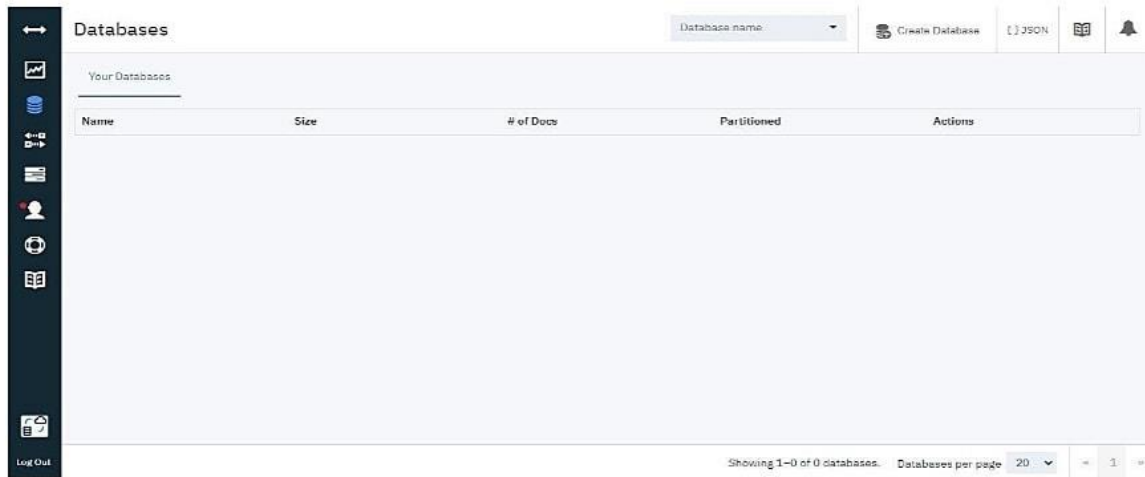

6.3.C Clicked on "Create Database". Entered "meowman" as the Database name and the "Non - partitioned " option.

6.3.D The database "meowman" was created successfully.



Result:

A database to store the location data was created successfully on Cloudant database.

8. TESTING

1. Purpose of Document

The purpose of this document is to briefly explain the test coverage and open issues of the [ProductName] project at the time of the release to User Acceptance Testing (UAT).

8.1 User Acceptance Testing

2. Defect Analysis

Section	Total Cases	Not Tested	Fail	Pass
Print Engine	7	0	0	7
Client Application	50	0	0	50
Security	2	0	0	2
Outsource Shipping	3	0	0	3

This report shows the number of resolved or closed bugs at each severity level, and how they were resolved

Resolution	Severity 1	Severity 2	Severity 3	Severity 4	Subtotal
By Design	10	4	2	3	19
Duplicate	1	0	3	0	4
External	2	3	0	1	6
Fixed	10	2	4	20	36
Not Reproduced	0	0	1	0	1
Skipped	0	0	1	1	2
Won't Fix	0	5	2	1	8
Totals	23	14	13	24	74

8.2 Test Cases

3. Test Case Analysis

This report shows the number of test cases that have passed, failed, and untested

Exception Reporting	9	0	0	9
Final Report Output	4	0	0	4
Version Control	2	0	0	2

10 . ADVANTAGES & DISADVANTAGES

10.1 ADVANTAGES

1. Our system helps customers to upgrade their safety and protect life and property from reputed accidents.
2. We can able to observe the amount of the gas and also the gas leak.
3. By this system, the users can be aware of their gas level and it also avoids the prior and delay booking of the cylinder.
4. The system is much more efficient and also the sensor used in the system MQ-6, is in constant d detection of any change in the environment. Immediate action is taken if there is an accidental leakage insuring 100% safety.
5. The proposed system helps the LPG gas customers to lead a pleasant life
6. Tiny size compared with other types of load cells.
7. Very little influence because of temperature changes.
8. Extremely precise and linear measurements

10.2DISADVANTAGES

1. Detected Any Moisture
2. Will not Find Very small Leak
3. Accuracy of Location need to be carefully verified

11. CONCLUSION

Gas leaks cause serious disasters that result in property damage and human injuries. The main causes of gas leaks are poor equipment upkeep and a lack of public awareness. As a result, detecting LPG leaks is critical for avoiding accidents and saving human lives. This paper discussed a system for detecting and alerting LPG leaks. Whenever LPG leakage is detected, this device activates an LED and a buzzer to inform people. This approach is straightforward but dependable.

Internet of Things has gained its wide popularity in recent days due to its various streams of applications which has paved way for smooth, safe and easier mode of living style for human beings. One such area of applications includes gas booking and gas leakage detection for both domestic and commercial purposes. Though, several techniques is existing for the same, yet

gas leakage detection is one major concern and a challenge

The new proposed system which is microcontroller based application of gas booking and gas detection systems using IOT. The sensor used in this model can sense and detect the leakage of the gas and the user gets notification regarding gas leakage and can also monitor the cylinder weight it can be taken to pre-book the new cylinder automatically. This proposed system can be useful in marketing sectors like hotels, shop etc. The main intention of this work is to ensure safe and easier way of gas booking and gas leakage detection to avoid disasters that may occur due to negligence.

12.FUTURE SCOPE

In the future, instead of using AC power, the gas leakage detecting system might be created using photovoltaic panels with a battery as a backup power supply to give a continuous supply, as opposed to the current use of AC power. The protection system employs a combination of MQ6 gas sensors, DHT22 temperature sensors, load sensors, smoke and flame sensors, and PIR sensors.

A number of sensors must be calculated, taking into account the room's volume, installation position, and other factors. This system assures that if a gas leak happens, it can be tracked more effectively and that occupants may be notified ahead of time, regardless of whether the leak is visible or not, whether the house is vacant or occupied. The best recommendation for a monitoring system is to utilize a WiFi module that allows the user to monitor the gas level in real-time and automate direct management of the safety device system if an unanticipated occurrence occurs. Finally, the safety device employed was

the most vital and important aspect. We also suggested that a tripper circuit be built, which would automatically turn off the (MSB) in the event of a fire, and turn off the gas regulator valve via a solenoid valve either from the cylinder from the main switchboard, If an incident occurs, it automatically can switch on the exhaust fan to suck gas to the outside house and sound an alarm and

audio buzzer to inform the user or persons around and the user can opening the window, This device monitors the gas and detects any leaks in order to keep people safe.

13 APPENDIX

SOURCE CODE:

Detect the gas Leakage

```
#include<Servo.h>

#include <TinyGPS++.h>

#include <SoftwareSerial.h>

#include<LiquidCrystal_I2C.h>

LiquidCrystal_I2C lcd(32, 16, 2);

int GPSBaud = 9600;

TinyGPSPlus gps;

SoftwareSerial sgps(13, 15); //Rx , Tx gps

SoftwareSerial sgsm(3, 1); // Rx , Tx gsm

#define KNOB 3
```



```
#define LEVER 2
```

```
Servo myservo; int
```

```
gas = A5; int
```

```
sensorValue = 0;
```

```
bool gateClosed =
```

```
true;
```

```
void setup()
```

```
{
```

```
  Serial.begin(9600);
```

```
  pinMode(LEVER, INPUT);
```

```
  myservo.attach(KNOB);
```

```
  myservo.write(90);
```

```
  sgsm.begin(9600);
```

```
  sgps.begin(9600);
```

```
  lcd.init();      lcd.clear();
```

```
  lcd.backlight();
```

```
  lcd.setCursor(3,0);
```

```
  lcd.print("GAS LEAKAGE");
```

```
  lcd.setCursor(4,1);
```

```
  lcd.print("DETECTION");
```

```
  delay(3000);    lcd.clear();
```

```
lcd.setCursor(0,0);  
lcd.print("Gas Value: ");  
}
```

```
void loop()  
{  
  sensorValue = analogRead(gas);  
  Serial.println(sensorValue); if(sensorValue >  
  500 && !gateClosed)  
  {  
    Serial.println("GAS      DETECTED");  
    lcd.setCursor(0,1);    lcd.print("GAS  
    DETECTED  ");  sendSMS("GAS  IS  
    DETECTED!!");    myservo.write(90);  
    gateClosed = true; sendSMS("THE KNOB  
    IS CLOSED");  
    lcd.setCursor(0,1); lcd.print("KNOB IS  
    CLOSED"); delay(1000);  
  }  
  else if(sensorValue > 500 && gateClosed)  
  {  
    Serial.println("GAS DETECTED"); lcd.setCursor(0,1);  
    lcd.print("GAS DETECTED  ");  sendSMS("GAS  IS  
    DETECTED!!");  sendSMS("THE KNOB IS ALREADY
```

```

    CLOSED"); lcd.setCursor(0,1); lcd.print("KNOB IS
    CLOSED");

    delay(1000);
}
else
{
    byte buttonState = digitalRead(LEVER); if(buttonState ==
    HIGH)
    {
        myservo.write(0); gateClosed = false;
        Serial.println("GATE IS OPENED");
    }
    else
    {
        myservo.write(90); gateClosed =
        true; Serial.println("GATE IS
        CLOSED");
    }
}
}

void sendSMS(char*message)
{
    while (sgps.available() > 0)
        if (gps.encode(sgps.read()))

```

```

{
  if (gps.location.isValid())
  {
    sgsm.listen(); sgsm.print("\r"); delay(1000);

    sgsm.print("AT+CMGF=1\r"); // AT COMMAND TO SEND SMS
    delay(1000);

    /*Replace XXXXXXXXXX to 10 digit mobile number & ZZ to 2
    digit country code*/

    sgsm.print("AT+CMGS=\"+919025681637\"\r"); // REGISTERED
NUMBER TO SEND SMS delay(1000);

    //The text of the message to be sent. sgsm.print(message);
    sgsm.print("https://www.google.com/maps/?q="); // MAPS
    sgsm.print(gps.location.lat(), 6); // LAT sgsm.print(",");
    sgsm.print(gps.location.lng(), 6); // LONG    delay(1000);
    sgsm.write(0x1A); delay(1000);
  }
}
}

```

For sending latitude and longitude details to IBM Watson IOT platform

```

#include <WiFi.h>
#include <PubSubClient.h>

#include <ArduinoJson.h>

WiFiClient wifiClient;

```

```
#define ORG "mz6rat"
#define DEVICE_TYPE "ESP8266"
#define DEVICE_ID "12345"
#define TOKEN "123456789" #define
speed 0.034

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String"; char
authMethod[] = "use-token-auth"; char token[] =
TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient); void
publishData();

const int trigpin=5; const
int echopin=18;
String command;
String data="";
String lat="13.356563";
String lon="80.141428";
String name="point1";
String icon="fa-fire";

long duration; int
dist;

void setup()
{
  Serial.begin(115200);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
  wifiConnect();
  mqttConnect();
```

```
}
```

```
void loop() {  
  publishData();  
  delay(500);  
  if (!client.loop()) {  
    mqttConnect();  
  }  
}
```

```
void wifiConnect() {  
  Serial.print("Connecting to "); Serial.print("Wifi");  
  WiFi.begin("Wokwi-GUEST", "", 6); while  
  (WiFi.status() != WL_CONNECTED) {  
    delay(500);  
    Serial.print(".");  
  }  
  Serial.print("WiFi connected, IP address: "); Serial.println(WiFi.localIP());  
}
```

```
void mqttConnect() {  
  if (!client.connected()) {  
    Serial.print("Reconnecting MQTT client to "); Serial.println(server);  
    while (!client.connect(clientId, authMethod, token)) {  
      Serial.print("."); delay(1000);  
    }  
    initManagedDevice();  
    Serial.println();  
  }  
}
```

```
void initManagedDevice() {  
  if (client.subscribe(topic)) {  
    Serial.println(client.subscribe(topic));  
  }
```

```

        Serial.println("subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}
void publishData()
{
    digitalWrite(trigpin,LOW);
    digitalWrite(trigpin,HIGH);
    delayMicroseconds(10);
    digitalWrite(trigpin,LOW);
    duration=pulseIn(echopin,HIGH);
    dist=duration*speed/2;
    dist=dist/4; dist=100-dist;
    if(dist>80){ lat="13.356563";
    lon="80.141428";
    }else{ lat="0.000000";
    lon="0.000000";
    }
    DynamicJsonDocument doc(1024);
    String payload;
    doc["Name"]=name;
    doc["Latitude"]=lat;
    doc["Longitude"]=lon;
    doc["Icon"]=icon;
    doc["GasPercent"]=dist;
    serializeJson(doc, payload);
    delay(3000);
    Serial.print("\n");
    Serial.print("Sending payload: "); Serial.println(payload); if
    (client.publish(publishTopic, (char*) payload.c_str())) {
        Serial.println("Publish OK");
    } else {
        Serial.println("Publish FAILED");
    }
}

```

```
}  
}
```

GITHUB AND DEMOLINK:

GITHUB:

<https://github.com/IBM-EPBL/IBM-Project-42073-1660648382>

VIDEO LINK:

<https://drive.google.com/file/d/1xs9r3lgBtw2XPcuROx-miHKphBKEx78H/view?usp=sharing>