Project Design Phase-II Technology Stack (Architecture & Stack)

| Date | 31 October 2022 | |
|---------------|-----------------------------------|--|
| Team ID | PNT2022TMID31482 | |
| Project Name | Smart Waste Management System for | |
| | Metropolitan Cities | |
| Maximum Marks | 4 Marks | |

Technical Architecture:

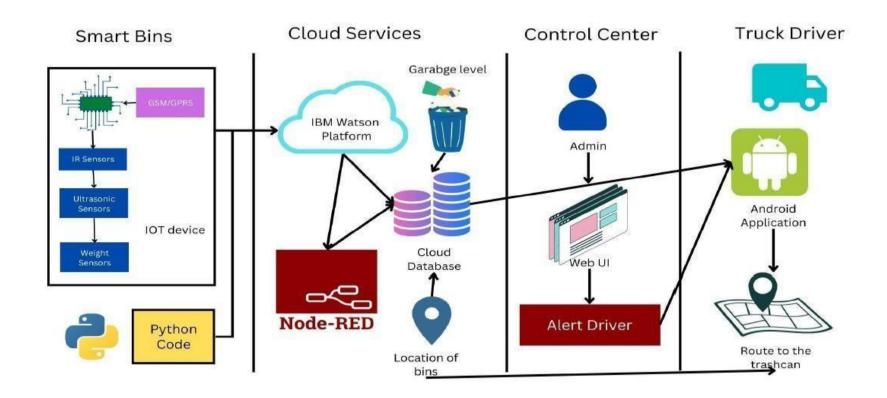


Table-1 : Components & Technologies:

| S.no | Component | Description | Technology |
|------|-------------------------|---|--|
| 1. | Application | How user interacts with application e.g. Web UI, Mobile App, Chatbot etc. | HTML, CSS, JavaScript / Angular js / React js etc. |
| 2. | Ultrasonic Sensor | An ultrasonic sensor is an instrument that measures the distance to an object using ultrasonic sound waves. | A transducer to send and receive ultrasonic pulses |
| 3. | Weight detection Sensor | Weight sensors are a device used to measure force and load. They convert weight into an electrical signal which can be processed and used within various applications. | A load cell is essentially a force transducer or force sensor. |
| 4. | GPS Sensor | GPS sensors are receivers with antennas that use a satellite-based navigation system with a network of 24 satellites in orbit around the earth to provide position, velocity, and timing information. | GPS uses the satellites in space and the GPS receiver on the ground. |
| 5. | Cloud Database | Database Service on Cloud | IBM DB2, IBM Cloud etc. |
| 6. | LED | LED, in full light-emitting diode, in electronics, a semiconductor device that emits infrared or visible light when charged with an electric current | Electroluminescence |
| 7. | Solar Panel | A solar panel is actually a collection of solar (or photovoltaic) cells, which can be used to generate electricity through photovoltaic effect. | photovoltaics (PV) and concentrating solar-thermal power (CSP). |
| 8. | Lithium Ion Battery | A lithium-ion (Li-ion) battery is an advanced battery technology that uses lithium ions as a key component of its electrochemistry. | the positive to the negative electrode |

| 9. | Wi fi Module | The ESP8266 Wi Fi Module is a self contained SOC with integrated TCP/IP protocol stack that can give any microcontroller access to your Wi Fi network. | IEEE 802 protocol |
|-----|---------------------------------|--|--|
| 10. | Infrastructure (Server / Cloud) | Application Deployment on Local System / Cloud Local Server Configuration: Cloud Server Configuration: | Local, Cloud Foundry, Kubernetes, etc. |

Table-2: Application Characteristics:

| S.no | Characteristics | Description | Technology |
|------|--------------------------|---|--------------------------|
| 1. | Open-Source Frameworks | Template for software development that is designed by a social network of software developers. These frameworks are free for public use | Python, Embedded C. |
| 2. | Security Implementations | provides the technical security policies, requirements, and implementation details for eliminating the security weaknesses | GSM/GPRS. |
| 3. | Scalable Architecture | scalable architecture supports higher workloads without any fundamental changes to it. | Node Red. |
| 4. | Availability | The quality or state of being available trying to improve the availability of affordable housing. | Cloud, DB. |
| 5. | Performance | The execution of an action | IBM Watson IoT Platform. |