

IBM – NALAIYATHIRAN PROJECT
IOT BASED SAFETY GADGET FOR CHILD
SAFETY AND MONITORING

INDUSTRY MENTOR : BARADWAJ 2

MENTOR : GAYATHRI.S

TEAM ID : PNT2022TMID37439

TEAM LEAD : BHUVANESHWARI.V.B

TEAM MEMBER : NAFISA MAHIRA.K.M

TEAM MEMBER : SHALINI.S

TEAM MEMBER : HAMEED JAHUFAR
HAJA ALAUDIN.N.H

TABLE OF THE CONTENT

CHAPTER	CONTENTS	PAGE NO
1	INTRODUCTION	
	1.1 PROJECT OVERVIEW	4
	1.2 PURPOSE	
2	LITERATURE SURVEY	
	2.1 EXISTING PROBLEM	5
	2.2 REFERANCES	
	2.3 PROBLEM STATEMENT DEFINITION	
3	IDEATION AND PROPOSED SOLUTION	
	3.1 EMPATHY MAP CANVAS	
	3.2 IDEATION AND BRAINSTORMING	8
	3.3 PROPOSED SOLUTION	
	3.4 PROBLEM SOLUTION FIT	
4	REQUIREMENT ANALYSIS	
	4.1 FUNCTIONAL REQUIREMENT	11
	4.2 NON-FUNCTIONAL REQUIREMENT	
5	PROJECT DESIGN	
	5.1 DATA FLOW DIAGRAM	12
	5.2 SOLUTION AND TECHNICAL ARCHITECTURE	
	5.3 USER STORIES	

6	PROJECT PLANNING AND SCHEDULING	
	6.1 SPRINT PLANNING AND ESTIMATION	
	6.2 SPRINT DELIVERY SCHEDULE	14
	6.3 REPORTS FROM JIRA	
7	CODING & SOLUTIONING(Explain the features added in the project along with the code)	
	7.1 FEATURE 1	15
	7.2 FEATURE 2	
	7.3 DATABASE SCHEMA(if applicable)	
8	TESTING	
	8.1 TEST CASES	19
	8.2 USER ACCEPTANCE TESTING	
9	RESULTS	
	9.1 PERFORMANCE METRICS	22
10	ADVANTAGES & DISADVANTAGES	26
11	CONCLUSION	27
12	FUTURE SCOPE	28
13	APPENDIX	
	13.1 SOURCE CODE	29
	13.2 GITHUB & PROJECT DEMO LINK	

1. INTRODUCTION

1.1 PROJECT OVERVIEW

Creating a device that can be followed using GPS locations and has a panic button to inform the parent via a GSM module, this invention is primarily focused on improving child safety. An Android app for parents is created to control and monitor the device at any time. Smart gadget devices are always connected to parents' phones, which can receive and make phone calls as well as SMS gadget via a GSM module. Additionally, wireless technology is implemented on the device, which is useful to bind the device within a region of monitoring range; if the device is moving out of monitoring range, an alert will be triggered on a binding gadget, helping you maintain a virtual watch over the child. An alert will be sent to a bound device if the device moves outside of the monitoring range, allowing you to keep a virtual check on the child. Devices come with a health monitoring system that checks for factors including heart rate, pulse, and temperature. The parental app allows for the monitoring of these indicators. Using a contact switch, the device also keeps track of whether or not it is plugged in and notifies the parent the moment it is unplugged.

1.2 PURPOSE

Approximately 80% of all reports of child abuse are made nowadays, with 74% of the victims being girls and the remaining 20% being males. In this world, a child goes missing every forty seconds. Children are the foundation of a country; if their future was threatened, it would have an effect on the development of the whole country.

The emotional and mental stability of the children is compromised as a result of the abuse, ruining their futures and careers. The things that happen to these defenseless kids are not their fault. Therefore, parents are in charge of raising their own children. However, parents are compelled to seek money because of the state of the economy and their desire to concentrate on their child's future and job.

Consequently, it becomes challenging for them to constantly cling to their kids. We have created a setting in our system where this issue can be effectively solved. It enables parents to keep a close eye on their kids in real time while concentrating on their own careers without having to take any physical action. In essence, kids cannot tell their parents about the abuse they experience on a regular basis. They are too young to really comprehend what truly occurs to them. Parents find it challenging to recognize when their children are being abused. So, the main objective of this module is to help working parents to be free from worry about their children by tracking their movements at any time. An autonomous real-time monitoring system is required for every child worldwide in order to stop attacks on children.

2. Literature Survey

Employing an efficient Child Tracking System using the Internet of Things

The main concept of this paper talks about the idea of Child Tracking (CT) System for the safety of kids. Our purpose in this work is to track and secure the child at any place, over a command via SMS to communicate between device and parent with the help of GSM module wired to Arduino Mega Board. The proposed system provides the real-time location, child body temperature, environment temperature, humidity of the environment and alarm to the parents so that they can rescue their child from strangers. The proposed CT system combines technologies and sensors to easily monitor the child and get the information. This paper provides the comfort of taking care over the children remotely at an instance of time.

Design and development of an IOT based wearable device for the safety and security of women and girl children

The aim of this work is to develop a wearable device for the safety and protection of women and girls. This objective is achieved by the analysis of physiological signals in conjunction with body position. The physiological signals that are analysed are galvanic skin resistance and body temperature. Body position is determined by acquiring raw accelerometer data from a triple axis accelerometer.

Acquisition of raw data is then followed by activity recognition which is a process of employing a specialized machine learning algorithm. Real-time monitoring of data is achieved by wirelessly sending sensor data to an open-source Cloud Platform. Analysis of the data is done on MATLAB simultaneously. This device is programmed to continuously monitor the subject's parameters and take action when any dangerous situation presents itself. It does so by detecting the change in the monitored signals, following which appropriate action is taken by means of sending notifications/alerts to designated individuals.

Smart Intelligent System for Women and Child Security

This paper surveys about the security system for women and children which allows immediate responses in any harassment in public places, societies etc. Women all over the world are facing unethical physical harassment and Children cannot be left unattended at a social event or outside the home. Our project solves both the problems. A portable device which will have a pressure switch. As soon as an assailant is about to attack the women/child or when they sense any insecurity from a stranger, he/she can then put pressure on the device by squeezing or compressing it. Instantly the pressure sensor senses this pressure and a conventional SMS, with the victim's location will be sent to their parents/guardian cell phone numbers stored in the device while purchasing it, followed by a call. If the call is unanswered for a prolonged time, a call will be redirected to the police and the same message will be sent. The main feature of our system is less response time will be required for helping the victim.

RFID-based System for School Children Transportation Safety Enhancement

This paper presents a system to monitor pick-up/drop-off of school children to enhance the safety of children during daily transportation from and to school. The system consists of two main units, a bus unit, and a school unit. The bus unit the system is used to detect when a child boards or leaves the bus. This information is communicated to the school unit that identifies which of the children did not board or leave the bus and issues an alert message accordingly. The system has a developed web-based database-driven application that facilitates its management and provides useful information about the children to authorized personnel. A complete

prototype of the proposed system was implemented and tested to validate the system functionality. The results show that the system is promising for daily transportation safety.

2.1 EXISTING SYSTEM

Mobile wearable device communication creates new challenges and also covers the short-range. It gives peer-to-peer communication or client-server fashion communication with smartphones, tablets, and gateway nodes. Women safety devices give protection and women themselves want to intimate their dangerous situation by pressing the buzzer in the device. In this, a person with a particular application will receive a woman's current status in a danger situation. The system provides an alert message for the small range and it can be received only through mobile phones. The existing system uses a Wi-Fi module to intimate the parents about their child's condition. Parents can get the personal details of children by giving keywords like Body temperature, location to the concern device.


2.2 REFERENCE

- [1] Kumar A, Shankar KM. "Employing an efficient Child Tracking System using the Internet of Things". 30Jun.2022 ;14(02):139-42. DOI: 10.18090/samriddhi.v14i02.2
- [2] A. Jatti, M. Kannan, R. M. Alisha, P. Vijayalakshmi and S. Sinha, "Design and development of an IOT based wearable device for the safety and security of women and girl children," 2016 IEEE International Conference on Recent Trends in Electronics, Information & Communication Technology (RTEICT), 2016, pp. 1108-1112, doi: 10.1109/RTEICT.2016.7808003.
- [3] S. K. Punjabi, S. Chaure, U. Ravale and D. Reddy, "Smart Intelligent System for Women and Child Security," 2018 IEEE 9th Annual Information Technology, Electronics and Mobile Communication Conference (IEMCON), 2018, pp. 451-454, doi: 10.1109/IEMCON.2018.8614929.
- [4] RFID-based System for School Children Transportation Safety

Enhancement ", Proceedings of the 8th IEEE GCC Conference and Exhibition, Muscat, Oman, 1-4 February 2015.

3 IDEATION & PROPOSED SOLUTION

3.1 Empathy Map Canvas

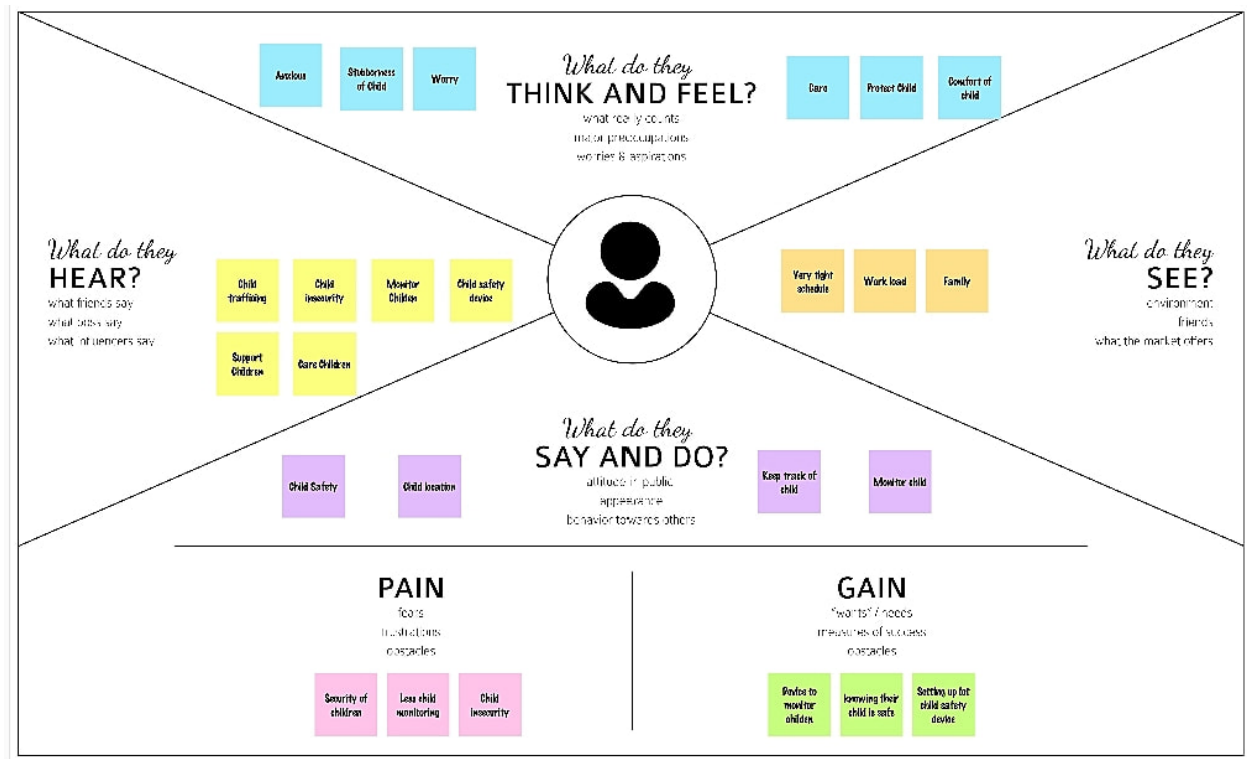

3.2 Ideation and Brainstorming

Idea 1:

A compact wearable gadget with a pressure switch. The user can apply pressure to the device by squeezing or compressing it as soon as an attacker is preparing to attack the person or as soon as the person perceives any insecurity from a stranger. Instantaneously the pressure sensor detects this pressure, and a call is placed to the victim's parents' or guardian's mobile phone numbers that were put in the device at purchase, along with a regular SMS that includes the victim's location. The identical message will be delivered to the police if the call goes unanswered for an extended period of time. Further, a message with the person's current location is sent to the parent or guardian's phone by

standard SMS if the person enters an area that is typically offlimits to them.

Idea 2:

By creating a device that can be followed using GPS locations and has a panic button to inform the parent via a GSM module, this invention is primarily focused on improving child safety. An Android app for parents is created to control and monitor the device at any time. Smart gadget device is always connected to parents' phone, which can receive and make phone calls as well as SMS on gadget via GSM module. Additionally, wireless technology is implemented on the device, which is useful to bind the device within a region of monitoring range; if the device is moving out of monitoring range, an alert will be triggered on a binding gadget, helping you maintain a virtual watch over the child. An alert will be sent to a bound device if the device moves outside of the monitoring range, allowing you to keep a virtual check on the child. Devices come with a health monitoring system that checks for factors including heart rate, pulse, and temperature. The parental app allows for the monitoring of these indicators. Using a contact switch, the device also keeps track of whether or not it is plugged in and notifies the parent the moment it is unplugged.

Idea 3:

According to the latest surveys, the number of cases of child abduction and missing children in India is steadily rising. One of the primary worries for parents today is the safety of their children on school buses and outside of school premises, The suggested system makes an effort to give kids security features using new techniques that are introduced to the current safety system for better defense. A portable unit, a cloud platform, and an Android application make up the proposed system. A raspberry pi 2 model B, a GPS receiver with antenna, and a pulse rate sensor make up the portable device. Using a GPS receiver and a heartbeat sensor, this device will track the child's location in terms of latitude, longitude, and altitude. These data are transmitted

to a raspberry pi module, which uses internet connectivity to inject them into elastic search. The android program has a user interface that displays the child's location on a map, path they took, and their rate of movement. The child's heart rate is also continuously tracked by the application.

3.4 Problem solution fit

Define CS, fit into CC Focus on J&P, map into BE, understand RC	1. CUSTOMER SEGMENT(S) CS Our Customers are mainly parents who are working and do not have enough time to take care of their children. Such parents are not provided with availability at anytime to look after their children. If the case so they are in need of something to make their children under the surveillance of them.	6. CUSTOMER CONSTRAINTS CC The constraints our customers facing are such connectivity issues or may be the protocols being used for communication. There may be chances of issues arise due to technical deficiencies. Giving a second thought, price to be afforded for buying the developed solution kit might be the one they could not afford.	5. AVAILABLE SOLUTIONS AS Of course the solutions are available readily in the market such as angel monitoring system, Child GPS Tracking System, Child Safety GSM Kit, etc ... One such constraint the customers facing are cost and inefficiencies in the working once purchased.	Explore AS, different from CS Focus on J&P, map into BE, understand RC
	2. JOBS-TO-BE-DONE / PROBLEMS JP To enhance the operating condition of the developed solution the way it is not supposed to deal with any fault at any point of time so that the child safety can be highly ensured. To ensure the parents that their surveillance on their children can never be taken off.	9. PROBLEM ROOT CAUSE RC Considering the origination of the problem, it occurs in the base of merely irrespective persons that are no way relatable to the children but for the currency kind of thing and also the child abuse(mainly in case of girl children)	7. BEHAVIOUR BE The proposed solution always keeps/tends to make the gadget work in an efficient way so that it is not supposed meet up with any further constraints. Also the solution tries to ensure that efficient functionalities are to be provided to the fullest to the customers	
3. TRIGGERS TR The trigger which induces the customers is the one that when other working parents give a try to this and comment a positive review on this, they also want to buy a kit to ensure their child safety.				
10. YOUR SOLUTION SL Our Team has highly been intending to develop an efficient solution to overcome all the flaws that the existing solutions hold back still. We are highly on demand to ensure the efficient functionalities of the developing module the way it will not fail at anytime.		8. CHANNELS of BEHAVIOUR CH Our proposed solution has the modes of working in both offline and Online. In case of any disconnectivities happen the gadget which has been developed might tend to work on a plan B which includes the backup of the failure of actual working kit.		

4 Requirement analysis

4.1 Functional requirements


FR No.	Functional Requirement (Epic)	Sub Requirement (Story / Sub-Task)
FR-1	User Registration	Registration through Form Registration through Gmail
FR-2	User Confirmation	Confirmation via Email Confirmation via OTP
FR-3	Notification	Notified via Mobile App
FR-4	User Interface	Mobile App- MIT App Inventor Able to see location of children when they are out of geofence

4.2 Non-Functional requirements:

FR No.	Non-Functional Requirement	Description
NFR-1	Usability	Accessed through Mobile App Showing location (latitude and longitude) of child
NFR-2	Security	Database security must meet HIPAA requirements
NFR-3	Reliability and Availability	Once logged in ,webpage is available until logging out of the app
NFR-4	Performance	Each page must load within 2 seconds
NFR-6	Scalability	The process must finish within 3 hours so data is available by 8 a.m. local time after an overnight update

5 PROJECT DESIGN

5.1 Data Flow Diagrams

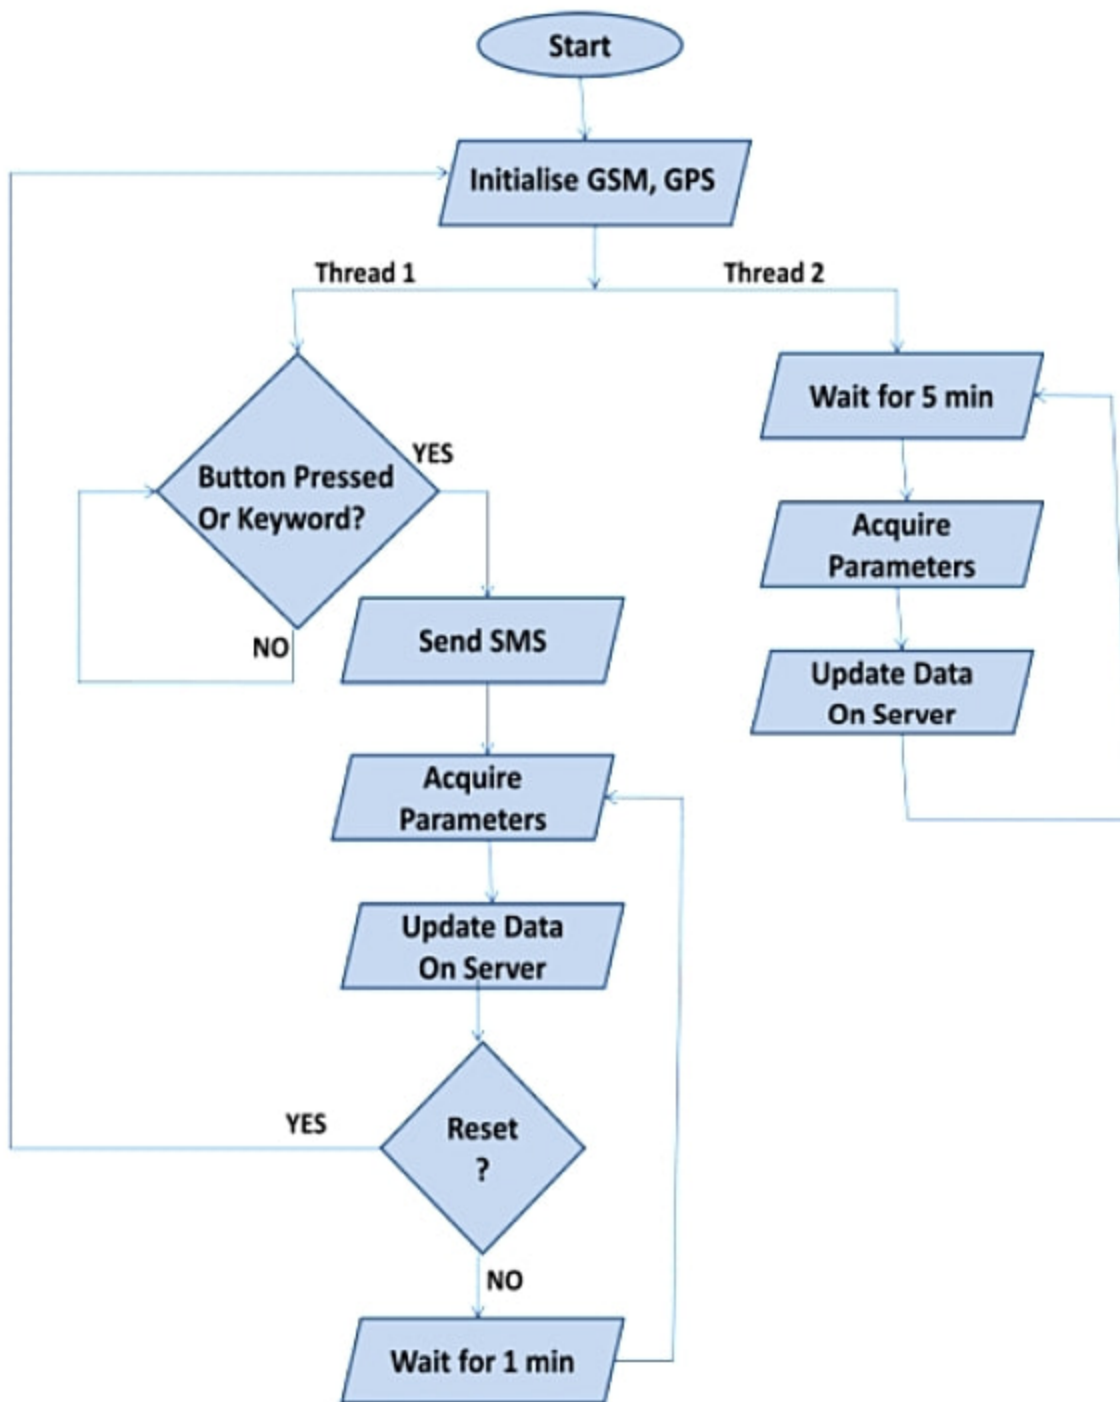

5.2 Solution & Technical Architecture


Solution Architecture

Solution architecture is a complex process – with many sub-processes –

That bridges the gap between business problems and technology solutions. Its goals Are to:

- Find the fastest tech solution to solve existing business problems.
- Describe the structure, characteristics, behavior, and other aspects of the Software to project stakeholders.
- Define features, development phases, and solution requirements.
- Provide specifications according to which the solution is defined, managed, and Delivered.

Technical Architecture

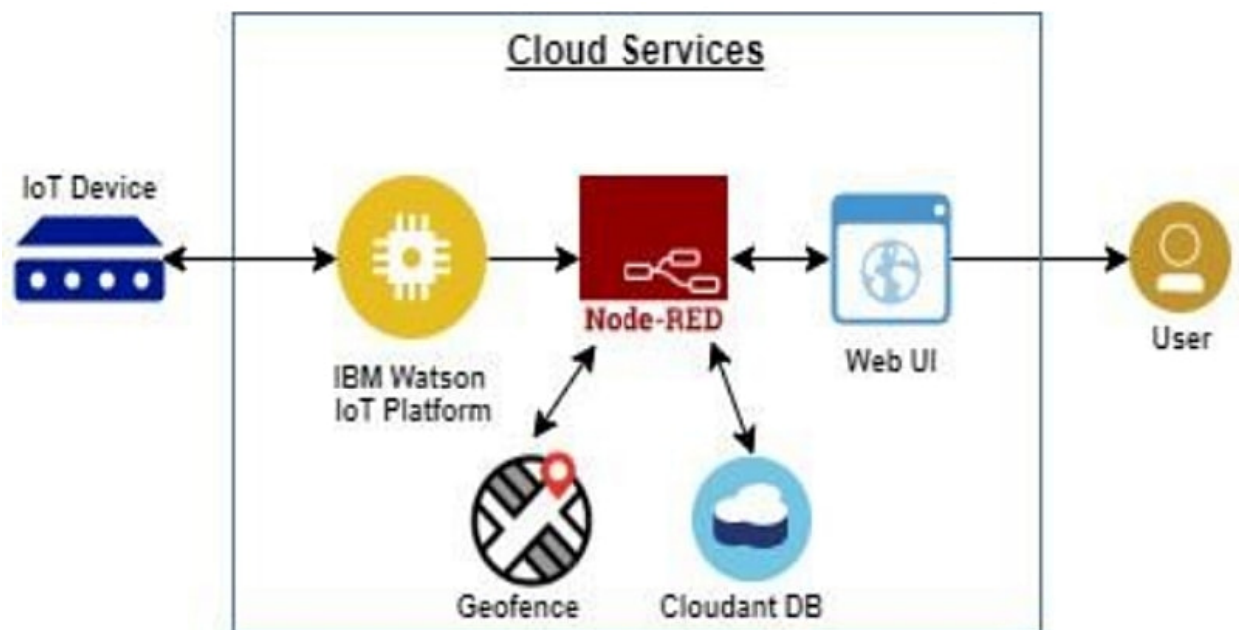

5.3 User Stories

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release
Customer(Parents Mobile user)	Registration	USN-1 (FATHER)	I can access the location of my children using the credentials provided as a Father.	I can access my account / dashboard and receive confirmation email & click confirm	High	Sprint-1
		USN-2 (MOTHER)	I can access the location of my children using the credentials provided as a Mother.	I can access my account / dashboard and receive confirmation email & click confirm	High	Sprint-1
		USN-3 (GUARDIAN)	I too can monitor the children's activities using safety gadget monitoring system.	I can access my account / dashboard and receive confirmation email & click confirm	Medium	Sprint-2
	Login	USN-4 (if required)	Same function to be performed as in previous cases.	Same function to be performed as in previous cases.	Not Yet Determined	----
	Dashboard	USN-5 (if required)	Same function to be performed as in previous cases.	Same function to be performed as in previous cases.	Not Yet Determined	----

6 PROJECT PLANNING & SCHEDULING

6.1 Sprint Planning and estimation

Sprint	Functional Requirement (Epic)	User Story Number	User Story / Task	Story Points	Priority	Team Members
Sprint-1	Registration	USN-1	As a Parent/Guardian,I can register for the application by entering my email, password, and confirming my password.	2	High	Bhuvaneshwari.V.B
Sprint-1		USN-2	As a Parent/ Guardian, I can register for the application through Gmail	1	Medium	Hameed Jahufar Haja Alaudin.N.H
Sprint-1	User Confirmation	USN-3	As a parent I will receive connection , location in sms / mail once I have entered this application	1	High	Nafisa Mahira.K.M

Sprint-1	Login	USN-4	As a parent/ guardian , I can log into the application by entering mail and password.	2	High	Shalini.S
----------	-------	-------	---	---	------	-----------

6.2 Sprint delivery schedule

Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed (as on Planned End Date)	Sprint Release Date (Actual)
Sprint-1	20	4 Days	24 Oct 2022	27 Oct 2022	20	29 Oct 2022
Sprint-2	20	5 Days	28 Oct 2022	01 Nov 2022	20	04 Nov 2022
Sprint-3	20	8 Days	02 Nov 2022	09 Nov 2022	20	11 Nov 2022
Sprint-4	20	9 Days	10 Nov 2022	18 Nov 2022	20	19 Nov 2022

7. CODING & SOLUTIONING (Explain the features Added in the project along with code)

7.1 Feature 1 :(Adding Geofence)

- Geofence is like a round wall covering the given location. So parents can use Them to mark the location where their children are going .
- Multiple Geofence can be added.

CODING:

Package

```
com.example.geofence; import
android.app.PendingIntent; import
android.content.Context; import
android.content.ContextWrapper;
import android.content.Intent;
import android.widget.Toast;
import
```

```

com.google.android.gms.common.api.ApiException;
import com.google.android.gms.location.Geofence;
import
com.google.android.gms.location.GeofenceStatusCodes;

import
com.google.android.gms.location.GeofencingRequest;
import com.google.android.gms.maps.model.LatLng;
public class GeofenceHelper extends ContextWrapper {
private static final String TAG = "GeofenceHelper";
pendingIntent pendingIntent;
public GeofenceHelper(Context base) {
    super(base);
}

public GeofencingRequest getGeofencingRequest(Geofence geofence) { return
new GeofencingRequest.Builder() .addGeofence(geofence)
.setInitialTrigger(GeofencingRequest.INITIAL_TRIGGER_ENTER) .build();
} public Geofence getGeofence(String ID, LatLng latLng, float radius, int
transitionTypes) { return new Geofence.Builder()
.setCircularRegion(latLng.latitude, latLng.longitude, radius)
.setRequestId(ID) .setTransitionTypes(transitionTypes)
.setLoiteringDelay(5000) .setExpirationDuration(Geofence.NEVER_EXPIRE)
.build(); } public PendingIntent getPendingIntent() { if (pendingIntent != null)
{ return pendingIntent; } Intent intent = new
Intent(this,GeofenceBroadcastReceiver.class); pendingIntent =
PendingIntent.getBroadcast(this, 2607,
intent,PendingIntent.FLAG_IMMUTABLE); return pendingIntent; } public
String getErrorString(Exception e) { if (e instanceof ApiException) {

```



```

ApiException apiException = (ApiException) e; switch
(apiException.getStatusCode()) { case GeofenceStatusCodes
.GEOFENCE_NOT_AVAILABLE: return
"GEOFENCE_NOT_AVAILABLE"; case GeofenceStatusCodes
.GEOFENCE_TOO_MANY_GEOFENCES: return
"GEOFENCE_TOO_MANY_GEOFENCES"; case GeofenceStatusCodes
.GEOFENCE_TOO_MANY_PENDING_INTENTS: return
"GEOFENCE_TOO_MANY_PENDING_INTENTS"; } } return
e.getLocalizedMessage();

```

7.2 Feature 2 (Alert Notification)

- Once geofence is added , when the child enters the geofence a notification will be sent.
- When the child leaves the geofence a notification will be sent .

```

package com.example.geofence; import android.content.BroadcastReceiver;
import android.content.Context; import android.content.Intent; import
android.location.Location; import android.os.CountDownTimer; import
android.util.Log; import android.widget.Toast; import
com.google.android.gms.location.Geofence; import
com.google.android.gms.location.GeofencingEvent import java.util.List;
import android.os.Handler; public class GeofenceBroadcastReceiver extends
BroadcastReceiver { private static final String TAG =
"GeofenceBroadcastReceiv"; @Override public void onReceive(Context
context, Intent intent) { // TODO: This method is called when the
BroadcastReceiver is receiving // an Intent broadcast//.
/*Toast.makeText(context, "GEOFENCE_ENTERED",
Toast.LENGTH_SHORT).show(); final Toast mToastToShow;
int toastDurationInMilliseconds = 1200000; mToastToShow =
Toast.makeText(context, "GEOFENCE_EXITED", Toast.LENGTH_LONG);
// Set the countdown to display the toast CountdownTimer toastCountDown;
toastCountDown = new CountdownTimer(toastDurationInMilliseconds,
100000) { public void onTick(long millisUntilFinished) {

```

```

mToastToShow.show(); } public void onFinish() { mToastToShow.cancel(); } };
// Show the toast and starts the countdown mToastToShow.show();
toastCountDown.start();*/ NotificationHelper notificationHelper =
new NotificationHelper(context);
notificationHelper.sendHighPriorityNotification("GEOFENCE_TRANSITIO
N_ENTER", "", MapsActivity.class); GeofencingEvent geofencingEvent =
GeofencingEvent.fromIntent(intent); if (geofencingEvent.hasError())
Log.d(TAG, "onReceive: Error receiving geofence event..."); return; } List
geofenceList = geofencingEvent.getTriggeringGeofences (); for (Geofence
geofence: geofenceList) { Log.d(TAG, "onReceive: " +
geofence.getRequestId()); } // Location location =
geofencingEvent.getTriggeringLocation(); int transitionType =
geofencingEvent.getGeofenceTransition(); switch (transitionType) {

case Geofence.GEOFENCE_TRANSITION_ENTER:
notificationHelper.sendHighPriorityNotification("Entered the Location", "",
MapsActivity.class); break; case
Geofence.GEOFENCE_TRANSITION_EXIT:
notificationHelper.sendHighPriorityNotification("Exited the Location ", "",
MapsActivity.class); break;

}

}

}

```

8. TESTING

8.1 Test Cases

Test case ID	Feature Type	Component	Test Scenario	Pre-Requisite	Steps To Execute	Test Data	Expected Result	Actual Result	Status	Comments	TC for Automation(Y/N)	BUG ID	Executed By
LoginPage_TC_01	Functional	Home Page	Verify user is able to see the Login/Signup popup when user clicked on App		1.Enter App 2.Verify login/signup popup displayed or not		Login/signup popup should display	Working as expected	Pass		Y		Shakshi, Sneha
LoginPage_TC_02	UI	Home Page	Verify the UI elements in Login/signup popup		1.Enter App 2.Verify login/signup popup with below UI elements: a) email text box b) password text box c) login button d) New customer? Register		Application should show below UI elements: a) email text box b) password text box c) login button with orange colour d) New customer? Register	Working as expected	Pass		Y		Shamegipriya, Sneha
LoginPage_TC_03	Functional	Home page	Verify user is able to log into application with Valid credentials		1.Enter App 2. Enter Valid username/email in Email text box 3. Enter valid password in password text box 4. Click on login button	Username: shobh@gmail.com password: Testing023	User should navigate to user account homepage	Working as expected	Pass		Y		Shakshi
LoginPage_TC_04	Functional	Login page	Verify user is able to log into application with Invalid credentials		1.Enter App 2. Enter Invalid username/email in Email text box 3. Enter valid password in password text box 4. Click on login button	Username: shob@gmail.com password: Testing023	Application should show "Login error. There is no user record corresponding to the identifier"	Working as expected	Pass		Y		Shakshi, Shamegipriya
LoginPage_TC_04	Functional	Login page	Verify user is able to log into application with Valid credentials		1.Enter App 2. Enter Valid username/email in Email text box 3. Enter invalid password in password text box 4. Click on login button	Username: shobh020@vinayapudva.in password: Testing02670505706075076	Application should show "the Password is invalid"	Working as expected	Pass		Y		Shreya D, Shakshi
LoginPage_TC_05	Functional	Login page	Verify user is able to log into application with Invalid credentials		1.Enter App 2. Enter Invalid username/email in Email text box 3. Enter invalid password in password text box 4. Click on login button	Username: shobh password: Testing02670505706075076	Application should show "Login error. There is no user record corresponding to the identifier"	Working as expected	Pass		Y		Sneha
Dashboard	Functional	Dashboard	Adding geo-fence in the location area		1.Enter App 2. Enter the valid username and password		Application show a red circle around the location	Working as expected	Pass		Y		Shakshi
Alert Notifications	Functional	Notification	Notification when the user entered the geo-fence		1.Enter App 2. Enter the valid username and password 3.Add the Geo-fence		Application send the notification "Entered the location"	Working as expected	Pass		Y		Shamegipriya, Sneha
Alert Notifications	Functional	Notification	Notification when the user exited the geo-fence		1.Enter App 2. Enter the valid username and password		Application send the notification "Exited the location"	Working as expected	Pass		Y		Shakshi, Sneha

8.2 User Acceptance Testing

1 .Defect Analysis

Resolu on	Severity 1	Severit y2	Severit y3	Severit y4	Subtotal
By Design	11	4	2	2	19
Duplicate	1	1	2	0	4
External	2	3	0	1	6
Fixed	10	2	3	20	35
Not Reproduc ed	0	0	2	0	2
Skipped	0	0	2	1	3
Won't Fix	0	5	2	1	8
Totals	24	15	13	25	77

2. Test Case Analysis

Section	Total Cases	Not Tested	Fail	Pass
Print Engine	5	0	1	4


Client Application	47	0	2	45
Security	3	0	0	3
Outsource Shipping	2	0	0	2
Exception Reporting	11	0	2	9
Final Report Output	5	0	0	5
Version Control	3	0	1	2

9. RESULTS

1.User Registration :


Users get registered to the app using their mail and create their password. On the user is registered a verification mail will be sent to the user mail id. The user needs to verify the account. All user details are stored in the firebase and verification mail is sent by firebase authentication .

Registration Page :

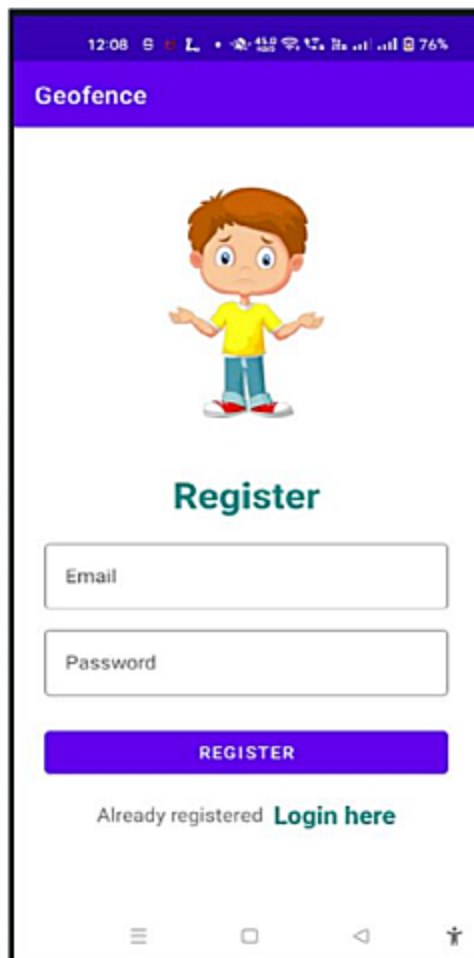

The screenshot shows a mobile application interface for a page titled "Geofence". At the top, there is a status bar with the time 12:08 and various icons. Below the title bar, there is a cartoon illustration of a boy with brown hair, wearing a yellow shirt and blue pants, with his arms outstretched. Below the illustration, the word "Register" is displayed in a green, bold font. Underneath, there are two input fields: "Email" and "Password". Below these fields is a blue button with the text "REGISTER" in white. At the bottom of the form, there is a link that says "Already registered [Login here](#)". The bottom of the screen shows a standard Android navigation bar with icons for the app drawer, home, back, and search.

Verification mail:

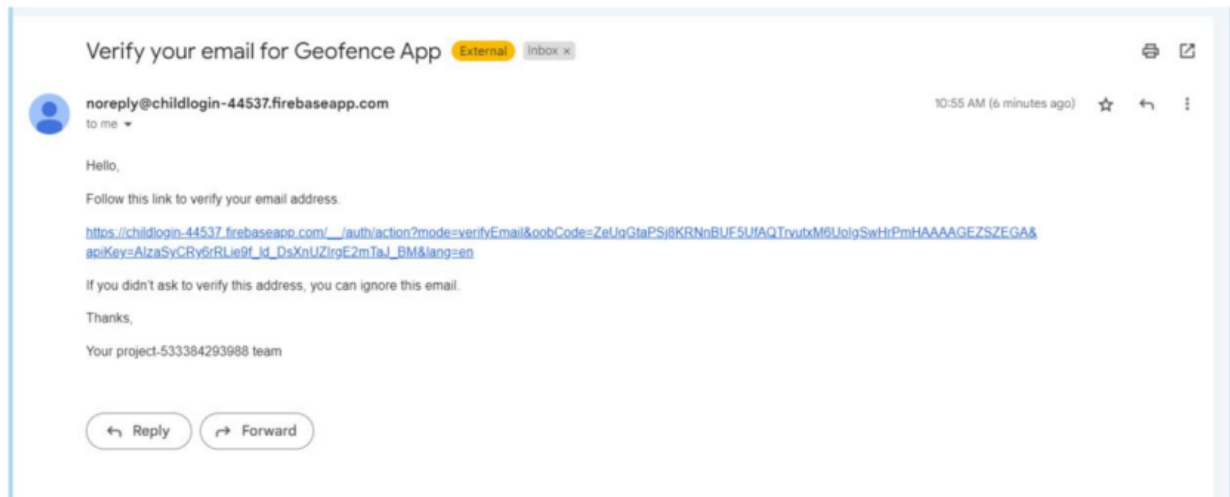


2. User Login:

Users with their registered mail and password will login to the account . As the details are stored in firebase, when invalid email or password is entered a message say invalid email or password occur .

Login page :

12-26 8 100% 75%

Geofence



Login

Email


Password

LOGIN

Not registered yet [Register here](#)

☰ □ ◀ ▶

User Details:

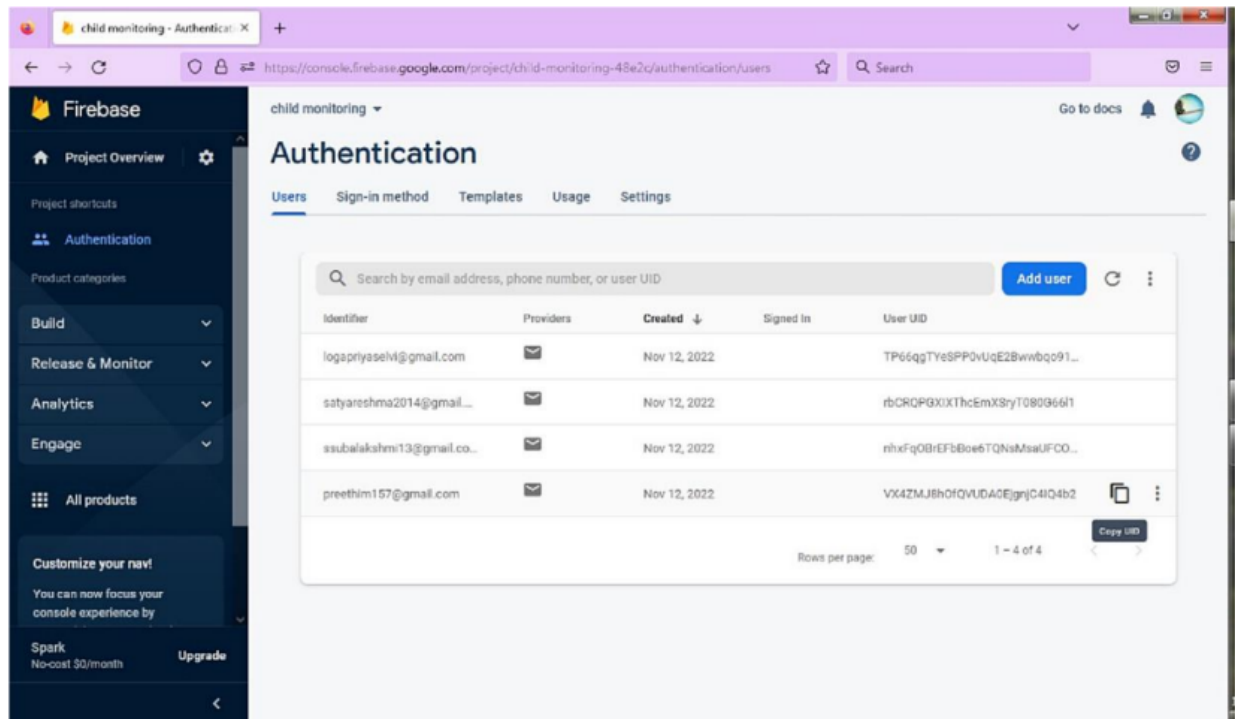


The screenshot shows the Firebase Authentication console for a project named 'child monitoring'. The left sidebar contains the Firebase logo and navigation links for Project Overview, Authentication, Build, Release & Monitor, Analytics, Engage, and All products. The main content area is titled 'Authentication' and includes tabs for Users, Sign-in method, Templates, Usage, and Settings. A search bar at the top of the Users tab allows searching by email address, phone number, or user UID. Below the search bar is a table listing four users, all created on Nov 12, 2022. The table columns are Identifier, Providers, Created, Signed In, and User UID. At the bottom right of the table, there is a 'Rows per page' dropdown set to 50 and a 'Copy UID' button.

Identifier	Providers	Created	Signed In	User UID
logapriyasehi@gmail.com		Nov 12, 2022		TP66qgTYeSPp0vUqE2Bwwbqo91...
satyareshma2014@gmail...		Nov 12, 2022		rbCRQPGXIXThcEmXSryT080G66t1
ssubalakshmi13@gmail.co...		Nov 12, 2022		nhxfFq0BtEFbBoe6TQNsMsaUFCO...
preethim157@gmail.com		Nov 12, 2022		VX4ZMU8hOfQVUDa0EjgrjC4IQ4b2


3. Adding Geofence and Alert Notification:

Users can add geofence in the location where they want to add or where their child is going to play so they can monitor the child location . Once the child enters the geofence alert notification says entered the location will be displayed . When the child leaves the geofence alert notification says exited the location will be displayed.

Geofence

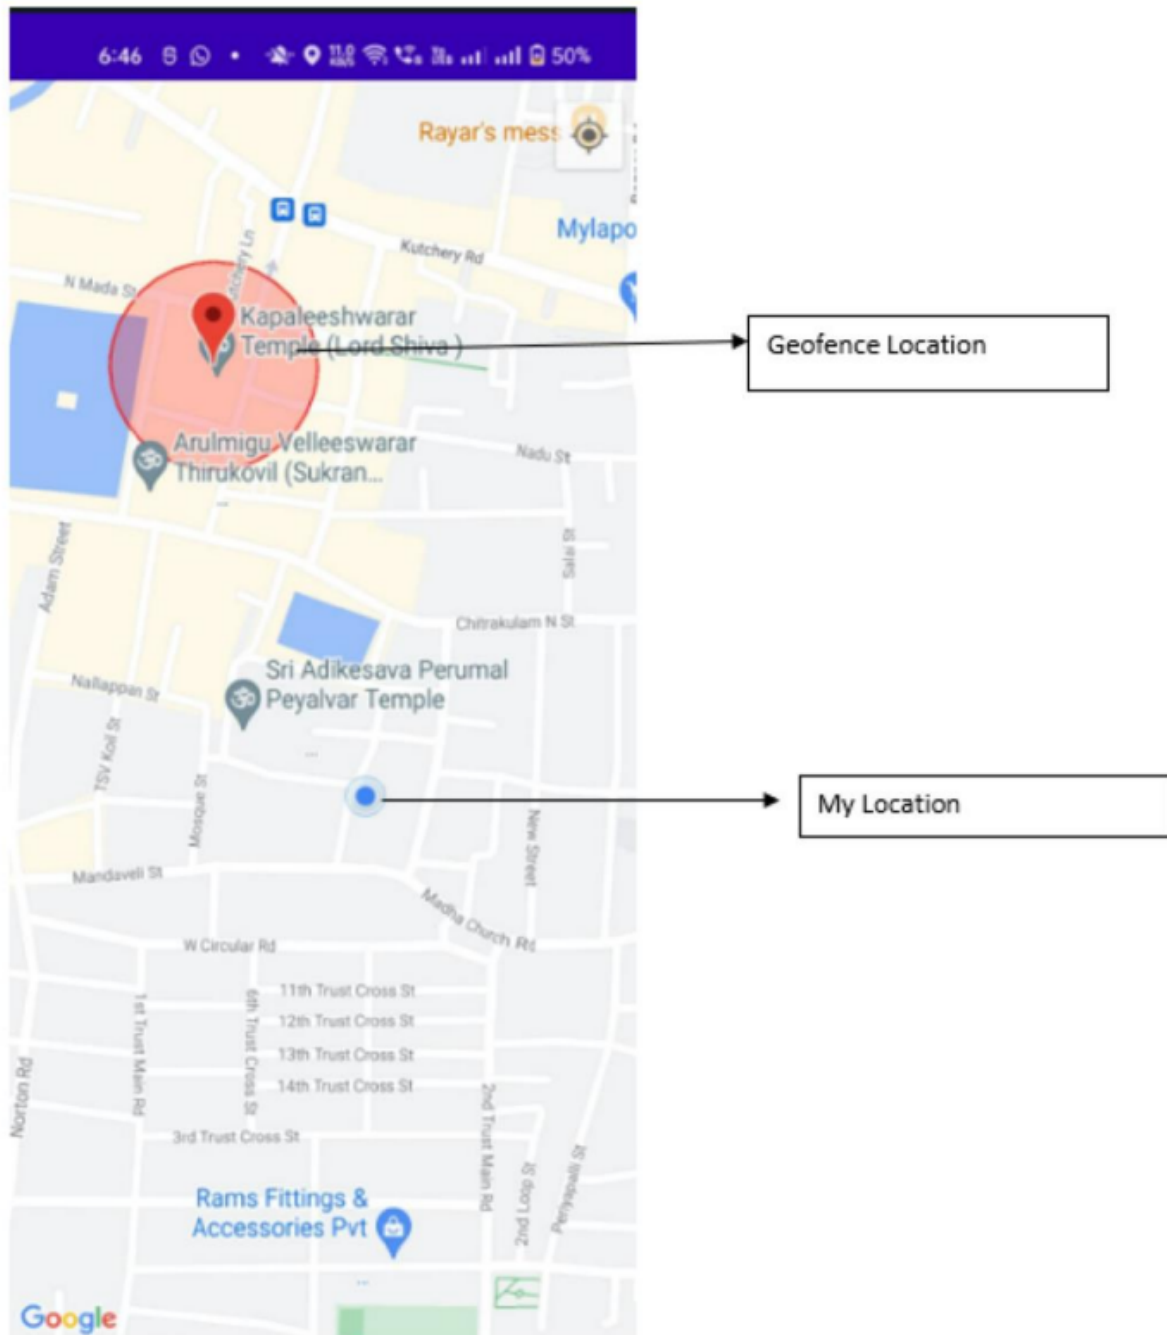

Notification

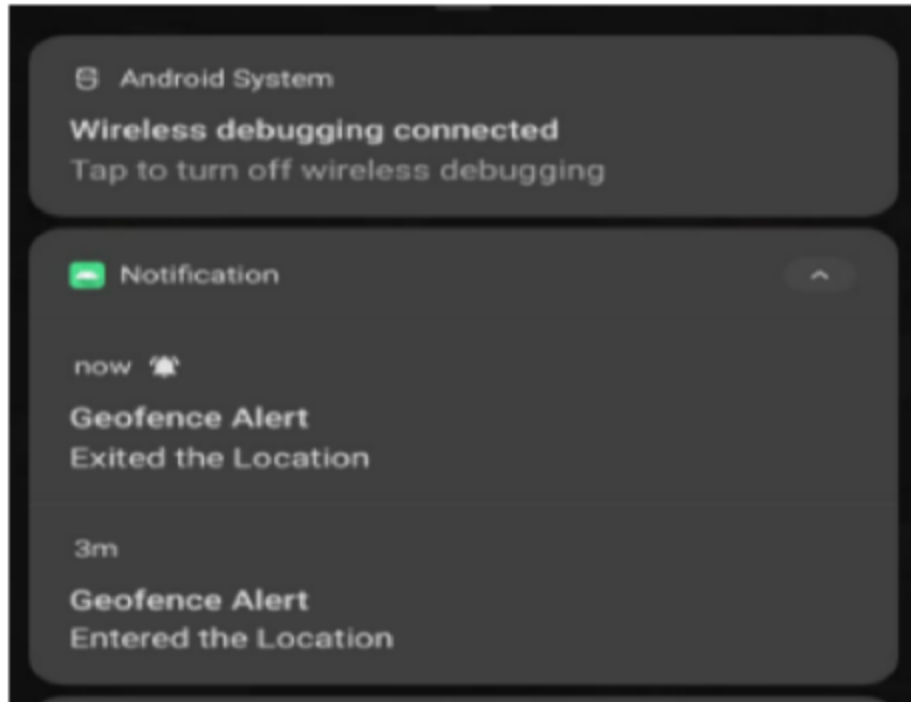

10. Advantages and Disadvantages

The parent can monitor their child from anywhere at any time, and also get a notification when the child goes away from the permitted radius. It also allows the parent to know if their child is in any dangerous situation. The disadvantages of this system are that the child could not produce the exact alert command during a panic condition. The command produced may not match the previously stored command. This project requires manual intervention.

11. Future Scope

In our system, we use the Internet of Things, GPS, GSM, and Raspberry Pi to automatically monitor the youngster in real time. When we utilize a web camera and GPS to actively monitor, this system needs network connections, satellite communication, and a high-speed data connection. It is challenging to keep an eye out for any network problems or satellite connection problems. Additionally, there is a lag when streaming videos through the server. The Zigbee concept or accessing the system without the internet and employing high-speed server transmission can


therefore be used in the future to solve these problems.

12. Conclusion

Future is similar to the word children. Young people are the future pillars of one's nation, as Dr. A.P.J. Abdul Kalam once said, thus it is important to protect today's children's dreams and lives in order to give them a better future. Therefore, every parent should take good care of their own children to prevent them from being victims of abuse that will completely harm them on a physical, mental, and emotional level, wrecking our future. Due to the significance of our future, our product makes it simple for parents to track their kids and regularly visually monitor them, enabling them to assure their safety and lowering the incidence of child abuse.

13 Appendix

13.1 Source code

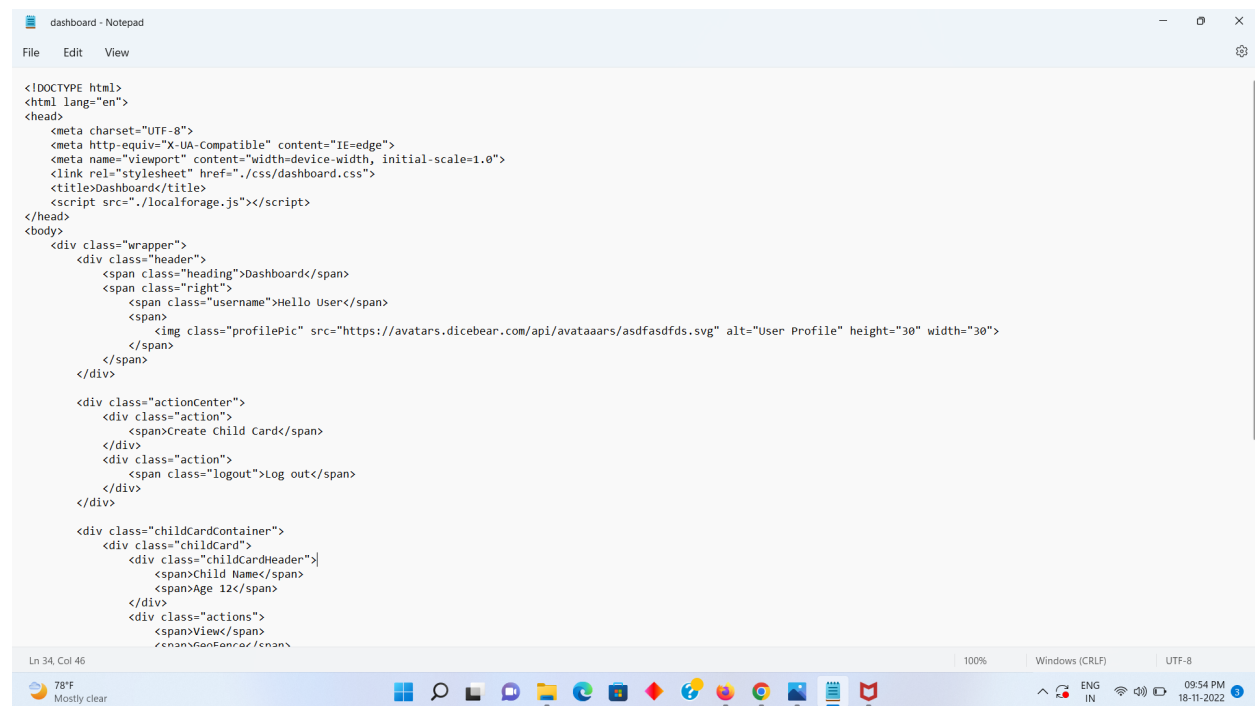

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <link rel="stylesheet" href="./css/dashboard.css">
  <title>Dashboard</title>
  <script src="./localforage.js"></script>
</head>
<body>
  <div class="wrapper">
    <div class="header">
      <span class="heading">Dashboard</span>
      <span class="right">
        <span class="username">Hello User</span>
        <span>
          
        </span>
      </span>
    </div>
    <div class="actionCenter">
      <div class="action">
        <span>Create Child Card</span>
      </div>
      <div class="action">
        <span class="logout">Log out</span>
      </div>
    </div>
    <div class="childCardContainer">
      <div class="childCard">
        <div class="childCardHeader">
          <span>Child Name</span>
          <span>Age 12</span>
        </div>
        <div class="actions">
          <span>View</span>
        </div>
      </div>
    </div>
  </div>
</body>
</html>
```

```
register - Notepad
File Edit View

<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <link rel="stylesheet" href="/css/login.css">
  <title>Sign Up</title>
  <script>
    if (window.location.hostname !== "localhost") {
      if (location.protocol !== "https:") {
        location.replace(
          'https:${location.href.substring(
            location.protocol.length
          )}'
        )
      }
    }
  </script>
  <script src="/localforage.js"></script>
</head>
<body>
  <div class="wrapper">
    <div class="loginContainer">
      <span>Login to Continue</span>
      <div class="traditionalLoginContainer">
        <form class="signupForm" action="/" method="post">
          <input type="text" name="firstName" placeholder="First Name" id="firstName">
          <input type="text" name="lastName" placeholder="Last Name" id="lastName">
          <input type="text" name="username" placeholder="User Name" id="username">
          <input type="email" name="email" placeholder="Email" id="email">
          <input type="password" name="password" placeholder="Password" id="password">
          <input class="loginButton" type="submit" value="Sign Up">
        </form>
      </div>
      <div class="loginWithFireContainer">
        <button type="button" class="fire" title="Login with Fire 🔥" id="fire">Login with Fire 🔥</button>
      </div>
      <a class="hyperLink" href="/login">Already have an Account? Login </a>
    </div>
  </div>
</body>
</html>
```

```
login - Notepad
File Edit View

<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <link rel="stylesheet" href="/css/login.css">
  <title>Sign Up</title>
  <script>
    if (window.location.hostname !== "localhost") {
      if (location.protocol !== "https:") {
        location.replace(
          'https:${location.href.substring(
            location.protocol.length
          )}'
        )
      }
    }
  </script>
  <script src="/localforage.js"></script>
</head>
<body>
  <div class="wrapper">
    <div class="loginContainer">
      <span>Signup To Continue</span>
      <div class="traditionalLoginContainer">
        <form class="signupForm" action="/" method="post">
          <input type="email" name="email" placeholder="Email" id="email">
          <input type="password" name="password" placeholder="Password" id="password">
          <input class="loginButton" type="submit" value="Login">
        </form>
      </div>
      <div class="loginWithFireContainer">
        <button type="button" class="fire" title="Login with Fire 🔥" id="fire">Login with Fire 🔥</button>
      </div>
      <a class="hyperLink" href="/register">Don't have an Account? Register </a>
    </div>
  </div>
</body>
</html>
```

```
index - Notepad
File Edit View

<!DOCTYPE html>
<html lang="en" style="height: 100%; margin: 0;">
  <head>
    <meta charset="UTF-8" />
    <meta name="description" content="The Home Page after Logged In" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <title>IoT Based Safety Gadget for Child Safety Monitoring and Notification</title>
    <script src="./localforage.js"></script>
    <script>
      if (window.location.hostname !== "localhost") {
        if (location.protocol !== "https:") {
          location.replace(
            `https:${location.href.substring(
              location.protocol.length
            )}`
          )
        }
      }

      async function check() {
        let data = localforage.getItem("userData")
        if (data == null) {
          window.location.href = "/login"
        }
      }
      check()
    </script>
  </head>
  <body
    style="
      height: 100%;
      margin: 0;
      font-weight: 300;
      font-family: -apple-system, BlinkMacSystemFont, 'Segoe UI', Roboto,
        Oxygen, Ubuntu, Cantarell, 'Open Sans', 'Helvetica Neue',
        sans-serif;
    "
  >
    <div
      class="unannon"
    >
  </div>
</body>
</html>
```

Ln 91, Col 8

100% Windows (CRLF) UTF-8


78°F Mostly clear

10:25 PM 18-11-2022

OUTPUT

12-26 8:00 • 4G LTE 75%

Geofence



Login

LOGIN

Not registered yet [Register here](#)

☰ □ ◀ ▶

13.2 GitHub and Project demo link

Github Link:

<https://github.com/IBM-EPBL/IBM-Project-42508-1660665509>

Demo Link: