Team ID : PNT2022TMID52039

Project Title : Signs with Smart Connectivity for Better Road Safety

Process Flow :

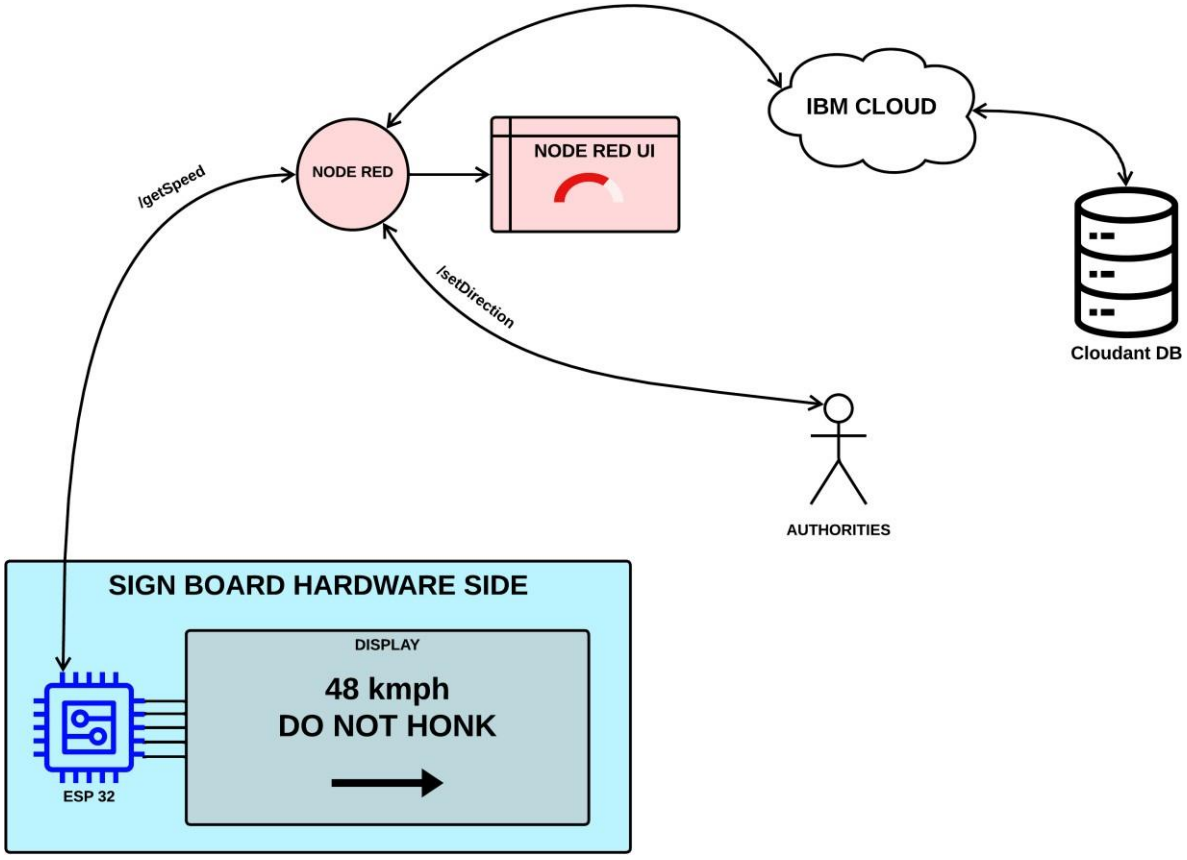

Code Flow :

Node RED :

Node RED flow :

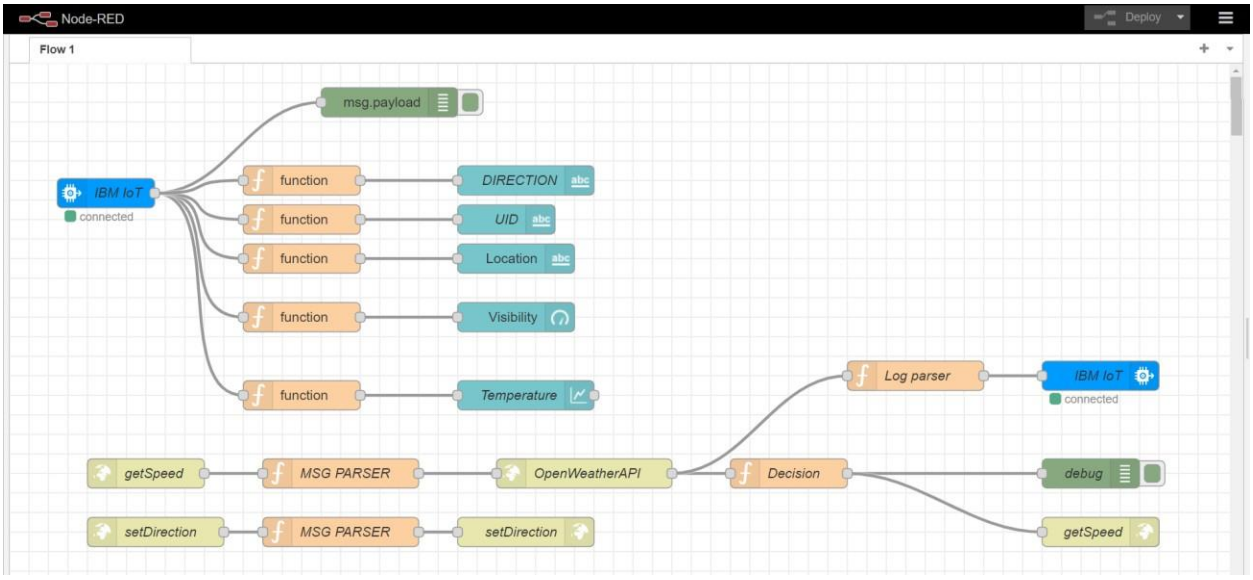

There are 3 flows in the above Node RED flow. They are

1. Node RED UI flow
2. /getSpeed API flow
3. /setDirection API flow

1. Node RED UI flow :

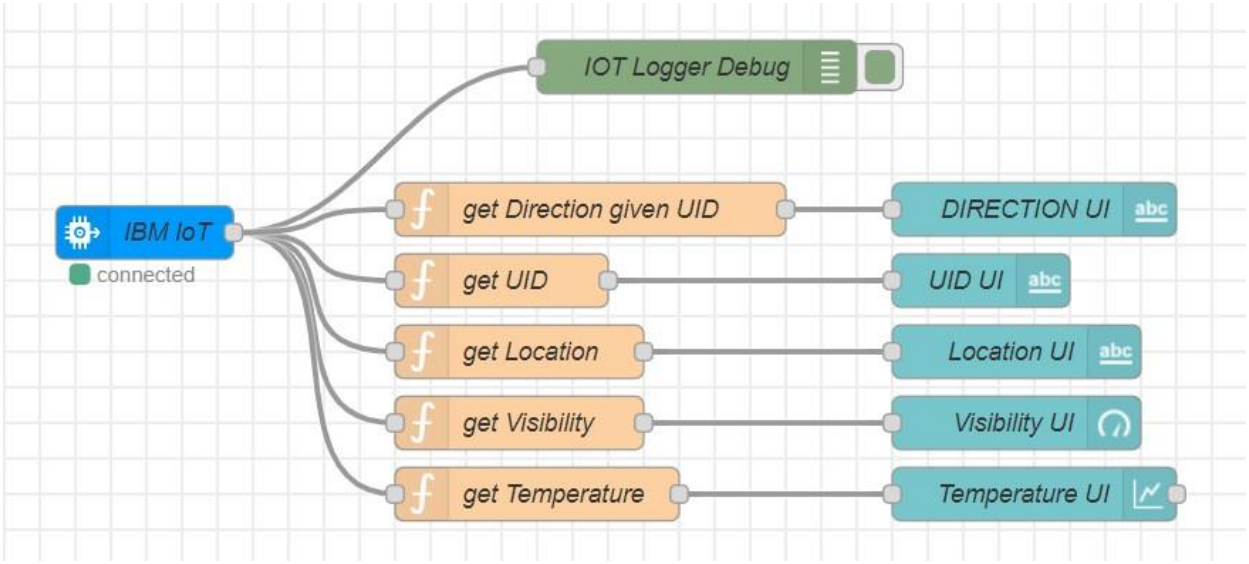

1. **"IBM IOT"** node connects the backend to Node RED UI
2. The function nodes such as **"get Direction given UID"**, **"get UID"**, **"get Location"**, **"get Visibility"** & **"get Temperature"** extract the respective

data out and provides them to the UI nodes "**Direction UI**", "**UID UI**", "**Location UI**", "**Visibility UI**" & "**Temperature UI**".

```
// get Direction given UID
msg.payload = global.get(String(msg.payload.uid));
return msg;

// get UID
msg.payload = msg.payload.uid;
return msg;

// get Location
msg.payload = msg.payload.location;
return msg;

// get Visibility
msg.payload = msg.payload.visibility;
return msg;

// get Temperature
msg.payload = msg.payload.temperature;
return msg;
```

3. "**IOT Logger Debug**" node logs the data at debugger.

---

2. /getSpeed API flow :

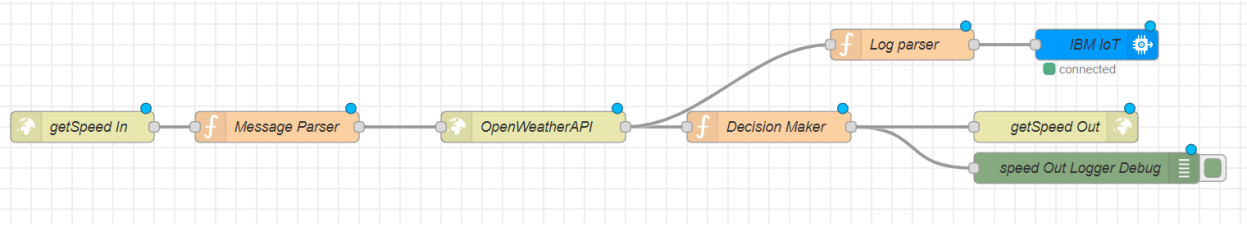

1. "**getSpeed In**" node is an http end point. It accepts parameters like microcontroller UID, location, school & hospital zones info.

2. "**Message Parser**" node parses the data and passes on only required information to the next node

```
global.set("data",msg.payload);
```

```
msg.payload.q = msg.payload.location;
msg.payload.appid = "bf4a8d480ee05c00952bf65b78ae826b";
return msg;
```

3. **"OpenWeatherAPI"** node is a http request node which calls the OpenWeather API and send the data to the next node.

4. **"Log Parser"** node extracts specific parameters from the weather data and and sends it to the next node.

```
weatherObj = JSON.parse(JSON.stringify(msg.payload));
localityObj = global.get("data");

var suggestedSpeedPercentage = 100;

var preciseObject = {
   temperature : weatherObj.main.temp - 273.15,
   location : localityObj.location,
   visibility : weatherObj.visibility/100,
   uid : localityObj.uid,
   direction : global.get("direction")
};

msg.payload = preciseObject;

return msg;
```

5. **"IBM IoT"** node here (IBM IoT OUT)connects the **"IBM IoT"** node (IBM IoT IN) metioned in the **Node RED UI flow** which enables UI updation and logging.

6. **"Decision Maker"** node processes the weather data and other information from the micro controller to form the string that is to be displayed at the Sign Board

```
weatherObj = JSON.parse(JSON.stringify(msg.payload));
localityObj = global.get("data");

var suggestedSpeedPercentage = 100;
```

```
var preciseObject = {
   temperature : weatherObj.main.temp - 273.15,
   weather : weatherObj.weather.map(x=>x.id).filter(code => code<700),
   visibility : weatherObj.visibility/100
};

if(preciseObject.visibility<=40)
   suggestedSpeedPercentage -=30

switch(String(preciseObject.weather)[-1]) // https://openweathermap.org/weather-conditions refer weather codes meaning here
{
   case "0" : suggestedSpeedPercentage -=10;break;
   case "1" : suggestedSpeedPercentage -=20;break;
   case "2" : suggestedSpeedPercentage -=30;break;
}

msg.payload = preciseObject;

var doNotHonk = 0;
if(localityObj.hospitalZone=="1"||localityObj.schoolZone=="1")
   doNotHonk = 1;

var returnObject = {
   suggestedSpeed :
localityObj.usualSpeedLimit*(suggestedSpeedPercentage/100),
   doNotHonk : doNotHonk
}

msg.payload = String(returnObject.suggestedSpeed) + " kmph \n\n" +
(returnObject.doNotHonk==1?"Do Not Honk":"") + "$" +
global.get(String(localityObj.uid));

return msg;
```

7. **"getSpeed Out"** node returns a http response for the request at node **"getSpeed In"**.

8. **"speed Out Logger Debug"** logs the data for debugging.

---

3. /setDirection API flow :

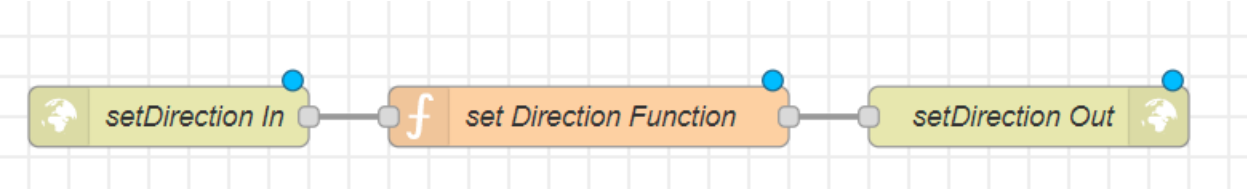

1. **"setDirection In"** node is an http end point. It accepts parameters like microcontroller UID & direction.

2. **"set Direction Function"** node sets the direction for the given UID.

```
global.set(String(msg.payload.uid),msg.payload.dir);
return msg;
```

3. **"setDirection Out"** node returns a http response for the request at node **"setDirection In"**.

Wokwi Circuit :

Wokwi Code

Wokwi Link

Circuit Diagram :

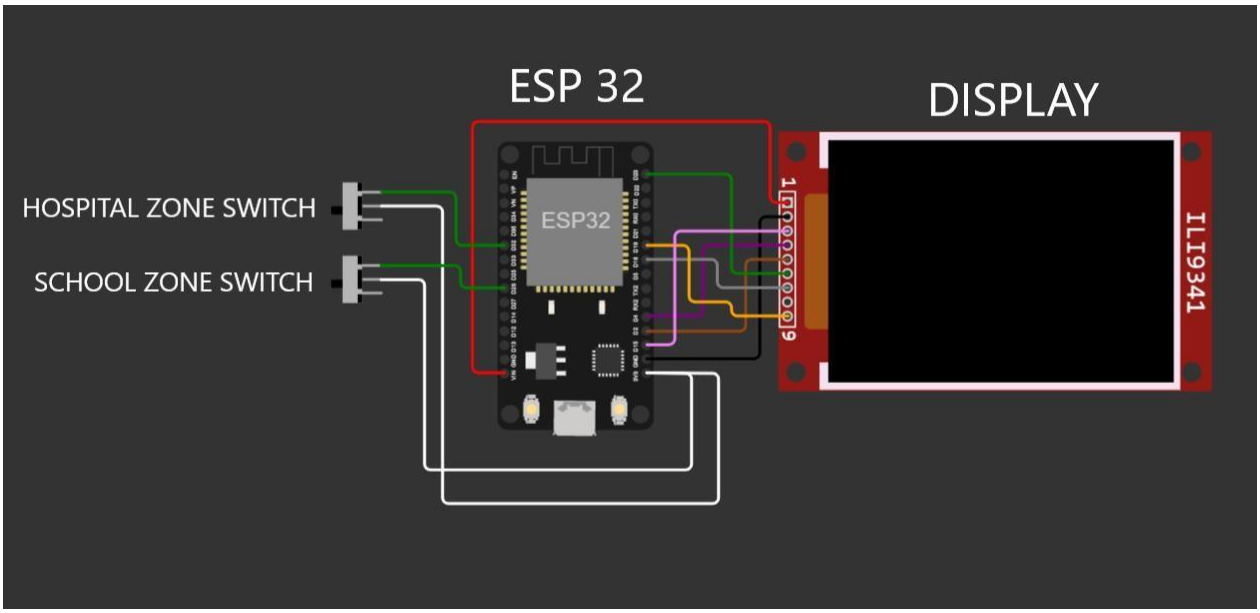

ESP 32 CODE :

```
#include <WiFi.h>
#include <HTTPClient.h>
#include <Adafruit_GFX.h>
#include <Adafruit_ILI9341.h>
#include <string.h>

const char* ssid = "Wokwi-GUEST";
const char* password = "";

#define TFT_DC 2
#define TFT_CS 15
Adafruit_ILI9341 tft = Adafruit_ILI9341(TFT_CS, TFT_DC);

String myLocation = "Chennai,IN";
String usualSpeedLimit = "70"; // kmph

int schoolZone = 32;
int hospitalZone = 26;

int uid = 2504; // ID Unique to this Micro Contoller
```

```
String getString(char x)
{
   String s(1, x);
   return s;
}

String stringSplitter1(String fullString,char delimiter='$')
{
   String returnString = "";
   for(int i = 0; i<fullString.length();i++) {
      char c = fullString[i];
      if(delimiter==c)
         break;
      returnString+=String(c);
   }
   return(returnString);
}

String stringSplitter2(String fullString,char delimiter='$')
{
   String returnString = "";
   bool flag = false;
   for(int i = 0; i<fullString.length();i++) {
      char c = fullString[i];
      if(flag)
         returnString+=String(c);
      if(delimiter==c)
         flag = true;
   }
   return(returnString);
}

void rightArrow()
{
  int refX = 50;
  int refY = tft.getCursorY() + 40;

  tft.fillRect(refX,refY,100,20,ILI9341_RED);
tft.fillTriangle(refX+100,refY-
30,refX+100,refY+50,refX+40+100,refY+10,ILI9341_RED);
```

```
}

void leftArrow()
{
  int refX = 50;
  int refY = tft.getCursorY() + 40;

  tft.fillRect(refX+40,refY,100,20,ILI9341_RED);
  tft.fillTriangle(refX+40,refY-30,refX+40,refY+50,refX,refY+10,ILI9341_RED);
}

void upArrow()
{
  int refX = 125;
  int refY = tft.getCursorY() + 30;

  tft.fillTriangle(refX-40,refY+40,refX+40,refY+40,refX,refY,ILI9341_RED);
  tft.fillRect(refX-15,refY+40,30,20,ILI9341_RED);
}

String APICall() {
  HTTPClient http;

  String url = "https://node-red-grseb-2022-11-05-test.eu-
gb.mybluemix.net/getSpeed?";
  url += "location="+myLocation+"&";
  url += "schoolZone="+(String)digitalRead(schoolZone)+(String)"&";
  url += "hospitalZone="+(String)digitalRead(hospitalZone)+(String)"&";
  url += "usualSpeedLimit="+(String)usualSpeedLimit+(String)"&";
  url += "uid="+(String)uid;
  http.begin(url.c_str());
  int httpResponseCode = http.GET();

  if (httpResponseCode>0) {
    String payload = http.getString();
    http.end();
    return(payload);
  }
  else {
    Serial.print("Error code: ");
```

```
    Serial.println(httpResponseCode);
  }
  http.end();
}

void myPrint(String contents) {
  tft.fillScreen(ILI9341_BLACK);
  tft.setCursor(0, 20);
  tft.setTextSize(4);
  tft.setTextColor(ILI9341_RED);
  //tft.println(contents);

  tft.println(stringSplitter1(contents));
  String c2 = stringSplitter2(contents);
  if(c2=="s") // represents Straight
  {
    upArrow();
  }
  if(c2=="l") // represents left
  {
    leftArrow();
  }
  if(c2=="r") // represents right
  {
    rightArrow();
  }
}

void setup() {
  WiFi.begin(ssid, password, 6);

  tft.begin();
  tft.setRotation(1);

  tft.setTextColor(ILI9341_WHITE);
  tft.setTextSize(2);
  tft.print("Connecting to WiFi");

  while (WiFi.status() != WL_CONNECTED) {
    delay(100);
```

```
    tft.print(".");
  }

  tft.print("\nOK! IP=");
  tft.println(WiFi.localIP());
}

void loop() {
  myPrint(APICall());
  delay(100);
}
```

Output :

Node RED Dashboard :

[LINK TO NODE RED DASHBOARD]

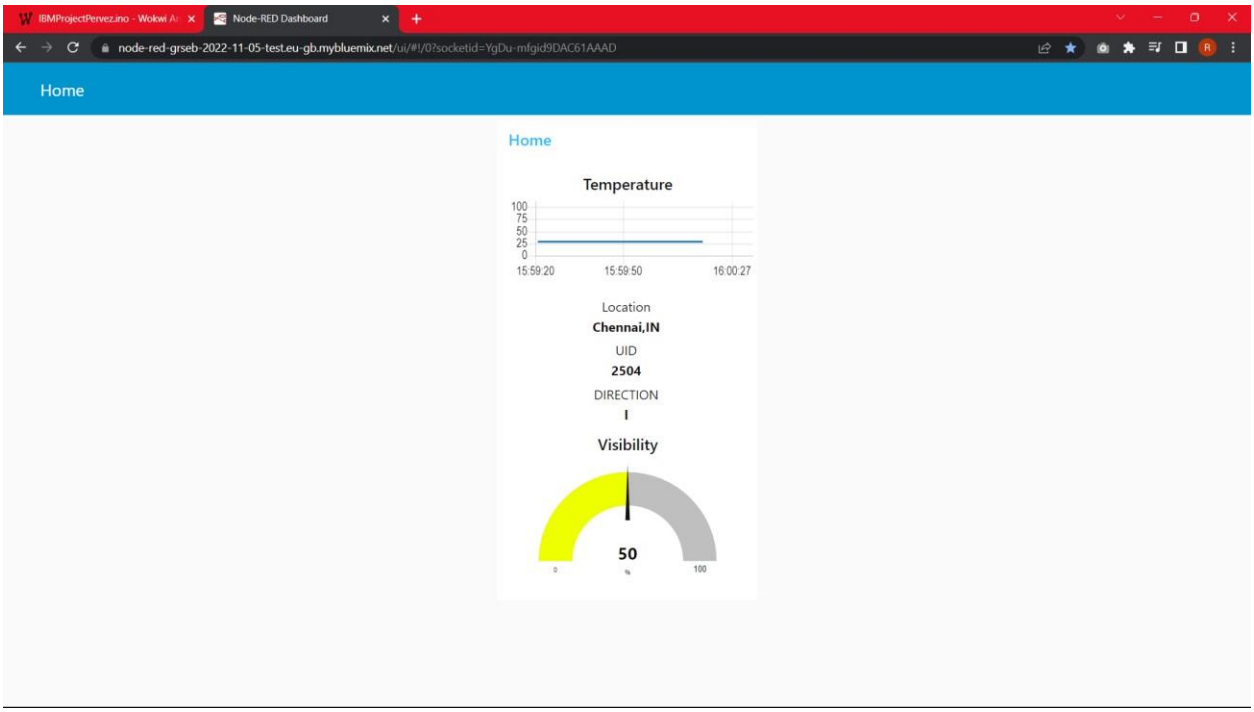

Wokwi Output :

[LINK TO WOKWI PROJECT]

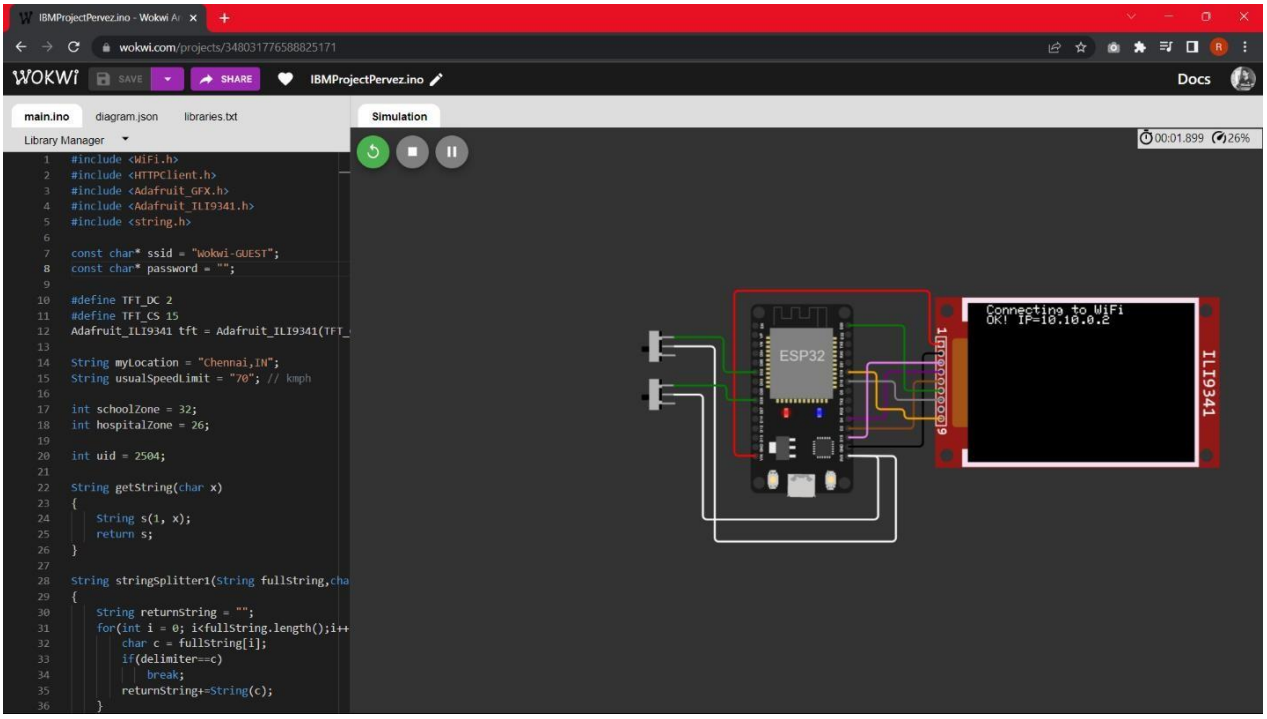

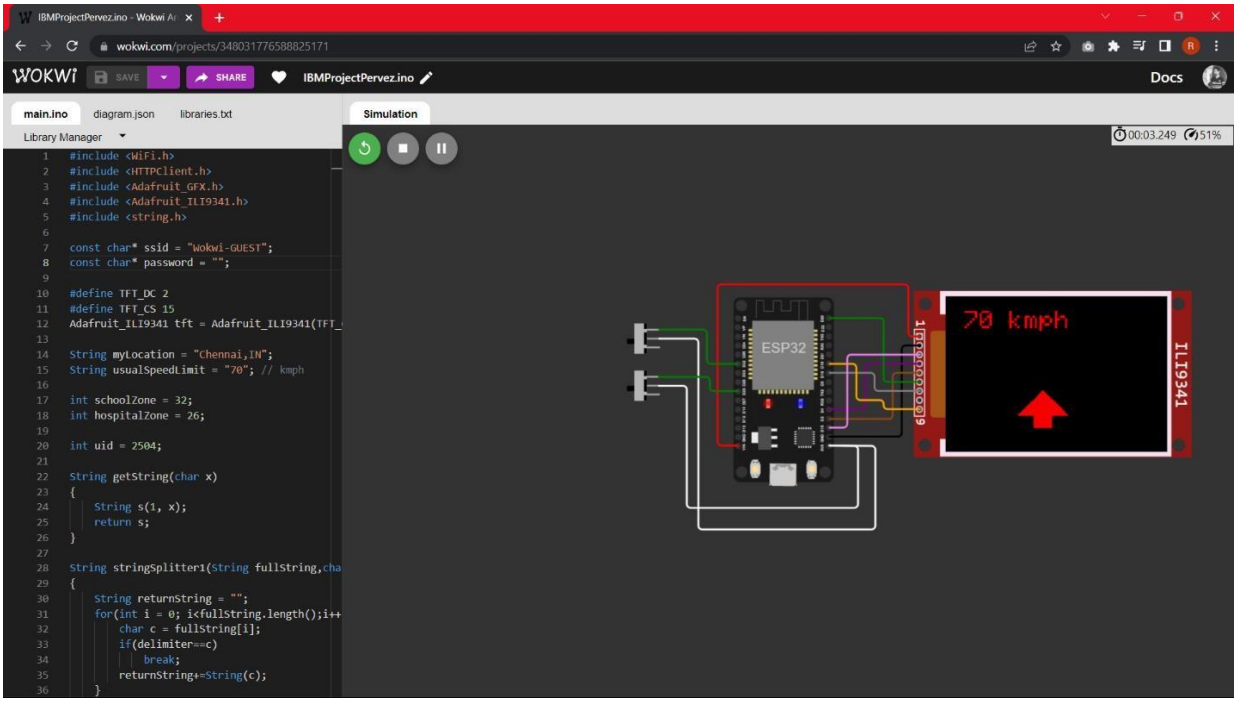

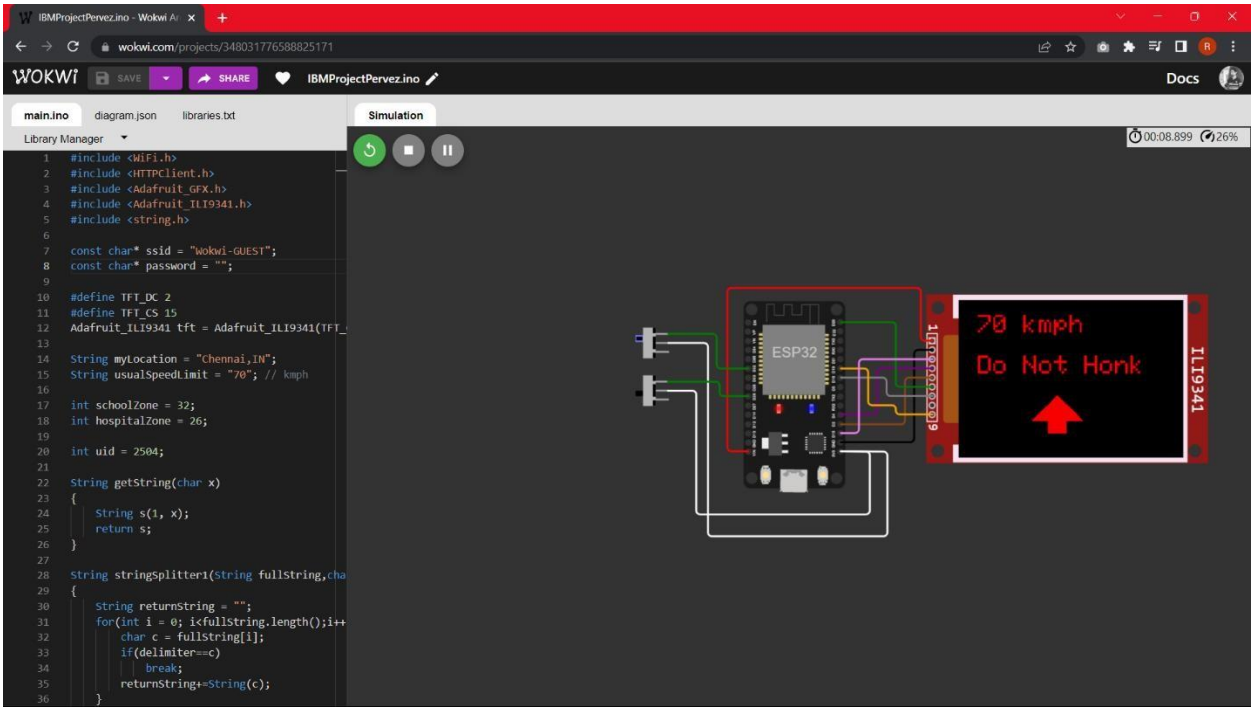
IBMProjectPervez.ino - Wokwi
wokwi.com/projects/348031776588825171
WOKWI
SAVE
SHARE
IBMProjectPervez.ino
Docs
main.ino
diagram.json
libraries.txt
Library Manager
Simulation
00:08.899
26%
#include <WiFi.h>
#include <HTTPClient.h>
#include <Adafruit_GFX.h>
#include <Adafruit_ILI9341.h>
#include <string.h>
const char* ssid = "Wokwi-GUEST";
const char* password = "";
#define TFT_DC 2
#define TFT_CS 15
Adafruit_ILI9341 tft = Adafruit_ILI9341(TFT_
String myLocation = "Chennai,IN";
String usualSpeedLimit = "70"; // kmph
int schoolZone = 32;
int hospitalZone = 26;
int uid = 2504;
String getString(char x)
{
String s(1, x);
return s;
}
String stringSplitter1(String fullString,cha
{
String returnString = "";
for(int i = 0; i<fullString.length();i++
char c = fullString[i];
if(delimiter==c)
break;
returnString+=String(c);
}
ESP32
70 kmph
Do Not Honk
ILI9341

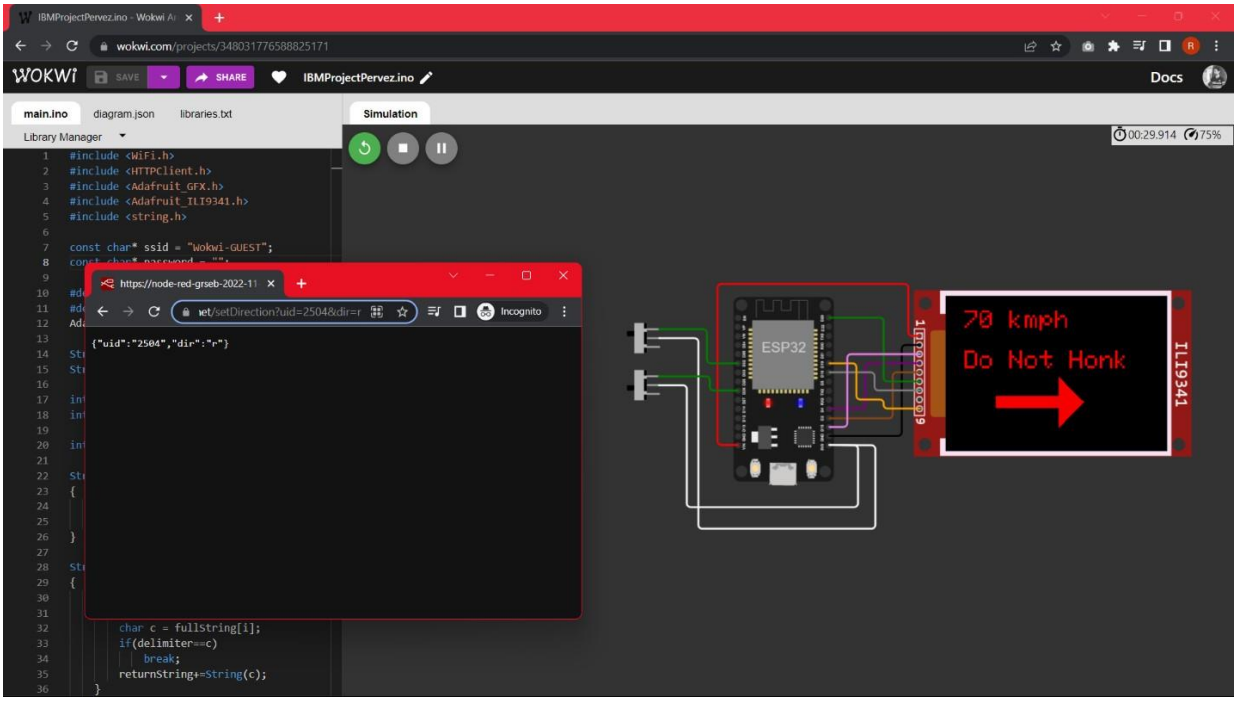
IBMProjectPervez.ino - Wokwi
wokwi.com/projects/348031776588825171
WOKWI
SAVE
SHARE
IBMProjectPervez.ino
Docs
main.ino
diagram.json
libraries.txt
Library Manager
Simulation
00:29.914
75%
https://node-red-grseb-2022-11
Incognito
{"uid":"2504","dir":"r"}
ESP32
70 kmph
Do Not Honk
ILI9341

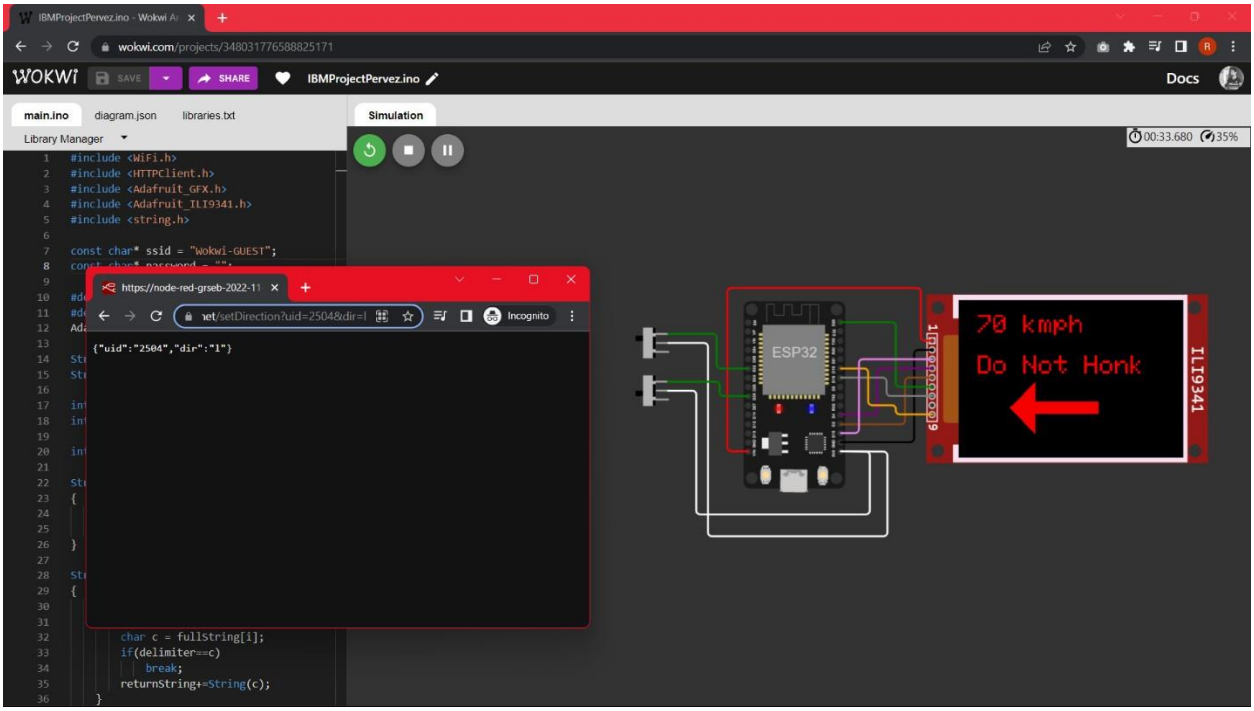
IBMProjectPervez.ino - Wokwi
wokwi.com/projects/348031776588825171
WOKWI
SAVE
SHARE
IBMProjectPervez.ino
Docs
main.ino
diagram.json
libraries.txt
Library Manager
Simulation
00:33.680
35%
#include <WiFi.h>
#include <HTTPClient.h>
#include <Adafruit_GFX.h>
#include <Adafruit_ILI9341.h>
#include <string.h>
const char* ssid = "Wokwi-GUEST";
https://node-red-grseb-2022-11
Incognito
{"uid":"2504","dir":"1"}
char c = fullString[i];
if(delimiter==c)
break;
returnString+=String(c);
ESP32
70 kmph
Do Not Honk
ILI9341