IOT Based Safety Gadget for Child Safety Monitoring & Notification

In partial fulfillment of the requirement   for the award of the Degree of

BACHELOR OF ENGINEERING

Submitted by

MOHAMMED ASLAM A	**(730219104021)**
DINESH U	**(730219104007)**
NIYAS AM	**(730219104305)**
THILLAI RAJAN M	**(730219104032)**

AL-AMEEN ENGINEERING COLLEGE

(Autonomous)

ERODE-638 104

NOV 2022

ABSTRACT

This paper is mainly streamed towards child safety solutions by developing a gadget which can be tracked via its GPS locations and also a panic button on gadget is provided to alert the parent via GSM module calling for help. Parental android app is developed to manage and track the device anytime. Smart gadget device is always connected to parental phone which can receive and make phone calls and also receive SMS on gadget via GSM module, also a wireless technology is implemented on device which is useful to bound the device within a region of monitoring range, if device is moving out of monitoring range then an alert will be triggered on binding gadget, this helps you keep a virtual eye on child. Health monitoring system on gadget checking for parameters like heart beat/pulse rate and temperature is included which can be monitored on parental app. Gadget also monitors whether it is plugged on hand or not using contact switch and alert the parent as soon as it is unplugged.

-

TABLE OF CONTENT

1. Introduction

1.1 Project Overview

Creating a device that can be followed using GPS locationsand has a panic button to inform the parent via a GSM module, this invention is primarily focused on improving child safety. An Android app for parents is created to control and monitor the device at any time. Smart gadget devices are always connected to parents' phones, which can receive and make phone calls as well as SMS gadget via a GSM module. Additionally,wireless technology is implemented on the device, which is useful to bind the device within a region of monitoring range; if the device is moving out of monitoring range, an alert will be triggered on a binding gadget, helping you maintain a virtual watch over the child. An alert will be sent to a bound device if the device moves outside of the monitoring range, allowing you to keep a virtual check on the child. Devices come with a health monitoring system that checks for factors including heart rate, pulse, and temperature. The parental app allows for the monitoring of these indicators. Using a contact switch, the device also keeps track of whether or not it is plugged in and notifies the parent the moment it is unplugged.

1.2 Purpose

Approximately 80% of all reports of child abuse are made nowadays, with 74% of the victims being girls and the remaining 20% being males. In this world, a child goes missing every forty seconds. Children are the foundation of a country; if their future was threatened, it would have an effect on the development of the whole country.

The emotional and mental stability of the children is compromised as a result of the abuse, ruining their futures and careers. The things that happen to these defenseless kids are not their fault. Therefore, parents are in charge of raising their own children. However, parents are compelled to seek money because of the state of the economy and their desire to concentrate on their child's future and job. Consequently, it becomes challenging for them to constantly cling to their kids. We have created a setting in our system where this issue can be effectively solved. It enables parents to keep a close eye on their kids in real time while concentrating on their own careers without having to take any physical action. In essence, kids cannot tell their parents about the abuse they experience on a regular basis. They are too young to really comprehend what truly occurs to them. Parents find it challenging to recognize when their children are being abused. So, the main objective of this module is to help working parents to be free from worry about their children by tracking their movements at any time. An autonomous real-time monitoring system is required for every child worldwide in order to stop attacks on children.

2. Literature Survey

[1] **Authors:** Akash Moodbidri, Hamid Shahnasser
Title: Child safety wearable device.
Published in: 2017 IEEE. This gadget is designed to make it easier for parents to find their kids.
There are already a lot of wearables available on the market that may be used to track children's daily activity as well as to locate them utilizing the Wi-Fi and Bluetooth capabilities of the device.
Merits: The advantage of this wearable over others is that it can be operated with any phone; a high-end smartphone is not necessary, and it doesn't require a person to be highly tech knowledgeable.
Demerits: Due to its low battery life, this device.

[2] **Authors:** M Nandini Priyanka, S Murugan, K. N. H. Srinivas, T. D. S. Sarveswararao, E. Kusuma Kumari.
Title: Smart IoT Device for Child Safety and Tracking.
Published in: 2019 IEEE.
The Link-It ONE board, programmed in embedded C, is used to construct the system. It is connected to temperature, heartbeat, touch, GPS, GSM, and digital camera modules. The work is innovative in that when a child is in need of rapid attention during an emergency, the system instantly notifies the parent or caregiver by sending an SMS.
Merits: The child's heartbeat, temperature, and touch are employed as parameters in a parametric analysis, and the results are shown.
Demerits: To put in place an IoT gadget that offers a comprehensive remedy for issues with child safety.

[3] **Authors:** Dheeraj Sunehera, Pottabhatini Laxmi Priya.
Title: Children Location Monitoring on Google Maps Using GPS and GSM.
Published in: 2016 IEEE.
This study offers parents an Android-based tool to follow their kids in real-time. Through internet-connected channels, various gadgets can communicate with one another. The concerned gadget has an internet connection to the server. Parents can use the gadget to keep track of their kids in real-time or to protect ladies. The location services offered by the GSM module are used in the suggested solution. It enables parents to receive an SMS with their child's location information.
Merits: Uses an Android terminal and ad hoc networks, a child tracking system.
Demerits: This device cannot be used in rural areas.

[4] **Authors:** Aditi Gupta, Vibhor Harit.
Published in: 2016 IEEE.
Title: Child Safety & Tracking Management System by using GPS.
This study offered a model for child safety using smartphones that give parents the option to track their children's whereabouts as well as the ability for kids to send a fast message and their current location in case of an emergency via Short Message Services.

**Merits:** The benefits of smartphones that offer a wealth of capabilities like GPS, SMS, Google Maps, etc.

Demerits: This system is unable to detect child-like human behavior.

References:

[1] Aditi Gupta, Vibhor Harit, 'Child Safety & Tracking Management System by using GPS, GeoFencing & Android Application: An Analysis,' 2016 Second International Conference on Computational Intelligence & Communication Technology.

[2] Dheeraj Sunehera, Pottabhatini Laxmi Priya, 'Children Location Monitoring on Google Maps Using GPS and GSM,' 2016 IEEE 6th International Conference on Advanced Computing.

[3] M Nandini Priyanka, S Murugan, K. N. H. Srinivas, T. D. S. Sarveswararao, E. Kusuma Kumari,

'Smart IoT Device for Child Safety and Tracking' International Journal of Innovative Technology and Exploring Engineering, Volume 8, Issue 8, June 2019.

[4] Akash Moodbidri, Hamid Shahnasser (Jan. 2017) 'Child safety wearable device', International Journal for Research in Applied Science & Engineering Technology, Vol. 6 Issue 2, pp. 438-444.

3. Ideation and Proposed Solution

3.1 Empathy map canvas
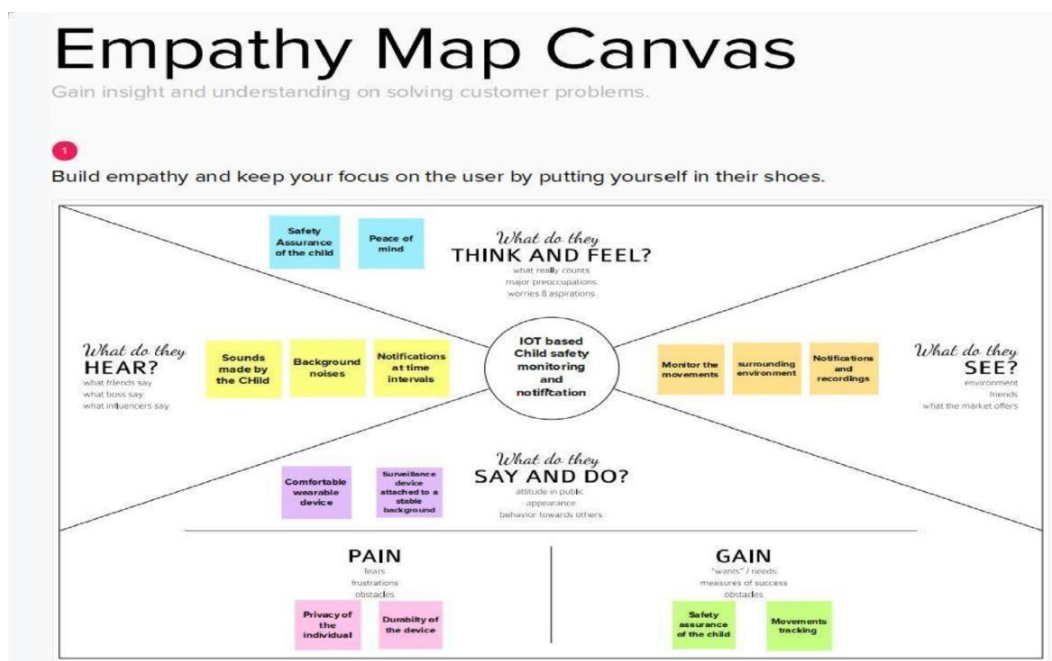
3.2 Ideation and brainstorming

Idea 1:

A compact wearable gadget with a pressure switch. The user can apply pressure to the device by squeezing or compressing itas soon as an attacker is preparing to attack the person or as soon as the person perceives any insecurity from a stranger. Instantaneouslythe pressure sensor detects this pressure, and a call is placed to the victim's parents' or guardian's mobile phone numbers that were put in the device at purchase, along with a regular SMS that includes the victim's location. The identical message will be delivered to the police if the call goes unanswered for an extended period of time. Further, a message with the person's current location is sent to the parent or guardian's phone by standard SMS if the person enters anarea that is typically offlimits to them.

Idea 2:

By creating a device that can be followed using GPS locations and has a panic button to inform the parent via a GSM module, this invention is primarily focused on improving child safety.An Android app for parents is created to control and monitor the device at any time. Smart gadget device is always connected to parents' phone, which can receive and make phone calls as well as SMS on gadget via GSM module. Additionally, wireless technology is

implemented on the device, which is useful to bind the device within a region of monitoring range; if the device is moving out of monitoring range, an alert will be triggered on a binding gadget, helping you maintain a virtual watch over the child. An alert will be sent to a bound device if the device moves outside of the monitoring range, allowing you to keep a virtual check on the child. Devices come with a health monitoring system that checks for factorsincluding heart rate, pulse, and temperature. The parental app allowsfor the monitoring of these indicators. Using a contact switch, the device also keeps track of whether or not it is plugged in and notifies the parent the moment it is unplugged.

Idea 3:

According to the latest surveys, the number of cases of child abduction and missing children in India is steadily rising. One of the primary worries for parents today is the safety of their children on school buses and outside of school premises, The suggested system makes an effort to give kids security features using new techniques that are introduced to the current safety system for better defense. Aportable unit, a cloud platform, and an Android application make up the proposed system. A raspberry pi 2 model B, a GPS receiver with antenna, and a pulse rate sensor make up the portable device. Usinga GPS receiver and a heartbeat sensor, this device will track the child's location in terms of latitude, longitude, and altitude. These data are transmitted to a raspberry pi module, which uses internet connectivity to inject them into elasticsearch. The android program has a user interface that displays the child's location on a map, the

path they took, and their rate of movement. The child'sheart rate is also continuously tracked by the application.

3.3   Proposed solution

S.No	Parameter	Description
1.	Problem Statement (Problem to be solved)	To prevent children for abuse and make them safe
2.	Idea / Solution description	compact wearable gadget with pressure but on which can the parentscan find the a acker easier
3.	Novelty / Uniqueness	Pressure but on with Gsm
4.	Social Impact / Customer Satisfaction	It is useful to working parents when they are leaving children
5.	Business Model (Revenue Model)	wearable gadget
6.	Scalability of the Solution	compact and easy to use

3.4 Problem solution fit

1. CUSTOMER SEGMENT(S) `CS`

Parents
CS: working parents whose children are 0-5yrs

6. CUSTOMER CONSTRAINTS `CC`

Budget
CC:The average visit of duration or last date of visit of customers

5. AVAILABLE SOLUTIONS `AS`

Wearable gadget-pressure sensor
AS:Today ,the recent technology which helps in wearable gadget is IOT based pressure button ,where in past days it is not implemented,because of which children can be safe

2. JOBS-TO-BE-DONE / PROBLEMS `J&P`

Creation of pressure sensor
J&P:The user can apply pressure to the device by squeezing and pressing and detect and call to the parents or guardian

9. PROBLEM ROOT CAUSE `RC`

Child monitoring
RC:Due to the attackers ,the for children is difficult.so,in order to overcome this,we have found latest technology of wearable child monitoring system

7. BEHAVIOUR `BE`

Better maintenance
BE:
1)In order to protect children
2)Parent's should do proper maintenance

3. TRIGGERS
What triggers customers to act? i.e. seeing their neighbor installing solar panels, reading about a more efficient solution in the news. `TR`

TR: On by watching neighbors

10. YOUR SOLUTION `SL`
If you are working on an existing business, write down your current solution first, fill in the canvas, and check how much it fits reality. If you are working on a new business proposition, then keep it blank until you fill in the canvas and come up with a solution that fits within customer limitations, solves a problem and matches customer behavior.

SL:The perfect output of my problem solution is designing a IOT based wearable gadget with pressure sensor,to monitor children from attackers and thief

8.CHANNELS or BEHAVIOR `CH`

8.1ONLINE
What kind of actions do customers take online?
Extract online channels from #7

CH:
A quick response to queries

4. EMOTIONS: BEFORE / AFTER `EM`
How do customers feel when they face a problem or a job and afterwards?
i.e. lost, insecure > confident, in control - use it in your communication strategy & design.

EM:BEFORE:Insecure
AFTER:feeling secured ,happy

8.2OFFLINE
What kind of actions do customers take offline? Extract offline channels from #7 and use them for customer development.

They have to take risk

8

4. Requirement analysis

4.1 Functional requirements

FR No.	Functional Requirement (Epic)	Sub Requirement (Story / Sub-Task)
FR-1	User Registration	Registration through Form Registration through Gmail
FR-2	User Confirmation	Confirmation via Email Confirmation via OTP
FR-3	Notification	Notification Via Mobile App and normal Message
FR-4	Monitoring	App to monitor the child location
FR-5	Health monitoring	Heart beat rate , Temperature

4.2 Non-Functional requirements:

FR No.	Non-Func onal Requirement	Descrip on
NFR -1	**Usability**	This model has GSM that can help to notify the parents in case of emergency or the smart band not connected
NFR -2	**Security**	Parents can feel secure because if the child forget or not connect the band it

		will notify the parents and if panic button is pressed it will send alert messageand parents able to track the location
NFR -3	**Reliability**	• Easy to use ● Portable • Flexible • Cost effective
NFR -4	**Performance**	• Create a Child tracker which helps the parents with continuously monitoring the child's location. • The notification will be sentaccording to the • child's location to their parents or caretakers.
NFR -5	**Availability**	• Track your child even in a crowd • Know the current location
NFR -6	**Scalability**	● This model ensures the safety and tracking of the children. Parents need not worry about their children.

5. PROJECT DESIGN

5.1 Data Flow Diagrams
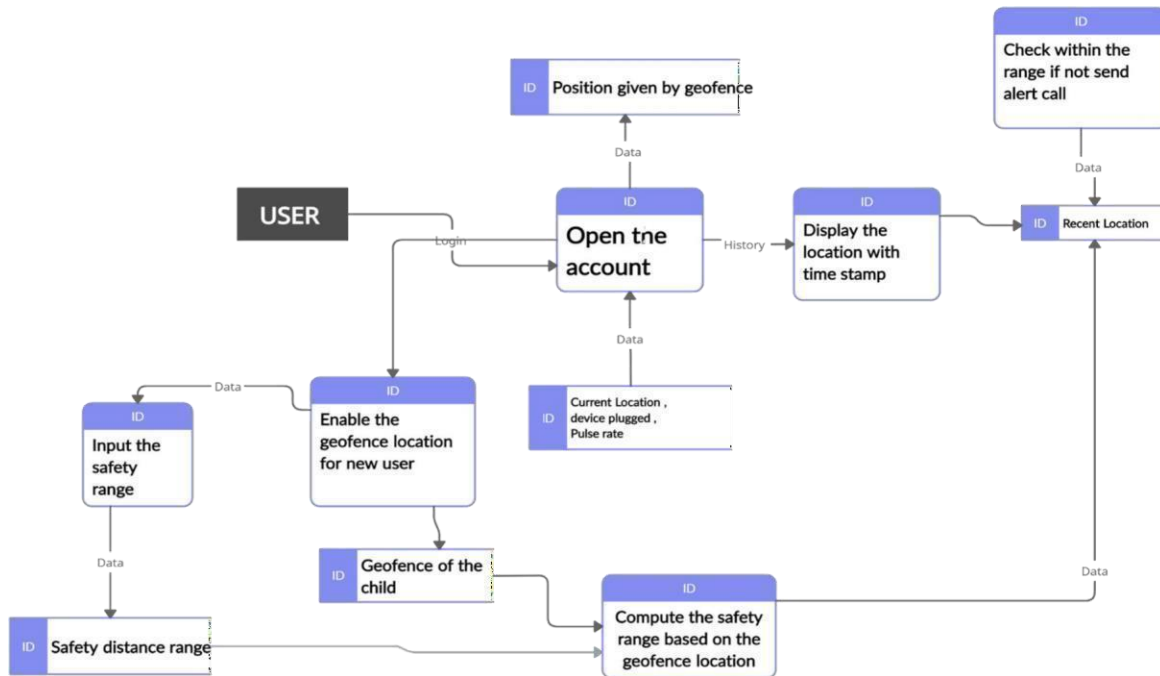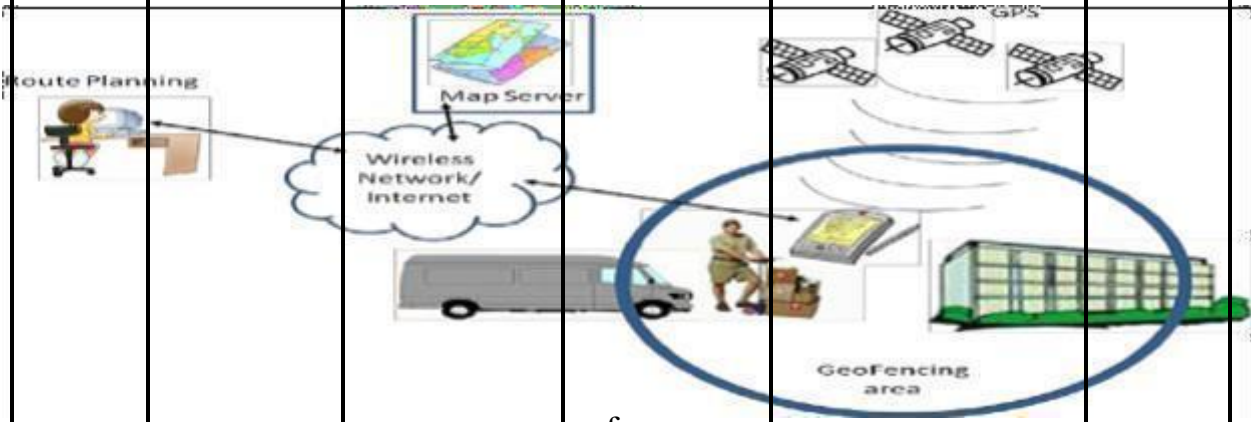
5.2 Solution & Technical Architecture

Solution architecture is a complex process – with many sub-processes – that bridges the gap between business problems and technology solutions. Its goals are to:

- Find the

- est tech solution to solve existing business problems.

- Describe the structure, characteristics, behavior, and other aspects of the software to project stakeholders.

11

- Define features, development phases, and solution requirements.

- Provide specifications according to which the solution is defined, managed, anddelivered.

5.3 User Stories

User Type	Functional Requireme nt (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priorit y	Releas e
Custo m er (Mobil e user)	Registra on	USN-1 (FATHER)	As a user, I can register by entering my email, and password, and confirming my password. I can access the loca on of my	I can access my account/dashboar and receive confirma on email & click confirm	High	Sprint-1

			children using the creden als provided as a Father.			
		USN-2 (MOTHER)	As a user, I can register by entering my email, and password, and confirming my password. I can access the loca on of my children using the creden als provided as a Mother.	I can access my account/dashboar and receive confirma on email & click confirm	High	Sprint-1

		USN-3 (GUARDIAN/ CARETAKER)	As a user, I can monitor the children's ac vi es using a safety gadget monitoring system.	I can access my account/dashboard and receive a confirmation email & click confirm	Mediu m	Sprint-1
	Login	USN-4	As a user, can log into the applica on by entering my email & password.	I can access my account/dashboard.	Mediu m	Sprint-2
	Dashboard	USN-5	As a user, I can fix the geofence for my child's loca on so	I can monitor th current loca on o my child.	High	Sprint-2

			that I will receive alerts if my child crosses the geo-fence and monitor the child's pulse and check whether the device is plugged in or not.			

6. PROJECT PLANNING & SCHEDULING

6.1 Sprint planning and estimation

Sprint	Functional Requirement (Epic)	User Story Number	User Story / Task	Story Points	Priority	Team Members
Sprint-1	Registration	USN-1	As a Parent/Guardian,I can register for the application by entering my email, password. and confirming my password.	2	High	Athitiya KA
Sprint-1		USN-2	As a Parent/ Guardian, I can register for the application through Gmail	1	Medium	Dharani S
Sprint-1	User Confirmation	USN-3	As a parent I will receive connection , location in sms / email once I have entered this	1	High	Arun kumar K

			application			
Sprint-1	Login	USN-4	As a parent/ guardian , I can log into the application by entering email and password.	2	High	Dinesh kumar CS

6.2 Sprint delivery schedule

Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed on Planned End Date)	Sprint Release Date (Actual)
Sprint-1	20	4 Days	24 Oct 2022	29 Oct 2022	20	29 Oct 2022
Sprint-2	20	5 Days	28 Oct 2022	05 Nov 2022	20	04 Nov 2022

Sprint -	20	8 Days	02 Nov 2022	12 Nov 2022	20	11 Nov 2022

3						
Sprint - 4	20	9 Days	10 Nov 2022	19 Nov 2022	20	19 Nov 2022

7. CODING & SOLUTIONING (Explain the features added in the project along with code)

7.1 Feature 1 :

(Adding Geofence)

- Geofence is like a round wall covering the given location. So parents canuse them to mark the location where their children are going .

- Multiple Geofence can be added.

CODING:

```
package
com.example.geofence; import
android.app.PendingIntent; import
android.content.Context; import
android.content.ContextWrapper;
import android.content.Intent;
import android.widget.Toast;

        import
com.google.android.gms.common.api.ApiException; import
com.google.android.gms.location.Geofence; import
com.google.android.gms.location.GeofenceStatusCodes;
import com.google.android.gms.location.GeofencingRequest;
import com.google.android.gms.maps.model.LatLng; public
class GeofenceHelper extends ContextWrapper {

        private static final String TAG = "GeofenceHelper";
        PendingIntent pendingIntent;

        public GeofenceHelper(Context base)  {super(base);
        }
```

```java
        public GeofencingRequest getGeofencingRequest(Geofence
geofence) { return new GeofencingRequest.Builder()
.addGeofence(geofence)

        .setInitialTrigger(GeofencingRequest.INITIAL_TRIGGER_ENTER)
            .build();
    }

        public Geofence getGeofence(String ID, LatLng latLng, float
radius, int transitionTypes) {
        return new Geofence.Builder()
            .setCircularRegion(latLng.latitude, latLng.longitude, radius)
            .setRequestId(ID)
.setTransitionTypes(transitionTypes)
            .setLoiteringDelay(5000)
            .setExpirationDuration(Geofence.NEVER_EXPIRE)
            .build();
    }

    public PendingIntent getPendingIntent() {if
      (pendingIntent != null) {
        return pendingIntent;
      }
      Intent intent = new Intent(this,
    GeofenceBroadcastReceiver.class);
      pendingIntent = PendingIntent.getBroadcast(this, 2607, intent,
```

```java
            PendingIntent.FLAG_IMMUTABLE);

        return pendingIntent;
    }

    public String getErrorString(Exception e) {if
        (e instanceof ApiException) {
            ApiException apiException = (ApiException) e;
            switch (apiException.getStatusCode()) {
                case GeofenceStatusCodes
                    .GEOFENCE_NOT_AVAILABLE:
                return "GEOFENCE_NOT_AVAILABLE";
            case GeofenceStatusCodes
                    .GEOFENCE_TOO_MANY_GEOFENCES:
                return  "GEOFENCE_TOO_MANY_GEOFENCES";
                    case GeofenceStatusCodes
                    .GEOFENCE_TOO_MANY_PENDING_INTENTS:
                        return  "GEOFENCE_TOO_MANY_PENDING_INTENTS";
            }
        }
        return e.getLocalizedMessage();
```

7.2   Feature 2 (Alert Notification)

- Once geofence is added , when the child enters the geofence a notification willbe sent

- When the child leaves the geofence a notification will be sent .

package com.example.geofence; import android.content.BroadcastReceiver; import android.content.Context; import android.content.Intent; import android.location.Location; import android.os.CountDownTimer; import android.util.Log; import android.widget.Toast; import com.google.android.gms.location.Geofence;import com.google.android.gms.location.GeofencingEvent import java.util.List; import android.os.Handler;

public class GeofenceBroadcastReceiver extends BroadcastReceiver {private

static final String *TAG* = "GeofenceBroadcastReceiv";

@Override

public void onReceive(Context context, Intent intent) {

// *TODO: This method is called when the BroadcastReceiver is receiving*

// an Intent broadcast

//.

/*Toast.makeText(context, "GEOFENCE_ENTERED",

Toast.LENGTH_SHORT).show();

final Toast mToastToShow;

```java
        int toastDurationInMilliSeconds = 1200000; mToastToShow
= Toast.makeText(context, "GEOFENCE_EXITED",
        Toast.LENGTH_LONG);
        // Set the countdown to display the toast
        CountDownTimer toastCountDown;
        toastCountDown = new
        CountDownTimer(toastDurationInMilliSeconds, 100000) {public
            void onTick(long
millisUntilFinished) {                mToastToShow.show();
}

                public void onFinish() {
                    mToastToShow.cancel();
                }
            };
        // Show the toast and starts the countdown
        mToastToShow.show();
        toastCountDown.start();*/
         NotificationHelper notificationHelper = new NotificationHelper(context);
notificationHelper.sendHighPriorityNotification("GEOFENCE_TRANSITION_ENT
ER",
        "", MapsActivity.class); GeofencingEvent

    geofencingEvent =
```

```java
        GeofencingEvent.fromIntent(intent);

        if (geofencingEvent.hasError())
        Log.d(TAG, "onReceive: Error receiving geofence event...");
            return;

        }

        List<Geofence> geofenceList
=
geofencingEvent.getTriggeringGeofences();
        for (Geofence geofence:
geofenceList) {

            Log.d(TAG, "onReceive: " + geofence.getRequestId());

        }
    //      Location location = geofencingEvent.getTriggeringLocation();int
        transitionType = geofencingEvent.getGeofenceTransition();

        switch (transitionType) {

        case
Geofence.GEOFENCE_TRANSITION_ENTER:

            notificationHelper.sendHighPriorityNotification("Entered the
    Location", "", MapsActivity.class);
            break;

        case    Geofence.GEOFENCE_TRANSITION_EXIT:
```

notificationHelper.sendHighPriorityNotification("Exited the Location ", "",

MapsActivity.class);

break;

}

}

}

8. TESTING

8.1 Test Cases

Test case ID	Feature Type	Compon ent	Test Scenario	Pre-Requisite	Steps To Execute	Test Data	Expected Result	Actual Result	Stat us	Comments	TC for Automation(Y/N)	BUG ID	Executed By
LoginPage_TC_0 01	Functional	Home Page	Verify user is able to see the Login/Signup popup when user clicked on App		1.Enter App 3.Verify login/Signup popup displayed or not		Login/Signup popup should display	Working as expected	Pass		Y		SnehaShri , Swetha
LoginPage_TC_0 02	UI	Home Page	Verify the UI elements in Login/Signup popup		1.Enter App 2.Verify login/Signup popup with below UI elements: a.email text box b.password text box c.Login button d.New customer? Register		Application should show below UI elements: a.email text box b.password text box c.Login button with orange colour d.New customer? Register	Working as expected	Pass		Y		Shanmegapriya , Shwetha
LoginPage_TC_0 03	Functional	Home page	Verify user is able to log into application with Valid credentials		1.Enter App 2.Enter Valid username/email in Email text box 3.Enter valid password in password text box 4.Click on login button	Username: abcd@gmail.com password: Testing123	User should navigate to user account homepage	Working as expected	Pass		Y		Shakthi
LoginPage_TC_0 04	Functional	Login page	Verify user is able to log into application with InValid credentials		1.Enter App 2.Enter InValid username/email in Email text box 3.Enter valid password in password text box 4.Click on login button	Username: abcd@gmail password: Testing123	Application should show "Login error. There is no user record corresponding to the identifier"	Working as expected	pass		Y		Shakthi , Shanmugapriya
LoginPage_TC_0 04	Functional	Login page	Verify user is able to log into application with Valid credentials		1.Enter App 2.Enter Valid username/email in Email text box 3.Enter invalid password in password text box 4.Click on login button	Username: cacf9ec020@rsirsmtsp.ed u.in password: Testing123678585786875 875	Application should show "the Password is invalid "	Working as expected	Pass		Y		Shwetha B, SnehaShri
LoginPage_TC_0 05	Functional	Login page	Verify user is able to log into application with InValid credentials		1.Enter App 2.Enter InValid username/email in Email text box 3.Enter invalid password in password text box 4.Click on login button	Username: abcd password: Testing123678585786875 875	Application should show "Login error. There is no user record corresponding to the identifier"	Working as expected	Pass		Y		Swetha
Dashboard	Functional	Dashboard	Adding geofence in the location need		1.Enter App 2.Enter the valid username and password		Application show a red circle around the location	Working as expected	Pass		Y		Sneha Shri
Alert Notification	Functional	Notification	Notification when the user entered the geofence		1.Enter App 2.Enter the valid username and password 3.Add the Geofence		Application sent the notification " Entered the location"	Working as expected	Pass		Y		Shanmugapriya , Shwetha
Alert Notification	Functional	Notification	Notification when the user exited the geofence		1.Enter App 2.Enter the valid username and password		Application sent the notification " Exited the location"	Working as expected	Pass		Y		Shakthi , Swetha

8.2 User Acceptance Testing

1 **.**Defect Analysis

25

Resolution	Severity 1	Severiy 2	Severity 3	Severity 4	Subtotal
By Design	11	4	2	2	19
Duplicate	1	1	2	0	4
External	2	3	0	1	6
Fixed	10	2	3	20	35
Not Reproduced	0	0	2	0	2
Skipped	0	0	2	1	3
Won't Fix	0	5	2	1	8
Totals	24	15	13	25	77

2. Test Case Analysis

Sec on	Total Cases	Not Tested	Fail	Pass
Print Engine	5	0	1	4
Client Applica on	47	0	2	45
Security	3	0	0	3

|				
Outsource Shipping	2	0	0	2
Excep on Repor ng	11	0	2	9
Final Report Output	5	0	0	5
Version Control	3	0	1	2

9. RESULTS

1. User Registration :

Users get registered to the app using their mail and create their password. On the user is registered a verification mail will be sent to the user mail id. The user needs to verify the account. All user details are stored in the firebase and verification mail is sent by firebase authentication .
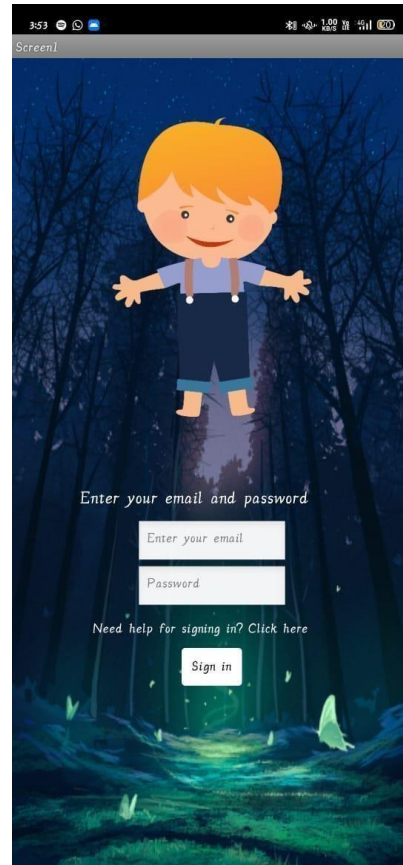
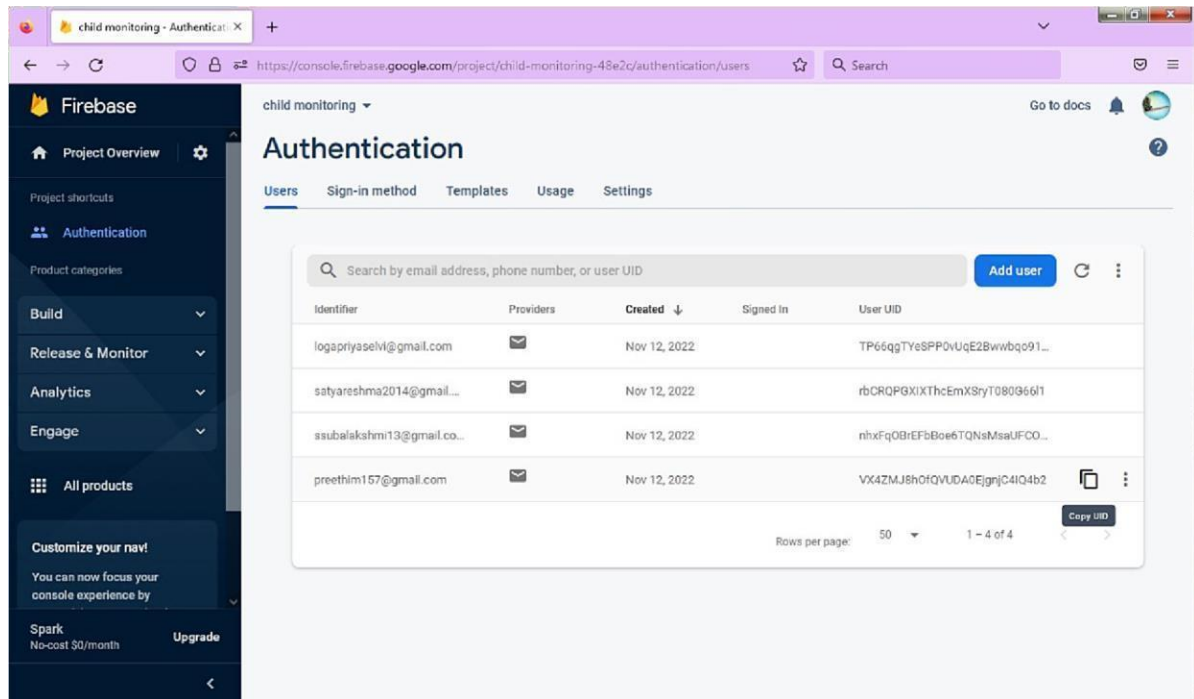**Registration Page :**
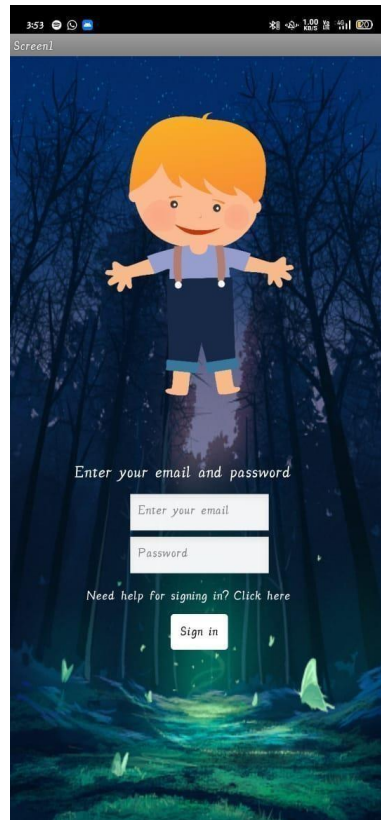
Verification mail
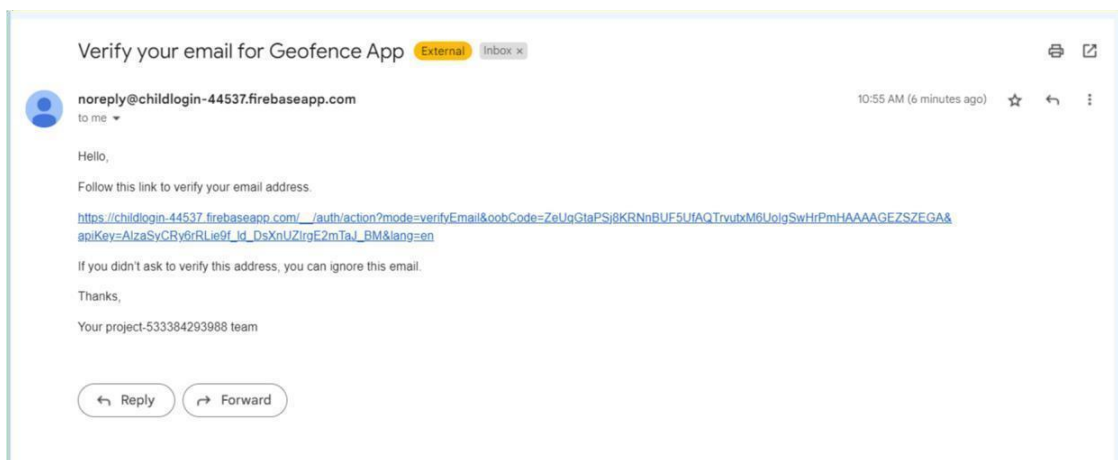
2. User Login

Users with their registered mail and password will login to the account . As the details are stored in firebase, when invalid email or password is entered a message say invalid email or password occur .

Login page :

User Details

3. Adding Geofence and Alert Notification

Users can add geofence in the location where they want to add or where their child is going to play so they can monitor the child location . Once the child enters the geofence alert notification says entered the location will be displayed . When the child leaves the geofence alert notification says exited the location will be displayed.

Geofence
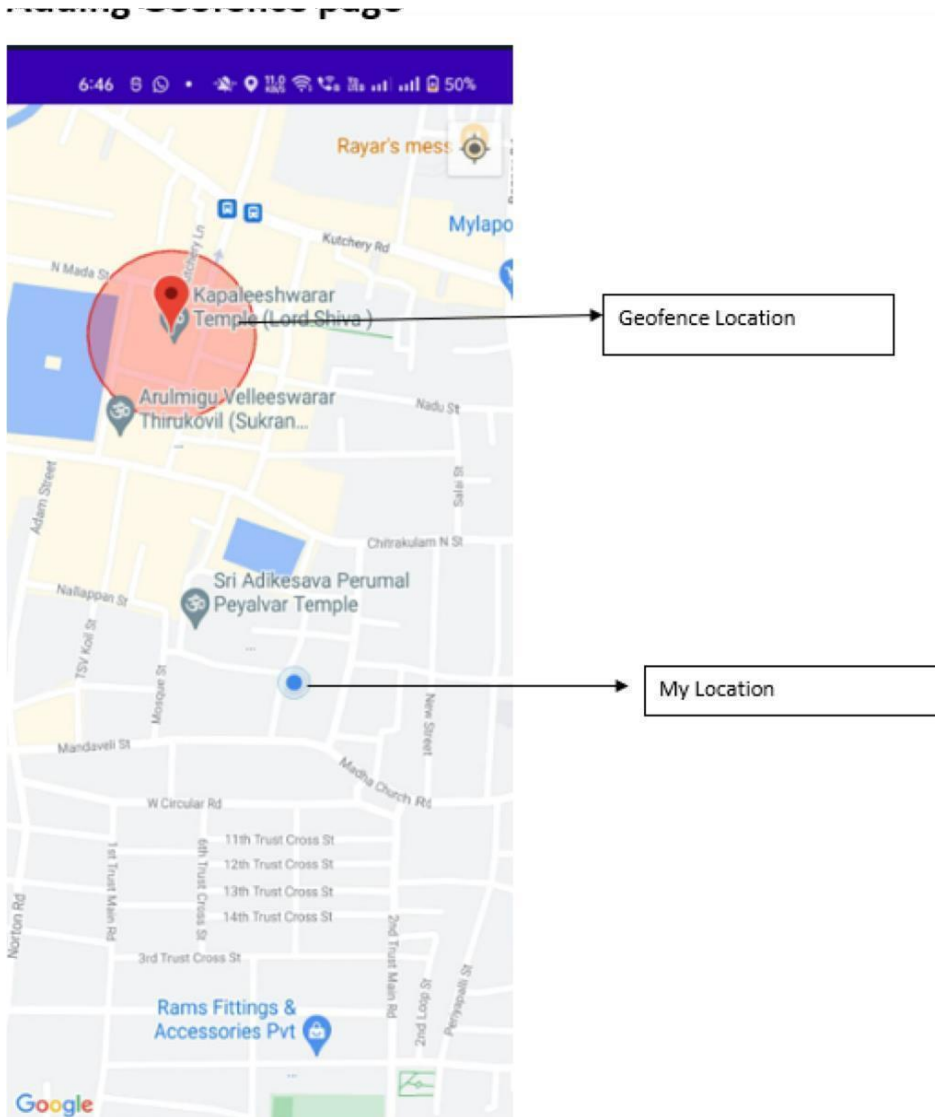
Notification
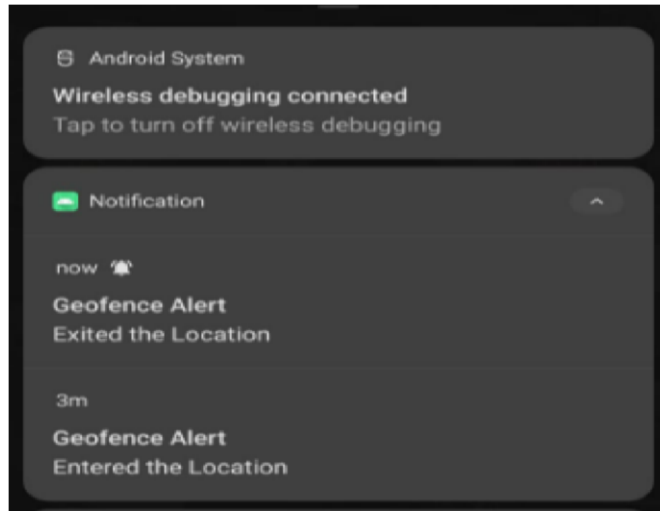
10. Advantages and Disadvantages

The parent can monitor their child from anywhere at any time, and also get a notification when the child goes away from the permitted radius. It also allows the parent to know if their child is in any dangerous situation. The disadvantages of this system are that the child could not produce the exact alert command during a panic condition. The command produced may not match the previously stored command. This project requires manual intervention.

11. Future Scope

In our system, we use the Internet of Things, GPS, GSM, and Raspberry Pi to automatically monitor the youngster in real time. When we utilize a web camera and GPS to actively monitor, this system needs network

connections, satellite communication, and a high-speed data connection. It is challenging to keep an eye out for any network problems or satellite connection problems. Additionally, there is a lag when streaming videos through the server. The Zigbee concept or accessing the system without the internet and employing high-speed server transmission can therefore be used in the future to solve these problems.

12. Conclusion

Future is similar to the word children. Young people are the future pillars of one's nation, as Dr. A.P.J. Abdul Kalam once said, thus it is important to protect today's children's dreams and lives in order to give them a better future. Therefore, every parent should take good care of their own children to prevent them from being victims of abuse that will completely harm them on a physical, mental, and emotional level, wrecking our future. Due to the significance of our future, our product makes it simple for parents to track their kids and regularly visually monitor them, enabling them to assure their safety and lowering the incidence of child abuse.

13. Appendix

GitHub link:
  https://github.com/IBM-EPBL/IBM-Project-4388-1658730974