

SPRINT DELIVERY – 3

TEAM ID : PNT2022TMID29008

**PROJECT NAME: PERSONAL ASSISTANCE FOR SENIORS
WHO ARE SELF RELIANT**

SIMULATION USING ESP32:

The Lcd displays the medicine name when the time arrives.

CODE:

```
#include <WiFi.h> //library for wifi
#include <PubSubClient.h> //library for MQTT
#define LED 1
#include <LiquidCrystal_I2C.h>
LiquidCrystal_I2C lcd(0x27,16,2);
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----
#define ORG " 711i15" //IBM ORGANITION ID
#define DEVICE_TYPE "Iotsensors" //Device type mentioned in ibm watson IOT
Platform
#define DEVICE_ID "12345" //Device ID mentioned in ibm watson IOT Platform
#define TOKEN "Anandh@1973" //Token
String data3,light;
float h, t;
#define BUZZER_PIN 19 // ESP32 GPIO21 pin connected to Buzzer's pin
//----- Customise the above values -----
char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of
event
char subscribetopic[] = "iot-2/cmd/test/fmt/string"; // cmd REPRESENT command
type
char authMethod[] = "use-token-auth"; // authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id
//-----
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient); //calling the
predefinedclient id by passing parameter like server id,portand wificredential
void setup() // configuring the ESP32
{
  Serial.begin(115200);
  Serial.begin(9600);
  // dht.begin();
  pinMode(LED,OUTPUT);
```

```

pinMode(BUZZER_PIN, OUTPUT);
delay(10);
lcd.init();
lcd.clear();
lcd.backlight();
Serial.println();
wificonnect();
mqttconnect();
}
void loop()// Recursive Function
{
    digitalWrite(BUZZER_PIN, HIGH);
    delay(1000);
    if (!client.loop()) {
        mqttconnect();
    }
}
void mqttconnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting client to ");
        Serial.println(server);
        while (!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(500);
        }
        initManagedDevice();
        Serial.println();
    }
}
void wificonnect() //function defination for wificonnect
{
    Serial.println();
    Serial.print("Connecting to ");
    WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish
the connection
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.println("");
    Serial.println("WiFi connected");
    Serial.println("IP address: ");
    Serial.println(WiFi.localIP());
}
void initManagedDevice() {
    if (client.subscribe(subscribetopic)) {
        Serial.println((subscribetopic));
        Serial.println("subscribe to cmd OK");
    }
}

```

```

} else {
  Serial.println("subscribe to cmd FAILED");
}
}


void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic);
  light=(char)payload[0];
  for (int i = 1; i < payloadLength; i++) {
    Serial.print((char)payload[i]);
    data3 += (char)payload[i];
  }
  // Make sure backlight is on
  Serial.println("data: "+ data3);
  if(light=="n")
  {
    digitalWrite(BUZZER_PIN, HIGH);
    Serial.println(data3);
    digitalWrite(LED,HIGH);
    // Print a message on both lines of the LCD.
    lcd.setCursor(2,0); //Set cursor to character 2 on line 0
    lcd.print("Take now");
    lcd.setCursor(2,1); //Move cursor to character 2 on line 1
    lcd.print(data3);
    delay(3000);
    digitalWrite(BUZZER_PIN, LOW);
    digitalWrite(LED,LOW);
    lcd.clear();
  }
  else
  {
    digitalWrite(BUZZER_PIN, LOW);
    Serial.println(data3);
    digitalWrite(LED,LOW);
    lcd.clear();
  }
  data3="";
}

```


NODE RED DASHBOARD:

The person enters the medicine name, date and time. It is stored in cloudant database.

It checks which medicine has to be taken at that time.

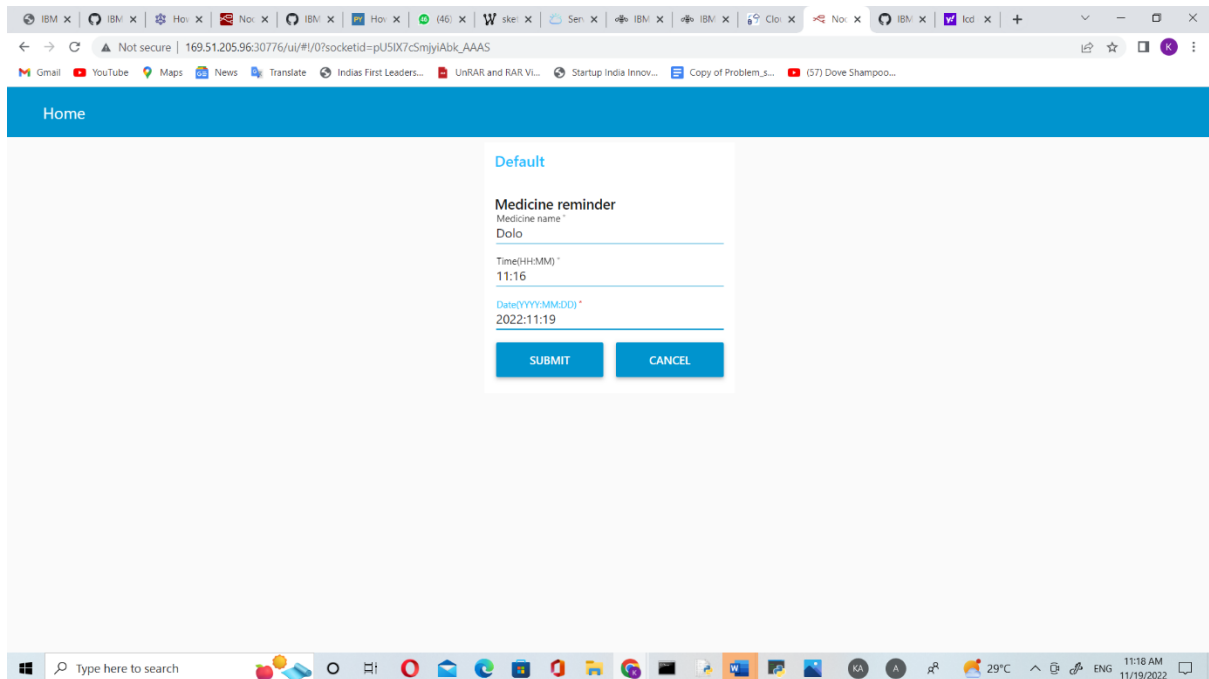

MEDICINE DATABASE:

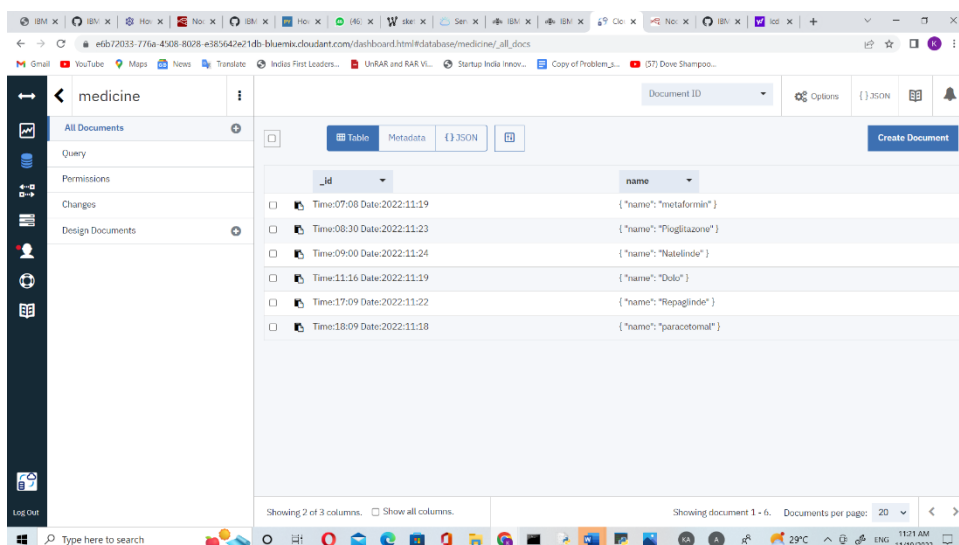

When the medicine details is added it sends command to ibm iot platform.ESP32 displays the medicine name in lcd display.

