

IOT BASED SMART CROP PROTECTION SYSTEMFOR AGRICULTURE

Team ID : PNT2022TMID33619

Team Members:

Sugan.S

Santhosh Kumar.R

Selvaraj.G

Subash.P

INTRODUCTION

PROJECT OVERVIEW:

Crops in farms are many times ravaged by local animals like buffaloes, cows, goats, birds etc. this leads to huge losses for the farmers. It is not possible for farmers to barricade entire fields or stay on field 24 hours and guard it. So here we propose an automatic crop protection system from animals. This is a microcontroller based system using PIC family microcontroller. The microcontroller now sounds an alarm to warn the animal away from the field as well as sends SMS to the farmer so that he may be about the issue and come to the spot in case the animal doesn't turn away by the alarm. This ensures complete safety of crop from animals thus protecting farmers' loss.

PURPOSE:

Our main purpose of the project is to develop an intruder alert to the farm, to avoid losses due to animal and fire. These intruder alerts protect the crop that is damaged, that indirectly increases yield of the crop. The developed system will not be harmful and injurious to animal as well as human beings. The theme of the project is to design an intelligent security system for farm protection by using an embedded system.

LITERATURE SURVEY

EXISTING PROBLEM:

The existing system mainly provide the surveillance functionality. Also these system don't provide protection from wild animals, especially in such an application area. They also need to take actions based on the type of animal that tries to enter the area, as different methods are adopted to prevent different animals from entering restricted areas. The other commonly used method by farmer in order to prevent the crop vandalization by animals include building physical barriers, use of electric fences and manual surveillance and various such exhaustive and dangerous method.

REFERENCES:

- i. Mr.Pranav shitap, Mr.Jayesh redij, Mr.Shikhar Singh, Mr.Durvesh Zagade, Dr. Sharada Chougule. Department of ELECTRONICS AND TELECOMMUNICATION ENGINEERING, Finolex Academy of Management and technology, ratangiri, India.
- ii. N.Penchalaiah, D.Pavithra, B.Bhargavi, D.P.Madhurai, K.EliyasShaik,S.Md.sohaib.Assitant Professor, Department of CSE,AITS, Rajampet,India UG Student, Department of CSE,AITS,Rajampet, India.
- iii. Mr.P.Venkateswara Rao, Mr.Ch Shiva Krishna ,MR M Samba Siva ReddyLBRCE,LBRCE,LBRCE.
- iv. Mohit Korche,Sarthak Tokse, ShubhamShirbhate, Vaibhav Thakre,S. P. Jolhe(HOD). Students , Final Year,Dept.of Electrical engineering,Government

College of engineering,Nagpur head of dept.,Electrical engineering,Government
College of engineering,Nagpur.


PROBLEM STATEMENT DEFINITION STATEMENT:

In the world economy of many Country dependent upon the agriculture.

In spite of economic development agriculture is the backbone of the economy. Crops in farms are many times ravaged by local animals like buffaloes, cows, goats, birds and fire etc. this leads to huge loss for the farmers. It is not possible for farmers to blockade to entire fields or stay 24 hours and guard it. Agriculture meets food requirements of the people and produces several raw materials for industries. But because of animal interference and fire in agricultural lands, there will be huge loss of crops. Crops will be totally getting destroyed.

IDEATION AND PROPOSED SOLUTION

EMPATHY MAP CANVAS:

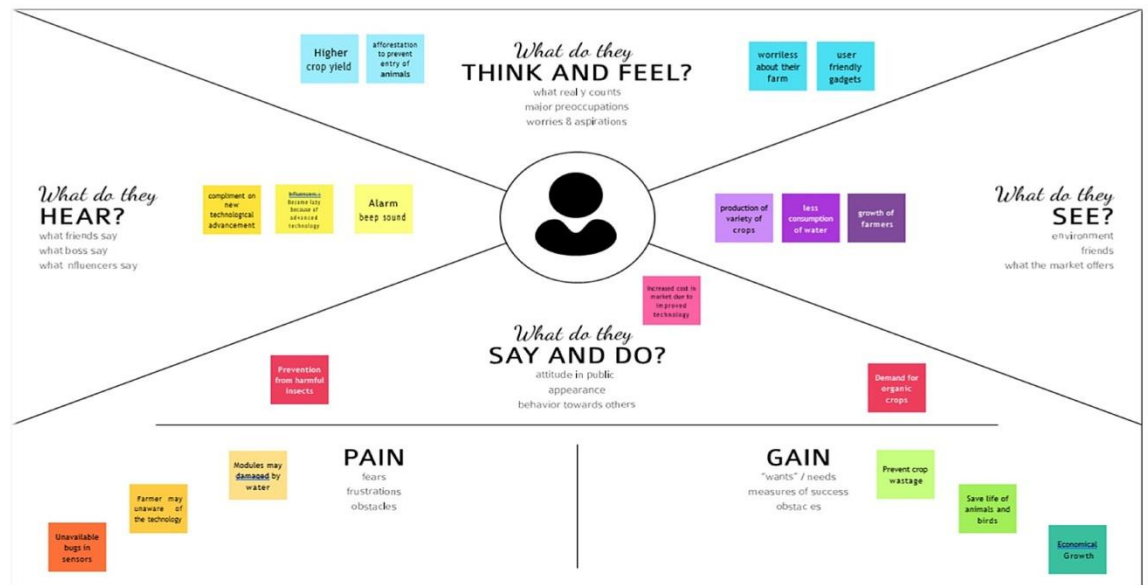

a.

Before you collaborate

A little bit of preparation goes a long way with this session. Here's what you need to do to get going.

10 minutes

- Team gathering**
Define who should participate in the session and send an invite. Share relevant information or pre-work ahead.
- Set the goal**
Think about the problem you'll be focusing on solving in the brainstorming session.
- Learn how to use the facilitation tools**
Use the Facilitation Superpower to run a happy and productive session.

Open article

Define your problem statement

What problem are you trying to solve? Frame your problem as a how might we statement. This will be the focus of your brainstorm.

5 minutes

PROBLEM

An Advanced Smart crop protection system helps the farmers from preventing crops from damage by animals. The setup should be easy to handle in user friendly android based mobile device.

Brainstorm

Write down any ideas that come to mind that address your problem statement.

10 minutes

LINEAR

- Using the tool software can increase productivity
- Alarm can alert farmers
- Setup IoT device for the status and output

PARADIGMATIC

- Integration with the user to get user mobile
- Integrate a device that can be used to monitor app
- python based data to server
- Sending information when needed

LOGICISM

- analyse data from 3-7/7
- ON Technology for the cloud
- Use advanced technology to increase the productivity
- Use language to make user understand
- Make alarm in cloud
- Use language to make user understand

MILLERADIAN

- Setup in water supply can improve agriculture
- Electric device can be avoided
- Device should be feasible
- Using IoT sensors to detect animals

PRAYERNA


- Active IoT helps to connect with devices
- Use camera to monitor the device
- Photocopy can be used to detect animals
- Make a smart system to detect animals

Key rules of brainstorming

- To run an smooth and productive session
- Stay in topic.
- Encourage wild ideas.
- Defer judgment.
- Listen to others.
- Go for volume.
- If possible, be visual.

20 minutes

20 minutes

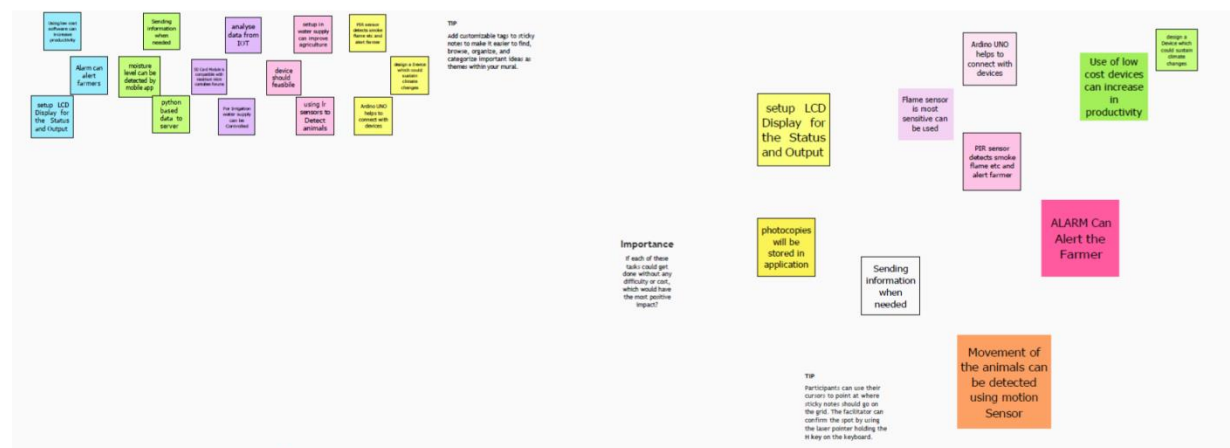

PROPOSED SOLUTION:

| S.NO. | Parameter | Description |
|-------|--|---|
| 1. | Problem Statement. (Problem to be solved) | <ul style="list-style-type: none">✓ Crops are not irrigated properly due to insufficient labour forces.✓ Improper maintenance of crops against various environmental factors such as temperature climate, topography and soil quantity which results in crop destruction.✓ Requires protecting crops from wild animals attacks birds and pests. |
| 2. | Idea /Solution Description. | <ul style="list-style-type: none">✓ Moisture sensor is interfaced with Arduino Microcontroller to measure the moisture level in soil and relay is used to turn ON & OFF the motor pump for managing the excess water level. It will be updated to authorities through IOT.✓ Temperature sensor connected to microcontroller is used to monitor the temperature in the field.✓ Image processing techniques with IOT is followed for crop protection against animal attack. |
| 3. | Novelty / Uniqueness. | ✓ Automatic crop maintenance and protection using embedded and IOT Technology. |
| 4. | Social Impact / Customer satisfaction. | ✓ This proposed system provides many facilities which helps the farmers to maintain the crop field without much loss. |
| 5. | Business Model (Revenue Model). | ✓ This prototype can be developed as product with minimum cost with high performance. |
| 6. | Scalability of the solution | ✓ This can be developed to a scalable product by using solution sensors and transmitting the data through Wireless Sensor Network and Analysing the data in cloud and operation is performed using robots. |

a.

PROBLEM SOLUTION FIT:

| Project Title: IOT Based Smart Crop Protection System for Agriculture | | Project Design Phase: Solution Fit | | Team ID: PNT2022TMD20130 | |
|---|---|---|--|---|--|
| Define CS, fit into CL | 1. CUSTOMER SEGMENT(S) CS <ul style="list-style-type: none"> Farmers who trying to protect crops from various problems | 6. CUSTOMER LIMITATIONS CL <small>EG. BUDGET, DEVICES</small> <ul style="list-style-type: none"> Limited supervision. Limited financial constrains. Lack of manpower. | 5. AVAILABLE SOLUTIONS AS <small>PLUSSES & MINUSES</small> <ul style="list-style-type: none"> Automation in irrigation. CCTV camera to monitor and supervise the crops. Alarm system to give alert while animals attacks the crops. | Explore AS, differentiate | |
| | 2. PROBLEMS / PAINS PR <small>ITS FREQUENCY</small> <ul style="list-style-type: none"> Crops are not irrigated properly. Improper maintenance of crops. Lack of knowledge among farmers in usage of fertilizers and hence crops are affected. Requires protecting crops from Wild animals attacks, birds and pests. | 9. PROBLEM ROOT / CAUSE RC <ul style="list-style-type: none"> Due to insufficient labour forces. Due to various environmental factors such as temperature climate, topography and soil quality which results in crop destruction. Due to high ammonia, urea, potassium and high pH level fertilizers. | 7. BEHAVIOR BE <small>ITS INTENSITY</small> <ul style="list-style-type: none"> Asks suggestions from surrounding peoples and implement there cent technologies. Consumes more time in cropland. Searching for an alternative solution for an existing solution. | Focus on PR, tap into BE, understand RC | |
| Identify strong TR & EM | 3. TRIGGERS TO ACT TR <ul style="list-style-type: none"> By seeing surrounding cropland with installing machineries. Hearing about innovative technologies and effective solutions. | 10. YOUR SOLUTION SL <ul style="list-style-type: none"> Moisture sensor interfaced with Arduino Microcontroller to measure the moisture level in soil and relay issued to turn ON and OFF the motor pump for managing the excess water level. It will be updated to authorities through IOT. Temperature sensor connected to microcontroller is used to monitor the temperature in the field. The optimum temperature required for crop cultivation is maintained using IOT based fertilizing methods are followed to minimize the negative effects on growth of crops while using fertilizers. Image processing techniques with IOT is followed for crop protection against animal attacks. | 8. CHANNELS of BEHAVIOR CH <div>ONLINE</div> <ul style="list-style-type: none"> Using different platforms/social media to describe the working and uses of smart crop protection device. <div>OFFLINE</div> <ul style="list-style-type: none"> Giving awareness among farmers about the application of the device. | Extract online & offline CH of BE | |
| | 4. EMOTIONS EM <small>BEFORE / AFTER</small> <ul style="list-style-type: none"> Mental frustrations due to insufficient production of crops. Felt smart enough to follow the available technologies with minimum cost. | | | | |

REQUIREMENT ANALYSIS

FUNCTIONAL REQUIREMENT:


| S.NO. | Functional Requirement. | Sub Requirement. |
|--------------|--------------------------------|---|
| 1. | User Visibility | Sense animals nearing the crop field & sounds alarm to woo them away as well as sends SMS to farmer using cloud service. |
| 2. | User Reception | The Data like values of Temperature, Humidity, Soil moisture Sensors are received via SMS. |
| 3. | User Understanding | Based on the sensor data value to get the information about the present of farming land. |
| 4. | User Action | The User needs take action like destruction of crop residues, deep plowing, crop rotation, fertilizers, strip cropping, scheduled planting operations. |

NON FUNCTIONAL REQUIREMENT:

| S.NO. | Non-Functional Requirement. | Description. |
|-------|-----------------------------|---|
| 1. | Usability | Mobile Support Users must be able to interact in the same roles & tasks on computers & mobile devices where practical, given mobile capabilities. |
| 2. | Security | Data requires secure access to must register and communicate securely on devices and authorized users of the system who exchange information must be able to do. |
| 3. | Reliability | It has a capacity to recognize the disturbance near the field and doesn't give a false caution signal. |
| 4. | Performance | Must provide acceptable response times to users regardless of the volume of data that is stored and the analytics that occurs in background. Bidirectional, near real-time communications must be supported. This requirement is related to the requirement to support industrial and device protocols at the edge. |
| 5. | Availability | IOT Solutions and domains demand highly available systems for 24 x 7 operations. Isn't a critical production application, which means that operations or production don't go down if the IOT solution is down. |
| 6. | Scalability | System must handle expanding load & data retention needs that are based on the upscaling of the solution scope, such as extra manufacturing facilities and extra buildings. |

PROJECT DESIGN

DATA FLOW DIAGRAM:

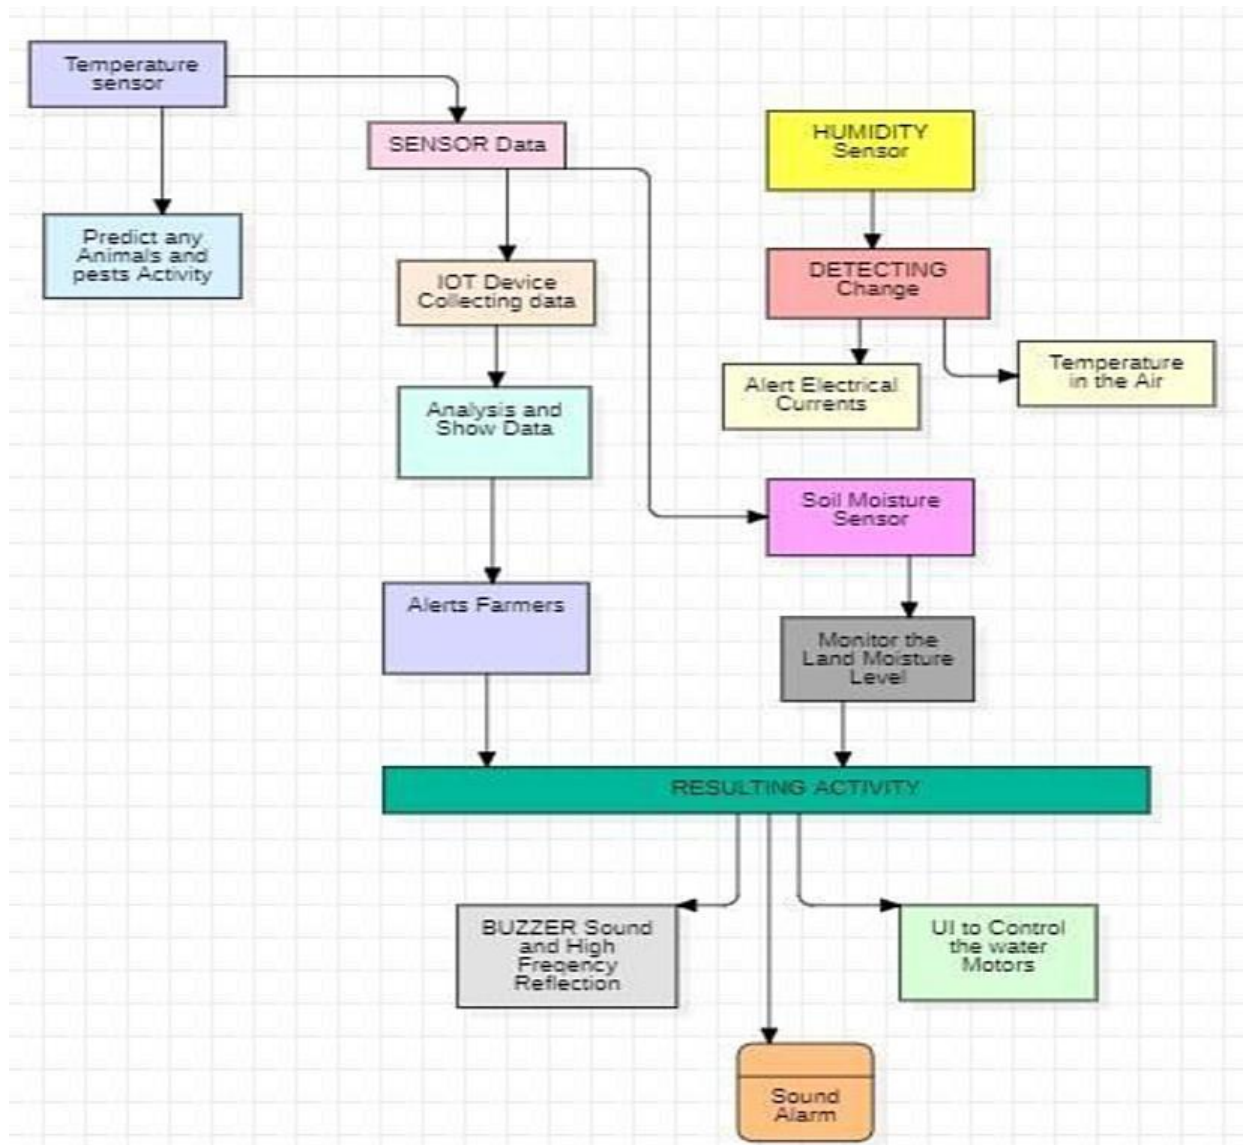

SOLUTION AND TECHNICAL ARCHITECTURE:

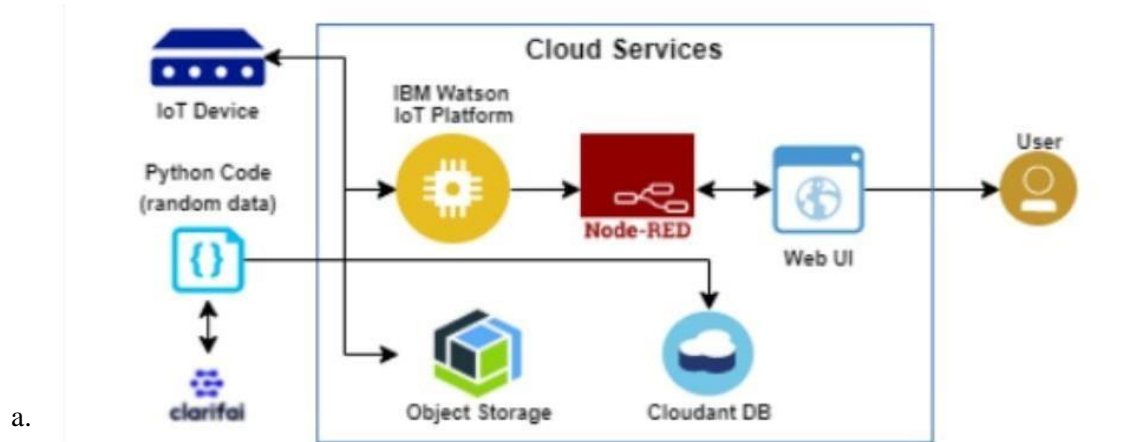


TABLE-1:

| sno | components | description | Technology |
|-----|---------------------|--|---------------------------|
| 1 | User interface | Interacts with iot device | Html,css,angular js etc.. |
| 2 | Application logic-1 | Logic for a process in the application | Python |
| 3 | Application logic-2 | Logic for process in the application | Clarifai |
| 4 | Application logic-3 | Logic for process in the application | IBM Waston Iot platform |
| 5 | Application logic-4 | logic for the process | Node red app service |
| 6 | User friendly | Easily manage the net screen appliance | Web ul |

TABLE-2: APPLICATION AND CHARACTERISTICS

| sno | Characteristics | Description | Technology |
|-----|--------------------------|--|--|
| 1 | Open source framework | Open source framework used | Python |
| 2 | Security implementations | Authentication using encryption | Encryptions |
| 3 | Scalable architecture | The scalability of architecture consists of 3 models | Web UI Application server-python, clarifai Database server-ibm cloud services. |
| 4 | Availability | It is increased by cloudant database | IBM cloud services |

USER STORIES:

| SPRINT | FUNCTIONAL REQUIREMENT | USER STORY NUMBER | USER STORY/TASK | STORY POINTS | PRIORITY |
|---------------|-------------------------------|--------------------------|--|---------------------|-----------------|
| Sprint-1 | | US-1 | Create the IBM Cloud services which are being used in this project. | 7 | high |
| Sprint-1 | | US-2 | Create the IBM Cloud services which are being used in this project. | 7 | high |
| Sprint-2 | | US-3 | IBM Watson IoT platform acts as the mediator to connect the web application to IoT devices, so create the IBM Watson IoT platform. | 5 | medium |
| Sprint-2 | | US-4 | In order to connect the IoT device to the IBM cloud, create a device in the IBM Watson IoT platform and get the device credentials | 6 | high |
| Sprint-3 | | US-1 | Configure the connection security and create API keys that are used in the Node-RED service for accessing the IBM IoT Platform. | 10 | high |
| Sprint-3 | | US-3 | Create a Node-RED service | 8 | high |
| Sprint-3 | | US-2 | Develop a python script to publish random | 6 | medium |

| | | | | | |
|-----------------|--|------|---|---|------|
| | | | sensor data such as temperature, moisture, soil and humidity to the IBM IoT platform | | |
| Sprint-3 | | US-1 | After developing python code, commands are received just print the statements which represent the control of the devices. | 8 | high |
| Sprint-4 | | US-3 | Publish Data to The IBM Cloud | 5 | high |
| Sprint-4 | | US-2 | Create Web UI in Node- Red | 8 | high |
| Sprint-4 | | US-1 | Configure the Node-RED flow to receive data from the IBM IoT platform and also use Cloudant DB nodes to store the received sensor data in the cloudant DB | 6 | high |


SPRINT PLANNING AND ESTIMATION:

| Sprint | Total Story Points | Duration | Sprint Start Date | Sprint End Date (Planned) | Story Points Completed (as on Planned End Date) | Sprint Release Date (Actual) |
|----------|--------------------|----------|-------------------|---------------------------|---|------------------------------|
| Sprint-1 | 20 | 6 Days | 24 Oct 2022 | 29 Oct 2022 | 20 | 29 Oct 2022 |
| Sprint-2 | 20 | 6 Days | 31 Oct 2022 | 05 Nov 2022 | 20 | 05 Nov 2022 |
| Sprint-3 | 20 | 6 Days | 07 Nov 2022 | 12 Nov 2022 | 20 | 12 Nov 2022 |
| Sprint-4 | 20 | 6 Days | 14 Nov 2022 | 19 Nov 2022 | 20 | 19 Nov 2022 |

Velocity:

Imagine we have a 10-day sprint duration, and the velocity of the team is 20 (points per sprint). Let's calculate the team's average velocity in iteration unit (story points per day)

$$AV = \frac{\text{sprint duration}}{\text{velocity}} = \frac{20}{10} = 2$$

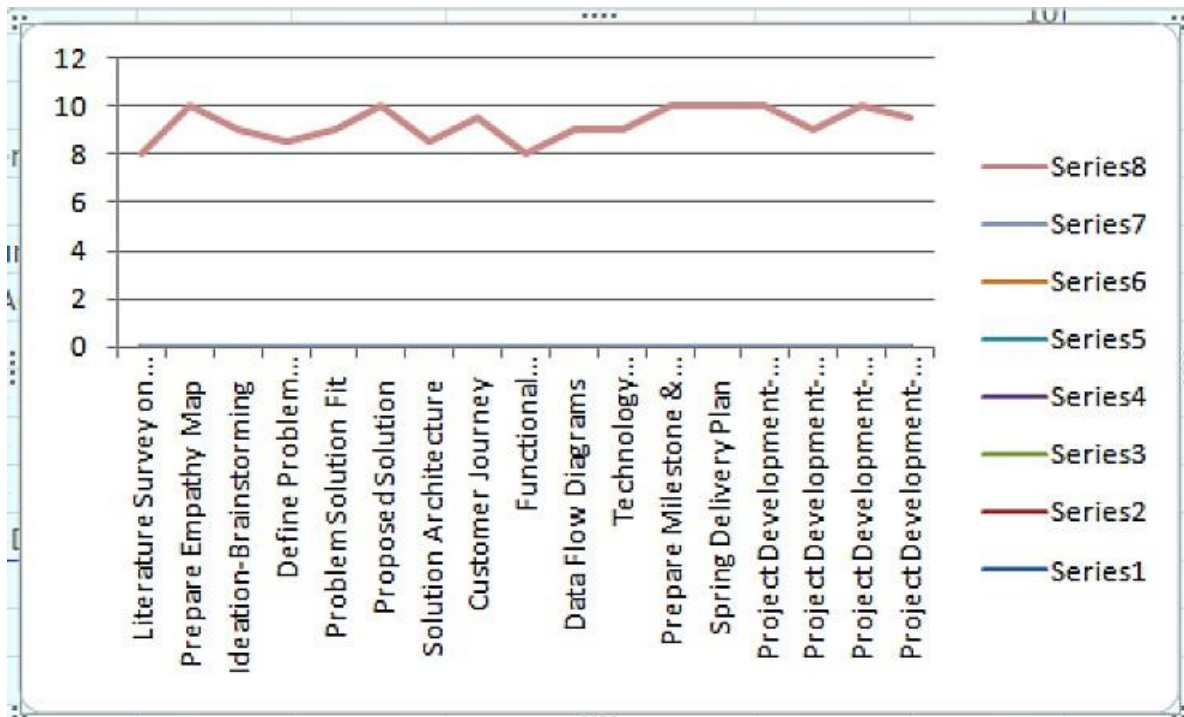

CODING AND SOLUTIONING

FEATURE-1

```
import random
import ibmiotf.application
import ibmiotf.device
from time import sleep
import sys

#IBM Watson Device Credentials.
organization = "op701j"
deviceType = "Lokesh"
deviceId = "Lokesh89"
authMethod = "token"
authToken = "1223334444"

def myCommandCallback(cmd):
    print("Command received: %s" % cmd.data['command'])
    status=cmd.data['command']
    if status=="sprinkler_on":
        print ("sprinkler is ON")
    else :
        print ("sprinkler is OFF")
    #print(cmd)
```

```

try:
    deviceOptions = {"org": organization, "type": deviceType, "id": deviceId, "auth-method": authMethod, "auth-token": authToken}
    deviceCli = ibmiotf.device.Client(deviceOptions)
except Exception as e:
    print("Caught exception connecting device: %s" % str(e))
sys.exit()

#Connecting to IBM watson.
deviceCli.connect()
while True:
    #Getting values from sensors.
    temp_sensor = round( random.uniform(0,80),2)
    PH_sensor = round(random.uniform(1,14),3)
    camera = ["Detected", "Not Detected", "Not Detected", "Not Detected", "Not Detected", "Not Detected",]
    camera_reading = random.choice(camera)
    flame = ["Detected", "Not Detected", "Not Detected", "Not Detected", "Not Detected", "Not Detected",]
    flame_reading = random.choice(flame)
    moist_level = round(random.uniform(0,100),2)
    water_level = round(random.uniform(0,30),2)

    #storing the sensor data to send in json format to cloud.

    temp_data = { 'Temperature' : temp_sensor }
    PH_data = { 'PH Level' : PH_sensor }
    camera_data = { 'Animal attack' : camera_reading}
    flame_data = { 'Flame' : flame_reading }
    moist_data = { 'Moisture Level' : moist_level}
    water_data = { 'Water Level' : water_level}

    # publishing Sensor data to IBM Watson for every 5-10 seconds.
    success = deviceCli.publishEvent("Temperature sensor", "json", temp_data, qos=0)
    sleep(1)
    if success:
        print (" .....publish ok ..... ")
    print ("Published Temperature = %s C" % temp_sensor, "to IBM Watson")

    success = deviceCli.publishEvent("PH sensor", "json", PH_data, qos=0)
    sleep(1)
    if success:
        print ("Published PH Level = %s" % PH_sensor, "to IBM Watson")

    success = deviceCli.publishEvent("camera", "json", camera_data, qos=0)
    sleep(1)
    if success:
        print ("Published Animal attack %s " % camera_reading, "to IBM Watson")
    success = deviceCli.publishEvent("Flame sensor", "json", flame_data, qos=0)
    sleep(1)
    if success:
        print ("Published Flame %s " % flame_reading, "to IBM Watson")

    success = deviceCli.publishEvent("Moisture sensor", "json", moist_data, qos=0)
    sleep(1)
    if success:
        print ("Published Moisture Level = %s " % moist_level, "to IBM Watson")

```



```

success = deviceCli.publishEvent("Water sensor", "json", water_data, qos=0)
sleep(1)
if success:
    print ("Published Water Level = %s cm" % water_level, "to IBM Watson")
print ("")
#Automation to control sprinklers by present temperature an to send alert message to IBM Watson.

if (temp_sensor > 35):
    print("sprinkler-1 is ON")
    success = deviceCli.publishEvent("Alert1", "json", {'alert1': "Temperature(%s) is high, sprinklerlers are turned ON" %temp_sensor },
    , qos=0)
    sleep(1)
    if success:
        print('Published alert1 : ', "Temperature(%s) is high, sprinklerlers are turned ON" %temp_sensor, "to IBM Watson")
    print("")
else:
    print("sprinkler-1 is OFF")
    print("")

#To send alert message if farmer uses the unsafe fertilizer to crops.

if (PH_sensor > 7.5 or PH_sensor < 5.5):
    success = deviceCli.publishEvent("Alert2", "json", {'alert2': "Fertilizer PH level(%s) is not safe,use other fertilizer" %PH_sensor },
    qos=0)
    sleep(1)
    if success:
        print('Published alert2 : ', "Fertilizer PH level(%s) is not safe,use other fertilizer" %PH_sensor, "to IBM Watson")
    print("")

#To send alert message to farmer that animal attack on crops.

if (camera_reading == "Detected"):
    success = deviceCli.publishEvent("Alert3", "json", { 'alert3': "Animal attack on crops detected" }, qos=0)
    sleep(1)
    if success:
        print('Published alert3 : ', "Animal attack on crops detected", "to IBM Watson", "to IBM Watson")
    print("")
#To send alert message if flame detected on crop land and turn ON the splinkers to take immediate action.

if (flame_reading == "Detected"):
    print("sprinkler-2 is ON")
    success = deviceCli.publishEvent("Alert4", "json", { 'alert4': "Flame is detected crops are in danger,sprinklers turned ON" }, qos=0)
    sleep(1)
    if success:
        print('Published alert4 : ', "Flame is detected crops are in danger,sprinklers turned ON", "to IBM Watson")

#To send alert message if Moisture level is LOW and to Turn ON Motor-1 for irrigation.
if (moist_level < 20):
    print("Motor-1 is ON")
    success = deviceCli.publishEvent("Alert5", "json", { 'alert5': "Moisture level(%s) is low, Irrigation started" %moist_level }, qos=0)
    sleep(1)
    if success:
        print('Published alert5 : ', "Moisture level(%s) is low, Irrigation started" %moist_level, "to IBM Watson" )
    print("")
#To send alert message if Water level is HIGH and to Turn ON Motor-2 to take water out.

```

```

if (water_level > 20):
    print("Motor-2 is ON")
    success = deviceCli.publishEvent("Alert6", "json", { 'alert6' : "Water level(%s) is high, so motor is ON to take water out "
%water_level }, qos=0)
    sleep(1)
if success:
    print('Published alert6 : ', "water level(%s) is high, so motor is ON to take water out " %water_level,"to IBM Watson" )
    print("")
#command recived by farmer
deviceCli.commandCallback = myCommandCallback
# Disconnect the device and application from the cloud
deviceCli.disconnect()

```

The screenshot displays the IBM Watson IoT Platform interface. The top navigation bar includes 'Browse', 'Action', 'Device Types', and 'Interfaces'. The left sidebar contains various icons for navigation. The main content area is titled 'Recent Events' and shows a table of live data streams. The table has four columns: 'Event', 'Value', 'Format', and 'Last Received'. The data shows five events: Humidity, Temperature, Moisture, Humidity, and Temperature, each with a JSON value and a timestamp of 'a few seconds ago'. At the bottom right, a status box indicates '1 Simulation running'.

| Event | Value | Format | Last Received |
|-------------|---------------------|--------|-------------------|
| Humidity | {"randomNumber":36} | json | a few seconds ago |
| Temperature | {"Temperature":3} | json | a few seconds ago |
| Moisture | {"Moisture":54} | json | a few seconds ago |
| Humidity | {"randomNumber":70} | json | a few seconds ago |
| Temperature | {"Temperature":68} | json | a few seconds ago |

Items per page 50 | 1-1 of 1 item

1 Simulation running

Features

Output: Digital pulse high (3V) when triggered (motion detected) digital low when idle (no motion detected). Pulse lengths are determined by resistors and capacitors on the PCB and differ from sensor to sensor. Power supply: 5V-12V input voltage for most modules (they have a 3.3V regulator),but 5V is ideal in case the regulator has different specs.

BUZZER

Specifications

- RatedVoltage : 6V DC
- Operating Voltage : 4 to 8V DC

- Rated Current*: $\leq 30\text{mA}$
- SoundOutput at 10cm* : $\geq 85\text{dB}$
- Resonant Frequency : $2300 \pm 300\text{Hz}$
- Tone: Continuous A buzzer is a loud noise maker.

Most modern ones are civil defense or air- raid sirens, tornado sirens, or the sirens on emergency service vehicles such as ambulances, police cars and fire trucks. There are two general types, pneumatic and electronic.

FEATURE-2:

- i. Good sensitivity to Combustible gas in wide range .
- ii. High sensitivity to LPG, Propane and Hydrogen .
- iii. Long life and low cost.
- iv. Simple drive circuit.

TESTING

TEST CASES:

| sno | parameter | Values | Screenshot |
|-----|------------------|--|------------|
| | | | |
| 1 | Model summary | - | |
| 2 | accuracy | Training accuracy- 95% Validation accuracy- 72% | |
| 3 | Confidence score | Class detected- 80% Confidence score-80% | |

User Acceptance Testing:



Downloads

Latest LTS Version: 18.12.1 (includes npm 8.19.2)

Download the Node.js source code or a pre-built installer for your platform, and start developing today.

| LTS Recommended For Most Users | Current Latest Features | |
|--|--|---|
| Windows Installer node-v18.12.1-x64.msi | macOS Installer node-v18.12.1.pkg | Source Code node-v18.12.1.tar.gz |

Windows Installer (.msi)


Windows Binary (.zip)

macOS Installer (.pkg)

macOS Binary (.tar.gz)

Linux Binaries (x64)

| | |
|----------------|--------|
| 32-bit | 64-bit |
| 32-bit | 64-bit |
| 64-bit / ARM64 | |
| 64-bit | ARM64 |
| 64-bit | |

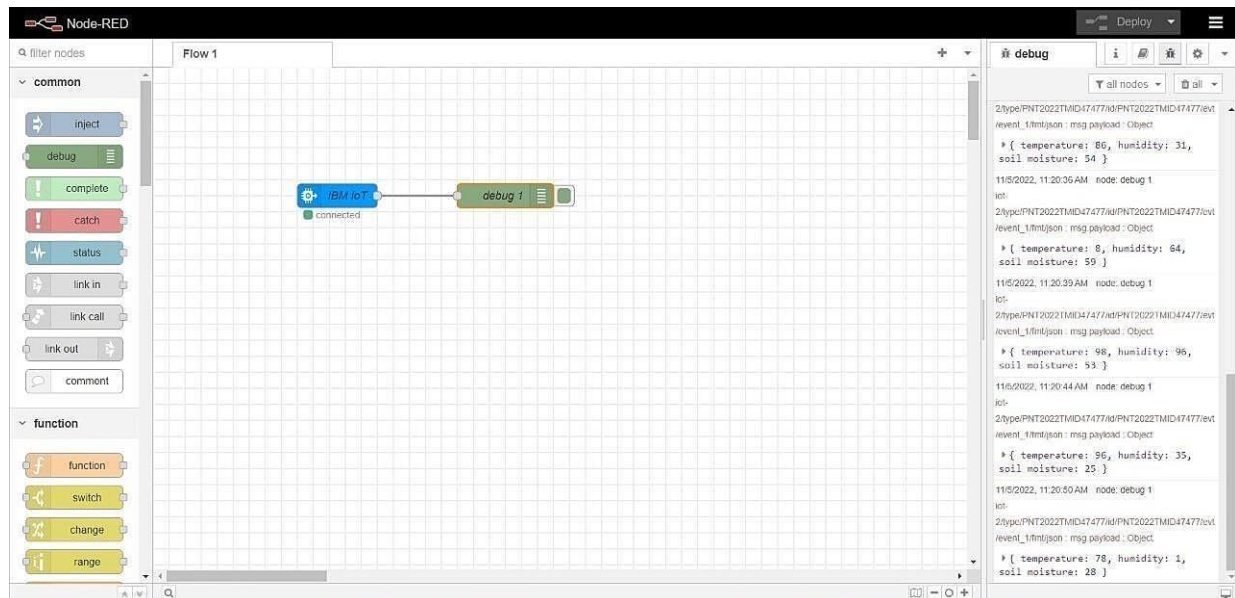

The screenshot displays the Node-RED web interface. On the left, a palette of dashboard widgets is visible. The main workspace shows a flow named 'Flow 1' containing an 'IBM IoT' node (with a 'connected' status) and a 'gauge' node. The 'Edit gauge node' panel is open, showing the following configuration:

- Group:** [CROP] MONITORING
- Size:** auto
- Type:** Gauge
- Label:** TEMPERATURE
- Value format:** {{value}}
- Units:** C
- Range:** min 0, max 100
- Colour gradient:** A gradient bar from green to red.
- Sectors:** 0, optional, optional, 100
- Class:** Optional CSS class name(s) for widget
- Name:** (empty)
- Enabled:** ☐ Enabled

The debug console on the right shows a series of JSON payloads:

```

2/type/PNT2022TMD47477/id/PNT2022TMD47477/ev/
/event_1/mf/json : msg.payload : Object
  { temperature: 28, humidity: 26,
    soil moisture: 75 }
11/5/2022, 11:24:38 AM node debug 1
10:
2/type/PNT2022TMD47477/id/PNT2022TMD47477/ev/
/event_1/mf/json : msg.payload : Object
  { temperature: 2, humidity: 82,
    soil moisture: 53 }
11/5/2022, 11:24:44 AM node debug 1
10:
2/type/PNT2022TMD47477/id/PNT2022TMD47477/ev/
/event_1/mf/json : msg.payload : Object
  { temperature: 48, humidity: 95,
    soil moisture: 82 }
11/5/2022, 11:24:50 AM node debug 1
10:
2/type/PNT2022TMD47477/id/PNT2022TMD47477/ev/
/event_1/mf/json : msg.payload : Object
  { temperature: 33, humidity: 40,
    soil moisture: 90 }
11/5/2022, 11:24:56 AM node debug 1
10:
2/type/PNT2022TMD47477/id/PNT2022TMD47477/ev/
/event_1/mf/json : msg.payload : Object
  { temperature: 43, humidity: 2,
    soil moisture: 86 }

```

```

node-red

4 Nov 18:48:05 - [info] Node-RED version: v3.0.2
4 Nov 18:48:05 - [info] Node.js version: v18.12.0
4 Nov 18:48:05 - [info] Windows_NT 10.0.19044 x64 LE
4 Nov 18:48:26 - [info] Loading palette nodes
4 Nov 18:48:44 - [info] Settings file : C:\Users\ELCOT\.node-red\settings.js
4 Nov 18:48:45 - [info] Context store : 'default' [module-memory]
4 Nov 18:48:45 - [info] User directory : \Users\ELCOT\.node-red
4 Nov 18:48:45 - [warn] Projects disabled : editorTheme.projects.enabled=false
4 Nov 18:48:45 - [info] Flows file : \Users\ELCOT\.node-red\flows.json
4 Nov 18:48:45 - [info] Creating new flow file
4 Nov 18:48:45 - [warn]

-----
Your flow credentials file is encrypted using a system-generated key.

If the system-generated key is lost for any reason, your credentials
file will not be recoverable, you will have to delete it and re-enter
your credentials.

You should set your own key using the 'credentialSecret' option in
your settings file. Node-RED will then re-encrypt your credentials
file using your chosen key the next time you deploy a change.
-----

4 Nov 18:48:45 - [warn] Encrypted credentials not found
4 Nov 18:48:45 - [info] Starting flows
4 Nov 18:48:46 - [info] Started flows
4 Nov 18:48:46 - [info] Server now running at http://127.0.0.1:1880/

```

RESULTS

The problem of crop vandalization by wild animals and fire has become a major social problem in current time.

It requires urgent attention as no effective solution exists till date for this problem. Thus this project carries a great social relevance as it aims to address this problem. This project will help farmers in protecting their orchards and fields and save them from significant financial losses and will save them from the unproductive efforts that they endure for the protection their fields. This will also help them in achieving better crop yields thus leading to their economic wellbeing.

ADVANTAGES AND DISADVANTAGES

Advantage:

Controllable food supply. you might have droughts or floods, but if you are growing the crops and breeding them to be hardier, you have a better chance of not starving. It allows farmers to maximize yields using minimum resources such as water, fertilizers.

Disadvantage:

The main disadvantage is the time it can take to process the information. In order to keep feeding people as the population grows you have to radically change the environment of the planet

CONCLUSION:

A IoT Web Application is built for smart agricultural system using Watson IoT platform, Watsonsimulator, IBM cloud and Node-RED

FUTURE SCOPE

In the future, there will be very large scope, this project can be made based on Image processing in which wild animal and fire can be detected by cameras and if it comes towards farm then system will be directly activated through wireless networks. Wild animals can also be detected by using wireless networks such as laser wireless sensors and by sensing this laser or sensor's security system will be activated.

APPENDIX

SOURCE CODE

```
import time
import sys
import ibmiotf.application
import ibmiotf.device

# Provide your IBM Watson Device Credentials
organization = "8gyz7t" # replace the ORG ID
deviceType = "weather_monitor" # replace the Device type
deviceId = "b827ebd607b5" # replace Device ID
authMethod = "token"
authToken = "LWVpQPpVQ166HWN48f" # Replace the authtoken

def myCommandCallback(cmd): # function for Callback

    if cmd.data['command'] == 'motoron':

        print("MOTOR ON IS RECEIVED")

    elif cmd.data['command'] == 'motoroff':
        print("MOTOR OFF IS RECEIVED")

    if cmd.command == "setInterval":

        else:

    if 'interval' not in cmd.data:

        print("Error - command is missing required information: 'interval'")

    interval = cmd.data['interval']

    elif cmd.command == "print":

        if 'message' not in cmd.data:

            print("Error - command is missing required information: 'message'")
        else:
            output = cmd.data['message']
            print(output)
```

try:

```
        deviceOptions = {"org": organization, "type": deviceType, "id": deviceId, "authmethod":
authMethod,
                        "auth-token": authToken}        deviceCli
= ibmiotf.device.Client(deviceOptions)#
.....
```

exceptException as e:

```
    print("Caught exception connecting device: %s" % str(e))sys.exit()
```

```
    # Connect and send a datapoint "hello" with value "world" into the cloud as an event of type "greeting"
    10 times
deviceCli.connect()
```

while True:

```
    deviceCli.commandCallback = myCommandCallback
```

```
# Disconnect the device and application from the cloud deviceCli.disconnect()
```

SENSOR.PY

```
import time import
sysimport
ibmiotf.application
importibmiotf.device
import random
```

```
# Provide your IBM Watson Device Credentials organization = "8gyz7t" #
replace the ORG ID deviceType = "weather_monitor" #replace the Device
type deviceId = "b827ebd607b5" # replace Device ID authMethod = "token"
authToken = "LWVpQPpVQ166HWN48f" # Replace the authtoken
```

```

def myCommandCallback(cmd):

    print("Command received: %s" % cmd.data['command'])
    print(cmd)

try:
    deviceOptions = {"org": organization, "type": deviceType, "id": deviceId,
"auth-method": authMethod, "auth-token": authToken}
    deviceCli = ibmiotf.device.Client(deviceOptions)
    #.....

except Exception as e:
    print("Caught exception connecting device: %s" % str(e))sys.exit()

# Connect and send a datapoint "hello" with value "world" into the cloud as an event of type "greeting"
# 10 times
deviceCli.connect()

while True:
    temp=random.randint(0,100)
    pulse=random.randint(0,100)
    soil=random.randint(0,100)

    data = { 'temp' : temp, 'pulse': pulse , 'soil':soil}
    #print data
    def myOnPublishCallback():
        print ("Published Temperature = %s C" % temp, "Humidity = %s %" % pulse, "Soil
Moisture = %s %" % soil, "to IBM Watson")

    success = deviceCli.publishEvent("IoTSensor", "json", data, qos=0,
on_publish=myOnPublishCallback)
    if not success:
        print("Not connected to
IoT")time.sleep(1)

```

```
deviceCli.commandCallback = myCommandCallback
```

```
# Disconnect the device and application from the cloud deviceCli.disconnect()
```

Node-RED FLOW :

```
[
{
  "id":"625574ead9839b34",
  "type":"ibmiotout", "z":"630c8601c5ac3295",
  "authentication":"apiKey",
  "apiKey":"ef745d48e395ccc0",
  "outputType":"cmd",
  "deviceId":"b827ebd607b5",
  "deviceType":"weather_monitor",
  "eventCommandType":"data",
  "format":"json",
  "data":"data",
  "qos":0,
  "name":"IBM IoT",
  "service":"registere
d", "x":680,
  "y":220,
  "wires":[]
},
{
  "id":"4cff18c3274cccc4", "type":"ui_button",
  "z":"630c8601c5ac3295",
  "name": "",
  "group":"716e956.00eed6c",
  "order":2,
  "width":0,
  "height":0,
```

```
"passthru":false,
"label":"MotorON",
"tooltip": "",
"color": "",
"bgcolor": "",
"className": "",
"icon": "",
"payload": {"command": "motoron"},
"payloadType": "str",
"topic": "motoron",
"topicType": "s
tr", "x": 360,
"y": 160, "wires": [{"625574ead9839b34"}]},
{
  "id": "659589baceb4e0b0",
  "type": "ui_button", "z": "630c8601c5ac3295",
  "name": "",
  "group": "716e956.00eed6c",
  "order": 3,
  "width": "0",
  "height": "0",
  "passthru": true,
  "label": "MotorOF
F",
  "tooltip": "",
  "color": "",
  "bgcolor": "",
  "className": "",
  "icon": "",
  "payload": {"command": "motoroff"},
  "payloadType": "str",
  "topic": "motoroff",
  "topicType": "s
tr", "x": 350,

"y": 220, "wires": [{"625574ead9839b34"}]},
```

```
{ "id": "ef745d48e395ccc0", "type": "ibmiot",  
  "name": "weather_monitor", "keepalive": "60",  
  "serverName": "",  
  "cleansession": true,  
  "appld": "",  
  "shared": false },  
  
{ "id": "716e956.00eed6c",  
  "type": "ui_group",  
  "name": "Form",  
  "tab": "7e62365e.b7e6b8",  
  "order": 1,  
  "disp": true,  
  "width": "6",  
  "collapse": false },  
  
{ "id": "7e62365e.b7e6b8",  
  "type": "ui_tab",  
  "name": "contorl",  
  "icon": "dashboard",  
  "order": 1,  
  "disabled": false,  
  "hidden": false }  
]
```

```
[  
{  
  "id": "b42b5519fee73ee2", "type": "ibmiotin",  
  "z": "03acb6ae05a0c712",  
  "authentication": "apiKey",  
  "apiKey": "ef745d48e395ccc0",  
  
  "inputType": "evt",  
  "logicalInterface": "",  
  "ruleId": "",  
  "deviceId": "b827ebd607b5",  
  "applicationId": "",  
  "deviceType": "weather_monitor",  

```

```

"eventType":"+",
"commandType": "",
"format": "json",
"name": "IBMIoT",
"service": "registered",
"allDevices": "",
"allApplications": "",
"allDeviceTypes": "",
"allLogicalInterfaces": "",
"allEvents": true,
"allCommands": "",
"allFormats
": "",
"qos": 0,
"x": 270,
"y": 180,
  "wires": [
    [
      "50b13e02170d73fc",
      "d7da6c2f5302ffaf",
      "a949797028158f3f",
      "a71f164bc3 78bcf1"
    ]
  ],
  {
    "id": "50b13e02170d73fc",
    "type": "function",
    "z": "03acb6ae05a0c712",
    "name": "Soil
    Moisture",
    "func": "msg.payload = msg.payload.soil;\nglobal.set('s',msg.payload);\nreturn msg;",
    "outputs": 1,
    "noerr":
    0,
    "initialize
    ": "",
    "finalize": "",
    "libs": [],

    "x": 490,
    "y": 120,
    "wires": [
      [
        "a949797028158f3f",
        "ba98e701f55f04fe"
      ]
    ],
  },

```

```
{
  "id": "d7da6c2f5302ffaf", "type": "function",
  "z": "03acb6ae05a0c712",
  "name": "Humidity",
  "func": "msg.payload = msg.payload.pulse;\nglobal.set('p',msg.payload)\nreturn msg;",
  "outputs": 1,
  "noerr":
0,
  "initialize
": "",
  "finalize": "",

  "l
bs
": [
],
  "x
":
48
0,
  "y": 260, "wires": [[ "a949797028158f3f", "70a5b076eeb80b70" ] ]
},
{
  "id": "a949797028158f3f",
  ,
  "type": "debug",
  "z": "03acb6ae05a0c712",
  , "name": "IBMo/p",
  "active": true,
  "tosidebar": true,
  "console": false,
  "tostatus": false,
  "complete": "payload",
  "targetType": "msg",
  "statusVal": "",
  "statusType": "auto",
  "x": 780,
  "y": 180,
  "wires": [ ]
},
```



```
{
  "id":"70a5b076eeb80b70",
  "type":"ui_gauge",
  "z":"03acb6ae05a0c712",
  "name": "",
  "group":"f4cb8513b95c98a4",
  "order":6,
  "width":0,
  "height":0,
  "gtype":"gage",
  "title":"Humidity",
  "label":"Percentage(%)",
  "format":"{{value}}",
  "min":0,
  "max":100,
  "colors":["#00b500","#e6e600","#ca3838"], "seg1": "",
  "seg2": "",
  "className":
  ":", "x":86
0,
  "y":260,
  "wires":[]
},
{
  "id":"a71f164bc378bcf1", "type":"function",
  "z":"03acb6ae05a0c712",
  "name":"Temperature",
  "func":"msg.payload=msg.payload.temp;\nglobal.set('t',msg.payload);\nreturn msg;", "outputs":1,
  "noerr":
0,
  "initialize":
  ":",
  "finalize": "",
  "i":
  bs
  ":[
],
```

```
"x
":
49
0,
"y":360,

"wires":[["8e8b63b110c5ec2d","a949797028158f3f"]]
},
{
  "id":"8e8b63b110c5ec2d",
  "type":"ui_gauge",
  "z":"03acb6ae05a0c712",
  "name": "",
  "group":"f4cb8513b95c98a4",
  "order":11,
  "width":0,

  "height":0,
  "gtype":"gage",
  "title":"Temperature",
  "label":"DegreeCelcius",
  "format":"{{value}}",
  "min":0,
  "max":"100",
  "colors":["#00b500","#e6e600","#ca3838"],"seg1":"","
  "seg2": "",
  "className
  ":"",
  "x":790,
  "y":360,

  "wires":[]
},
{
  "id":"ba98e701f55f04fe",
  "type":"ui_gauge",
  "z":"03acb6ae05a0c712",
  "name": "",
  "group":"f4cb8513b95c98a4",
  "order":1,
```

```
"width": "0",
"height": "0",
"ctype": "gage",

"title": "Soil Moisture",
"label": "Percentage(%)",
"format": "{{value}}",
"min": 0,
"max": 100,
"colors": ["#00b500", "#e6e600", "#ca3838"], "seg1": "",
"seg2": "",
"className":
":",
"x": 790,
"y": 120,
"wires": []
},
{
  "id": "a259673baf5f0f98",
  "type": "httpin",
  "z": "03acb6ae05a0c712",
  "name": "",
  "url": "/sensor",
  "method": "get",
  "upload": false,
  "swaggerDoc":
  "", "x": 370,
  "y": 500,
  "wires": [{"18a8cdbf7943d27a"}]
},
{
  "id": "18a8cdbf7943d27a", "type": "function",
  "z": "03acb6ae05a0c712",
  "name": "httpfunction",
  "func": "msg.payload(\"pulse\":global.get('p'),\"temp\":global.get('t'),\"soil\":global.get('s'));\nreturn msg;",
```

```
"outputs":1,
"noerr":0,

"initialize":"","
"finalize":"","
"li
bs
":[
],
"x
":
63
0,
"y":500,"wires":[["5c7996d53a445412"]]
},
{
"id":"5c7996d53a445412
",
"type":"httpresponse",
"z":"03acb6ae05a0c712
","name":"","
"statusCode":"","

"header
s":{},
"x":870,
"y":500,

"wires":[]
},
{
"id":"ef745d48e395ccc0",
"type":"ibmiot",
"name":"weather_monitor",
"keepalive":"60",
"serverName":"","
"cleansession":true,
"appld":"","
"shared":false},
{
```

```
"id": "f4cb8513b95c98a4", "type": "ui_group",  
"name": "monitor",  
"tab": "1f4cb829.2fdee8",  
"order": 2,  
"disp":  
true,  
"width":  
"6",
```

```
"collapse": false,  
"className":  
"",  
},  
{  
"id": "1f4cb829.2fdee8",  
"type": "ui_tab",  
"name": "Home",  
"icon": "dashboard",  
"order": 3,  
"disabled": false,  
"hidden": false }
```

GitHub & Project Demo Link

<https://github.com/IBM-EPBL/IBM-Project-16401-1659613469>

