## **Assignment-4**

Assignment Date	20 OCTOBER 2022
Student Name	RAVI TEJA K
Student Roll Number	722819106037
Maximum Marks	2 Marks

## Question-1:

Write code and connections in wowki for ultrasonic sensor.

Whenever distance is less than 100 cms send "alert" to IBM cloud and display in device recent events.

## **Solution:**

WOWKI LINK: https://wokwi.com/projects/346235465961046612

```
#include <WiFi.h>
#include <PubSubClient.h>
#define TRIGGER 2
#define ECHO 15
#define sound_speed 0.034
int distance;

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);

//-----credentials of IBM Accounts-----
#define ORG "wp72r7"
#define DEVICE_TYPE "iot-device-1"
#define DEVICE_ID "123456789"
#define TOKEN "987654321"
```

```
String data3;
//----- Customise the above values ------
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json"; char
subscribetopic[] = "iot-2/cmd/test/fmt/String"; char authMethod[]
= "use-token-auth"; char token[] = TOKEN; char clientId[] = "d:"
ORG ":" DEVICE_TYPE ":" DEVICE_ID;
//----- WiFiClient wifiClient;
PubSubClient client(server, 1883, callback, wifiClient); void setup()
 Serial.begin(115200); pinMode(TRIGGER,
OUTPUT); pinMode(ECHO, INPUT);
 delay(10); Serial.println();
wificonnect();
 mqttconnect();
}
void loop()
{
 digitalWrite(TRIGGER, HIGH);
delayMicroseconds(10); digitalWrite(TRIGGER,
LOW);
 int duration=pulseIn(ECHO,HIGH);
distance=(duration*sound speed)/2;
 Serial.print("Distance:");
 Serial.print(distance);
Serial.println("cms"); if(distance<100){    PublishData(distance);
 }
 delay(1000); if (!client.loop())
```


```
{
mqttconnect();
}
/.....retrieving to Cloud...../
void PublishData(int d) {      mqttconnect();
 String payload = "{\"message\":alert}";
 Serial.print("Sending payload: ");
 Serial.println(payload);
 if (client.publish(publishTopic, (char*) payload.c_str())) {
  Serial.println("Publish ok");
 } else {
  Serial.println("Publish failed");
 }
void mqttconnect() { if (!client.connected())
  Serial.print("Reconnecting client to ");
Serial.println(server);
                        while (!!!client.connect(clientId,
authMethod, token)) { Serial.print(".");
delay(500);
  }
  initManagedDevice();
  Serial.println();
 }
}
```

```
void wificonnect()
 Serial.println();
 Serial.print("Connecting to ");
 WiFi.begin("Wokwi-GUEST", "", 6); while (WiFi.status()
!= WL_CONNECTED) {
delay(500);
Serial.print("."); }
 Serial.println("");
 Serial.println("WiFi connected");
 Serial.println("IP address: ");
 Serial.println(WiFi.localIP());
}
void initManagedDevice() {
 if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic));
  Serial.println("subscribe to cmd OK");
 } else {
  Serial.println("subscribe to cmd FAILED");
}
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
 Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic); for (int i =
0; i < payloadLength; i++) { data3 +=
(char)payload[i];
 }
 Serial.println("data: "+ data3);
```

```
data3="";
}
```

```
WOKWI 🖹 SAVE
                                                                                                                                                                                                                                   Docs
              diagram json libraries.txt Library Manager ▼
                                                                                                                             Simulation
          #include <PubSubClient.h>
#define TRIGGER 2
      4 #define ECHO 15
          #define sound_speed 0.034
          int distance;
          void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
    10
          //----credentials of IBM Accounts----
          #define ORG "wp72r7"
#define DEVICE_TYPE "iot-device-1"
    12
13
14
           #define DEVICE_ID "123456789"
          #define TOKEN "987654321" String data3;
    15
16
                                                                                                                         Connecting to ....
                                                                                                                         WiFi connected
                                                                                                                         IP address:
    18
         //----- Customise the above values
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
    19
                                                                                                                         10.10.0.2
                                                                                                                         Reconnecting client to wp72r7.messaging.internetofthings.ibmcloud.com
                                                                                                                         iot-2/cmd/test/fmt/String
                                                                                                                         subscribe to cmd OK
    23
24
    25
26
                                                                                                                         399 cms.
                                                                                                                         399 cms.
    28
                                                                                                                         399 cms.
    29
           WiFiClient wifiClient;
                                                                                                                         212 cms.
           PubSubClient client(server, 1883, callback ,wifiClient);
    30
                                                                                                                         30 cms.
           void setup()
    31
                                                                                                                         Sending payload: {"message":"alert"}
             Serial.begin(115200);
pinMode(TRIGGER, OUTPUT);
    33
                                                                                                                         Publish ok
                                                                                                                                                                                                                                 pinMode(ECHO, INPUT);
```

## **CIRCUIT DIAGRAM:**

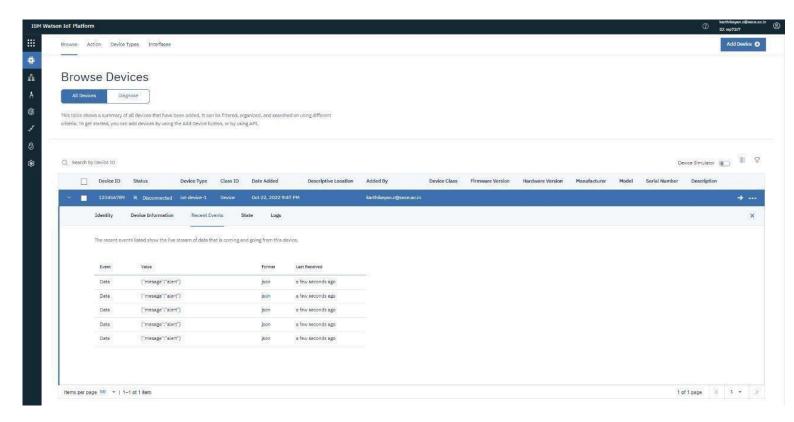

**IBM CLOUD RECENT EVENTS:**