# SMARTFARMER- IOT ENABLED SMART FARMING APPLICATION

# **FINAL REPORT**

**Team ID:** PNT2022TMID19528

Team:

Subahan.K [Team leader]

Mohammad Hassain.K

Sai Kumar. G

Nikhil. K

#### 1. INTRODUCTION

- 1.1 Project Overview
- 1.2 Purpose

### 2. LITERATURE SURVEY

- 2.1 Existing problem
- 2.2 References
- 2.3 Problem Statement Definition

### 3. IDEATION & PROPOSED SOLUTION

- 3.1 Empathy Map Canvas
- 3.2 Ideation & Brainstorming
- 3.3 Proposed Solution
- 3.4 Problem Solution fit

## 4. REQUIREMENT ANALYSIS

4.1 Functional requirement

### 5. PROJECT DESIGN

- 5.1 Data Flow Diagrams
- 5.2 Solution & Technical Architecture

### 6. PROJECT PLANNING & SCHEDULING

6.1 Sprint Planning, Schedule & Estimation

# 7. CODING & SOLUTIONING (Explain the features added in the project along with code)

7.1 Feature

### 8. TESTING

- 8.1 Test Cases
- 8.2 User Acceptance Testing

### 9. RESULTS

9.1 Performance Metrics

# 10. ADVANTAGES & DISADVANTAGES

- 11. CONCLUSION
- 12. FUTURE SCOPE

# 13. APPENDIX


Source Code

GitHub & Project Demo Link

### 1. INTRODUCTION

#### 1.1 PROJECT OVERVIEW

IoT-based agriculture system helps the farmer in monitoring different parameters of his field like soil moisture, Temperature, humidity using some sensors. Farmers can monitor all the sensor parameters by using a web or mobile application even if the farmer is not near his field. Watering the crop is one of the important tasks for the farmers. They can make the decision whether to water the crop or postpone it by monitoring the sensor parameters and controlling the motor pumps from the mobile application itself.

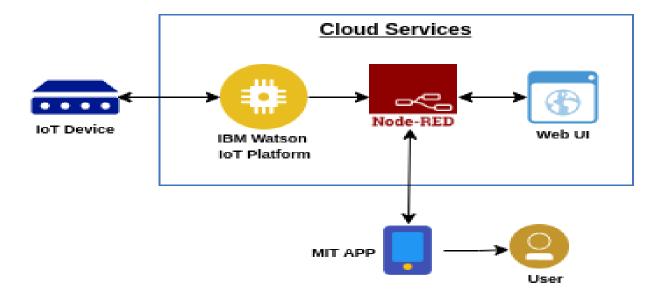

#### 1.2 PURPOSE

The smart agriculture model main aim **to avoid water wastage in the irrigation process**. It is low cost and efficient system Is shown below. It includes NodeMCU, Arduino Nano, sensors like soil moisture and Dht11, solenoid valves, relays

# 2. LITERATURE SURVEY

#### 2.1 EXISTING PROBLEM

The challenges of a smart agriculture system include the integration of these sensors and tying the sensor data to the analytics driving automation and response activities. When integrated, the use of data analytics can reduce the overall cost of agriculture and contribute to higher production from the same amount of area through precise control of water, fertilizer and light. Smart methods allow for farming on smaller and more distributed lands through remote monitoring, whether indoor or outdoor.

To successfully deploy a smart agriculture system, consider setting up a communications network that can integrate a limited number of sensors across a large area of farmland. This will require third-party network provisioning or setting up a private network consisting of access points and uplinks to a private backhaul network, which channels all the data traffic to centralized monitoring software or an analytics head-end system

- It is not a secure system.
- There is no motion detection for protection of agriculture field.
- Automation is not available.

#### 2.2REFERENCES

- [1] ISSN No: -2456-2165 Volume 4, Issue 2 Feb 2019: "Solar's' Energy: A safe and reliable, eco-friendly and sustainable Clean Energy Option for Future India: A Review."
- [2] Universal Paper of advanced science and science and exploration technology. [2] GRD Journals- Global Research and Development Journal for Engineering | Volume 4 | Issue 3 | February (2019) ISSN: 2455-5703 "Design and Implementation of an Advanced Security System for Farm Protection from Wild Animals".


- [3] International Journal of Innovations in Engineering and Science, Impact Factor Value 4.046 e- ISSN: 2456-3463 Vol.4, No. 5, 2019 "Solar Powered Smart Fencing System for Agriculture Protection using GSM & Wireless Camera".
- [4] International Journal of Management, Technology and Engineering ISSN NO: 2249-7455 Volume 8, Issue VII, JULY/2018" Protecting Crops from Birds, Using Sound Technology in Agriculture" [5] American Journal of Engineering Research (AJER)2018 eISSN: 2320-0847 p-ISSN: 2320-0936 Volume-7, Issue-7, pp-326-330 "Moisture Sensing Automatic Plant Watering System Using Arduino Uno".

#### 2.3 PROBLEM STATEMENT DEFINITION

The soil moisture sensor measures wetness content in the soil. The Arduino UNO microcontroller used to receive input from a various sensor and it can be controlled automatically. When soil moisture sensor goes low the water pump will be on and it exceeds defined levels of the water motor will turn off automatically. We can constantly monitor the growth of a crop using ultrasonic sensor. PIR sensor detects the motion or unusual movement in the agricultural land. This device his very helpful to the former to monitor and control environmental parameters at their field. The farmers did not go to their field, they can remotely monitor and control using cloud.

## 3. IDEATION & PROPOSED SOLUTION

#### 3.1 EMPATHY MAP CANVAS

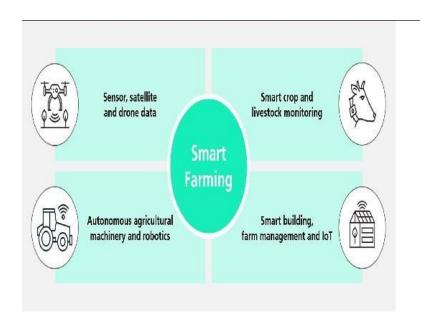

#### 3.2 IDEATION AND BRAINSTORMING

Introduction on Internet of Things (IoT), application of IoT in agricultural field to improve the yield and quality by reducing the cost is provided. The sensors which are used in the architecture are discussed briefly and the process of transmission of data from the agriculture field to the central system is explained. The proposed system advantages are included. In addition, open research issues, challenges, and future of IoT in agricultural field are highlighted. The concept is basically developed on an idea, where there are numerous things or objects - such as Arduino, sensors, GSM models, LCD display, etc., that are connected with the Internet. Each of the objects has a different address and is able to interact with other items. The things or objects co-operate with each other to reach a common goal.

We are going to construct a smart agricultural monitoring system which can collect crucial agricultural data and send it to an IoT platform called Thing speak in real time where the data can be logged and analyzed. The logged data on Thing speak is in graphical format, a botanist or a reasonably knowledge farmer can analyze the data (from anywhere in the world) to makesensible changes in the supplied resources (to crops) to obtain high quality yield.

Smart agriculture monitoring system or simply smart farming is an emerging technology concept where data from several agricultural fields ranging from small to large scale and its surrounding are collected using smart electronic sensors. The collected data are analyzed by experts and local farmers to draw short term and long-term conclusion on weather pattern, soil fertility, current quality of crops, amount of water that will be required for next week to a monthetc.

We can take smart farming a step further by automating several parts of farming, for example smart irrigation and water management. We can apply predictive algorithms on microcontrollers or SoC to calculate the amount of water that will be required today for a particular agriculture field. Say, if there was rain yesterday and the quantity of water required today is going to be less. Similarly, if humidity was high the evaporation of water at upper ground level is going to be less, so water required will be less than normal, thus reducing water usage.

#### 3.3 PROPOSED SOLUTION

| S. No. | Parameter                                   | Description  |  |  |  |  |
|--------|---|--|--|--|--|--|
| 1.     | Problem Statement<br>(Problem to be solved) | To provide efficient decision support system using wireless sensor network which handle different activities of farm and gives useful information related to farm. Information related to Soil moisture, Temperature and Humidity content. Due to the weather condition, water level increasing Farmers get lot of distractions which is not good for Agriculture. |  |  |  |  |
| 2.     | Idea / Solution<br>description              | Smart Agricultural System solutions provide an integrated IoT platform in agriculture that allows farmers to leverage sensors, smart gateways and monitoring systems to collect information, control various parameters on their farms and analyze real-time data in order to make informed decisions.   |  |  |  |  |
| 3.     | Novelty / Uniqueness                        | Various eminent researchers have been making efforts for smart farming by using IoT concepts in agriculture. But, a bouquet of unfolded challenges is still in a queue for their effective solution. This study makes some efforts to discuss past research and open challenges in IoT based agriculture.  |  |  |  |  |

| 4. | Social Impact / Customer<br>Satisfaction | Reduces the wages for labors who work in the agricultural field. It saves a lot of time. IoT can help improve customer relationships by enhancing the customer's overall experience.                       |
|----|--|--|
| 5. | Business Model<br>(Revenue Model)        | A monthly subscription is charged to farmers for prediction<br>and suggesting the irrigation timing based on sensors<br>parameters like temperature, humidity, soil moisture.                              |
| 6. | Scalability of the<br>Solution           | Scalability in smart farming refers to the adaptability of a system to increase the capacity, for example, the number of technology devices such as sensors and actuators, while enabling timely analysis. |

### 3.4 PROBLEM SOLUTION FIT

| 1.Customer segments:-  | 6.Customer constrains:-  | 5. Available solutions :-  |
|--|--|--|
| Types of Customers who are going to this project are  • Large Scale Farmers • Remote Farmers   | The customer needs a solution which will solve the problems in farming when he is in a remote location and that solution should fulfil the following needs.  • Cost efficient  • Low power consumption  • Time efficient | We can give solutions to this<br>problem by using the Smart<br>Farming Application which<br>collects the Moisture level data<br>from the field and operate in<br>the basis of that moisture level. |
| 2. Jobs to be done :-  | 9. Problem route cause:-   | 7. Behavior:-  |
| The Customers want to<br>automate the irrigation<br>process, reduce cost of<br>manual workers and<br>minimize the power<br>consumption   | The route cause for Smart farming Applica  | The customer needs to make a revolutionary change in farming by means of modern technologies.  |
| 3. Triggers:-  | 10. Solution:-   | 8.Channels of behaviour:-  |
| Farmers are facing many problems while farming in traditional manner. This triggers the Smart Farming Applications.  4. Emotions:- Farmers feel very relaxed and feel stressless while working in field. | Our solution for this<br>project is to give<br>environment sustainable<br>Product for the farming in<br>modern era with reduced<br>cost and with best<br>efficiency  | The channels of behavior recombines the ration of the following  Online Offline  |

# 4. REQUIREMENT ANALYSIS

#### 4.1 FUNCTIONAL REQUIREMENT

#### **Functional Requirements:**

Following are the functional requirements of the proposed solution.


| FR No. | Functional Requirement (Epic) | Sub Requirement (Story / Sub-Task)                               |
|--------|-------------------------------|--|
| FR-1   | User Registration             | Registration through Gmail                                       |
| FR-2   | User Confirmation             | Confirmation via Email Confirmation via OTP                      |
| FR-3   | Log in to system              | Check Credentials Check Roles of Access.                         |
| FR-4   | Manage Modules                | Manage System Admins Manage Roles of User Manage User permission |
| FR-5   | Check whether details         | Temperature details Humidity details                             |
| FR-6   | Log out                       | Exit   |


# **5. PROJECT DESIGN**

#### 5.1. DATA FLOW DIAGRAMS

A Data Flow Diagram (DFD) is a traditional visual representation of the information flows within a system. A neat and clear DFD can depict the right amount of the system requirement graphically. It shows how data enters and leaves the system, what changes the information, and where data is stored.


- The different soil parameters temperature, soil moistures and then humidity are sensed using different sensors and obtained value is stored in the IBM cloud.
- Arduino UNO is used as a processing Unit that process the data obtained from the sensors and whether data from the weather API.
- NODE-RED is used as a programming tool to write the hardware, software, and APIs. The MQTT protocol is followed for the communication.
- All the collected data are provided to the user through a mobile application that was developed using the MIT app inventor. The user could plan through an app, weather to water the crop or not depending upon the sensor values. By using the app, they can remotely operate to the motor switch.



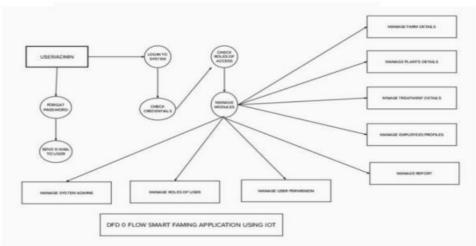

#### 5.2. SOLUTION AND TECHNICAL ARCHITECTURE

- I. The proposed system is based on the smart irrigation/ plant cultivation incorporating the IOT technology for the use of the farmer to get the lively updates about the farm.
- II. The idea is to collect the information of the plant using sensors and that data us given to Arduino from that the data is given to the cloud and it can be viewed using the Application.
- The different soil parameters temperature, soil moistures and then humidity are sensed using different sensors and obtained value is stored in the IBM cloud.
- Arduino UNO is used as a processing Unit that process the data obtained from the sensors and whether data from the weather API.
- NODE-RED is used as a programming tool to write the hardware, software, and APIs. The MQTT protocol is followed for the communication.
- All the collected data are provided to the user through a mobile application that was developed using the MIT app inventor. The user could decide through an app, weather to water the crop or not depending upon the sensor values. By using the app, they can remotely operate the motor switch

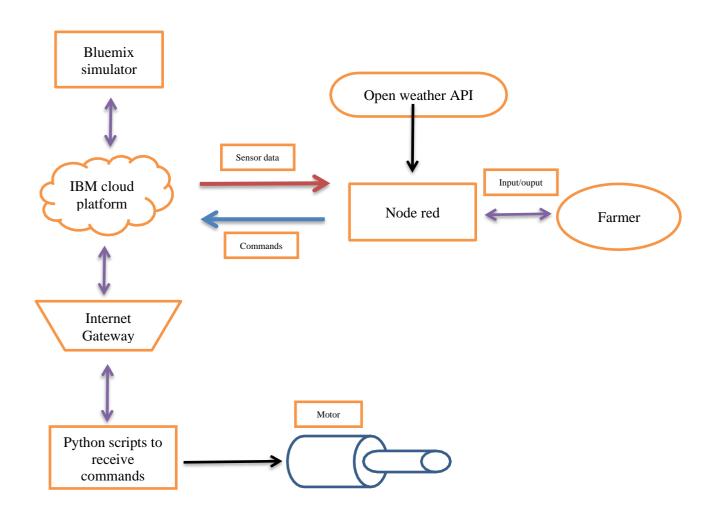

# 6. PROJECT PLANNING AND SHEDULING

|          | Functional requireme ntnet | User<br>story<br>Number |   | Points |      | Team<br>members                              |
|----------|----------------------------|-------------------------|---|--------|------|--|
| Sprint 1 | Simulation creation        | USN 1                   | Connection of sensors to the Arduino board using the python code.                           | 2      | High | Subahan<br>Md Hassain<br>Sai Kumar<br>Nikhil |
| Sprint 2 | Software                   | USN 2                   | Creating devices in the IBM Watson IOT platform, workflow for IOT scenarios using node red. | 2      | High | Subahan<br>Md Hassain<br>Sai Kumar<br>Nikhil |
| Sprint 3 | MIT app<br>Inventor        | USN 3                   | Developing an application for the farmer using MIT app inventor                             | 2      | High | Subahan<br>Md Hassain<br>Sai Kumar<br>Nikhil |

| Sprint   |          |       | User story/task            |   | Priority | Team       |
|----------|----------|-------|----------------------------|---|----------|------------|
|          |          |       |                            |   |          | members    |
| Sprint 3 | Dashboar | USN 3 | Designing the modules      | 2 | High     | Subahan    |
|          | dd       |       | and testing the            |   |          | Md Hassain |
|          |          |       | applications               |   |          | Sai Kumar  |
|          |          |       |                            |   |          | Nikhil     |
| Sprint 4 | Web UI   | USN 4 | To make the user to        | 2 | High     | Subahan    |
|          |          |       | interact with the software |   |          | Md Hassain |
|          |          |       |                            |   |          | Sai Kumar  |
|          |          |       |                            |   |          | Nikhil     |

# 7. CODING AND SOLUTIONING

#### 7.2.FEATURE


```
import wiotp.sdk.
deviceimport time
import os
import datetime
import random
myConfig = {
  "identity": {
     "orgId": "0hzydu",
     "typeId": "NodeMCU",
      "deviceId": "12345"
  "auth": {
    "token": "12345678"
client = wiotp.sdk. device. Device Client (config=myConfig,
logHandlers=None)client. Connect ()
def myCommandCallback (cmd):
  print ("Message received from IBM IoT Platform: %s"
  %cmd.data['command'])m=cmd.data['command']
  if (m=="motoron"): print
    ("Motor is switchedon")
  elif (m=="motor off"):
     print ("Motor is switched
  OFF")print (" ")
while True:
  moist =random. randint (0,100)
```


```
temp=random. randint (-20, 125)
hum=random. randint (0, 100) myData= {'moisture': moist,'temperature': temp,'humidity': hum} client. publish Event (eventide="status", msgFormat="json", data=myData, qos=0, onPublish=None)
print ("Published data Successfully: %s", myData)time. sleep (2)
client.commandCallback =myCommandCallback
client.disconnect ()
```

# 8.TESTING


#### 8.1.TEST CASE

Web application using Node Red

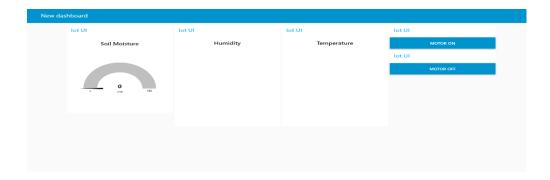


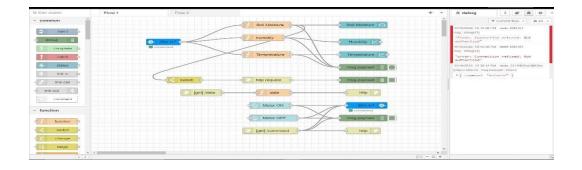



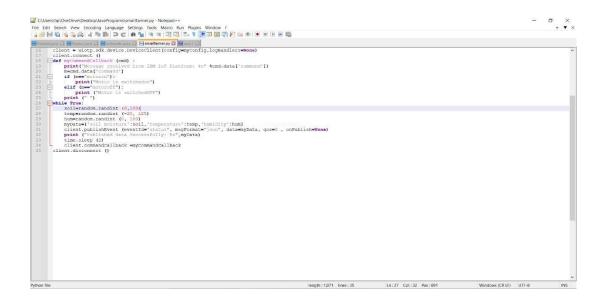


### 8.2.USER ACCEPTANCE TESTING

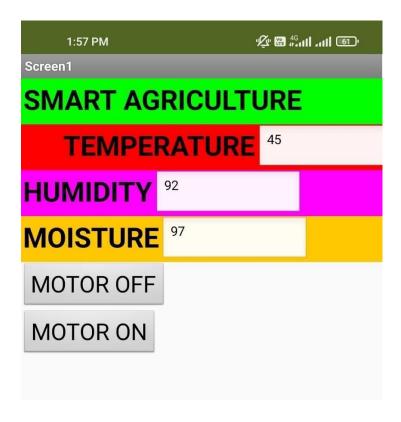

# 9.RESULTS

#### 1.2 PERFORMANCE METRICS

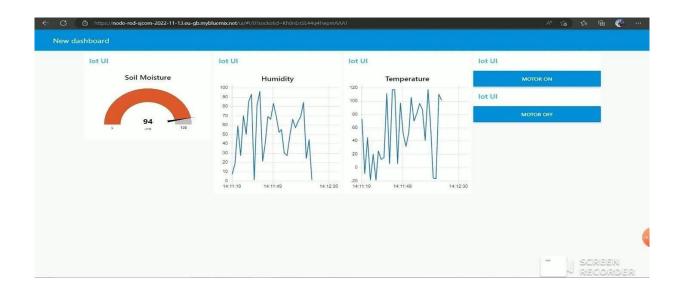

# 10. ADVANTAGES AND DISADVANTAGES

#### **ADVANTAGES:**

- A remote-control system can help in working irrigation system valves dependent on schedule. Irrigating remote farm properties can be exceptionally troublesome and labor- intensive. It gets hard to comprehend when the valves were started and whether the ideal measure of water was distributed.
- For situations where a quick reaction is required, manual valve actuation may not be conceivable constantly. Thus, remote observing and control of irrigation systems, generators or wind machines or some other motor-driven hardware become the next logical step.
- ➤ Various solutions are available to monitor engine statistics and starting or stopping the engine. When the client chooses to begin or stop the motor, the program transmits a sign to the unit within seconds by means of a mobile phone system.
- > Submersible weight sensors or ultrasonic sensors can screen the degree of tanks, lakes, wells and different kinds of fluid stockpiling like fuel and compost. The product figures volume dependent on the tank or lake geometry after some time. It conveys alarms dependent on various conditions.

### **DISADVANTAGES:**

- ➤ The smart agriculture needs availability of internet continuously. Rural part of most of the developing countries do not fulfil this requirement. Moreover, internet connection is slower.
- ➤ The smart farming-based equipment require farmers to understand and learn the use of technology. This is major challenge in adopting smart agriculture farming at large scale across the countries.

# 11. CONCLUSION

Farmers can benefit greatly from an IoT-based smart agriculture system. As a result of the lack of irrigation, agriculture suffers. Climate factors such as humidity, temperature, and moisture can be adjusted dependent on the local environmental variables. This technology also detects animal invasions, which are a major cause of crop loss. This technology aids in the scheduling of irrigation based on present data from the field and records from a climate source. It helps in deciding the farmer to whether to do irrigation or not to do. Continuous internet connectivity is required for continuous monitoring of data from sensors. This also can be overcome by using GSM unit as an alternative of mobile app. By GSM, SMS can be sent to farmer's phone.

# 12. FUTURE SCOPE

In the current project we have implemented the project that can protect and maintain the the crop. In this project the farmer monitors and control the field remotely. In future we canadd or update few more things to this project

- We can create few more models of the same project, so that the farmer can have information of an entire.
- We can update this project by using solar power mechanism. So that the power supply from electric poles can be replaced with solar panels. It reduces the power line cost. It will be a onetime investment. We can add solar fencing technology to this project.
- We can use GSM technology to this project so that the farmers can get the information directly to his home through SMS. This helps the farmer to get information if there is an internet issue.
- We can add camera feature so that the farmer can monitor his field in real time. This helps in avoiding thefts.

# 14. APPENDIX

#### **SOURCE CODE**

```
import wiotp.sdk.device
import time
import os
import datetime
import random
myConfig ={
  "identity": {
     "orgId": "0hzydu",
      "typeId": "NodeMCU",
     "deviceId": "12345"
  },
  "auth": {
    "token": "12345678"
}
client = wiotp.sdk.device.DeviceClient(config=myConfig,logHandlers=None)
client.connect ()
def myCommandCallback (cmd) :
  print("Message received from IBM IoT Platform: %s" %cmd.data['command'])
  m=cmd.data['command']
  if (m=="motoron"):
    print("Motor is switchedon")
  elif (m=="motoroff"):
    print ("Motor is switchedOFF")
  print (" ")
while True:
  moist =random.randint (0,100)
  temp=random.randint (-20, 125)
  hum=random.randint (0, 100)
```

```
myData={'moisture':moist,'temperature':temp,'humidity':hum}
  client.publishEvent (eventId="status", msgFormat="json", data=myData, qos=0,
  onPublish=None)
  print ("Published data Successfully: %s",myData)
  time.sleep (2)
  client.commandCallback =myCommandCallback
  client.disconnect ()
```

Github link: https://github.com/IBM-EPBL/IBM-Project-4487-1658733487

# **Project Demo link:**

https://drive.google.com/drive/folders/1F\_CE2Y5Wtdih0pjAcup2c5MWmdHr1yxo

### YouTube video link:

https://youtu.be/4v3swKSAux8