

## USE DASHBOARD NODES FOR CREATING UI(WEB APP)

Team ID	PNT2022TMID14057
Project Name	Signs with Smart Connectivity for Better Road Safety

### STEPS:


STEP-1: Open node-red. Select and connect the required nodes from the panel.

STEP-2: After connecting nodes and getting required nodes, click on deploy.

STEP-3: The output is displayed in the DEBUG window.


STEP-4: Copy the link and add /UI to it and open it in new tab to view the gauge.

### NODE-RED FLOW:

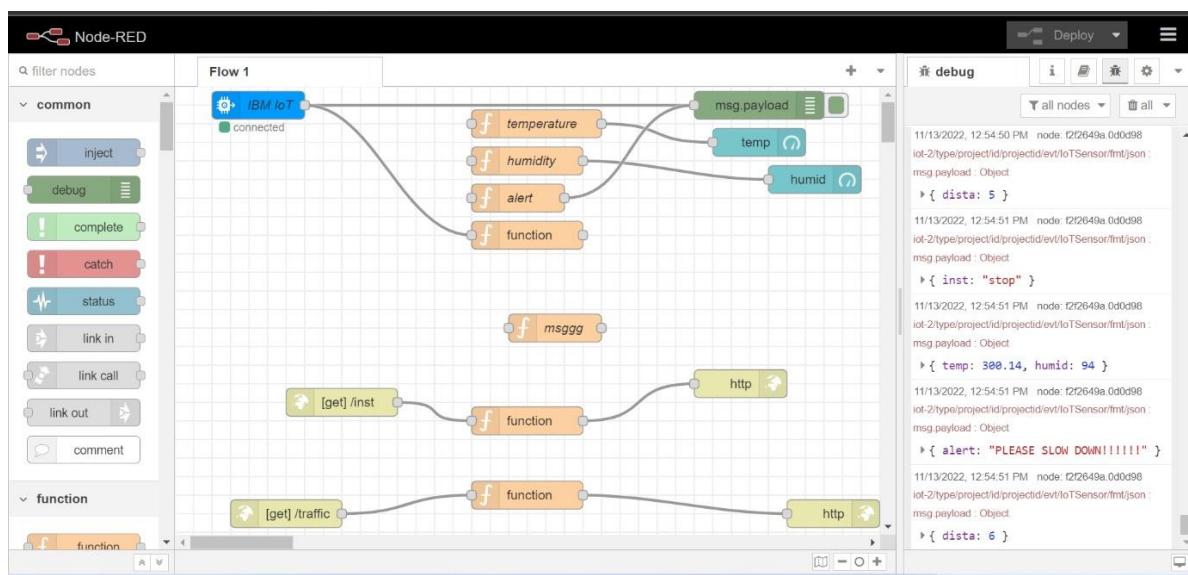

Default

humid



temp

