SPRINT 1

TEAM ID	PNT2022TMID17727
PROJECT NAME	Real-Time River water Quality Monitoring and Control System

CODE:

```
#include "DHTesp.h"
#include <cstdlib>
#include <time.h>
#include <WiFi.h>
#include <PubSubClient.h>

#define ORG "pfrrli"
#define DEVICE_TYPE "Rasp"
#define DEVICE_ID "12345"
#define TOKEN "12345678"
#define speed 0.034

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/data/fmt/json";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;

WiFiClient wifiClient;
PubSubClient client(server, 1883, wifiClient);
float temperature = 0;
int pH = 0;

String quality_status = "";
String temperture_status = "";



void setup() {
  Serial.begin(99900);


   wifiConnect();
   mqttConnect();
  }
```

```
void loop() {

  srand(time(0));

    //initial variable
    int p;

    temperature = random(-20,40);
    pH = random(0,14);
    if(pH > 6.5 && pH < 8.5){
       p = 0;
    }
    else{
       p = 1;
    }

    //set a quality status

    switch (p) {
    case 0:
       quality_status = "Drinkable";
       break;
    case 1:
       quality_status = "Not Drinkable";
       break;
    }

  //Obivously the output.It is like json format 'cause it will help us for future sprints
    String payload = "{";
    payload+="\"pH level is \":";
    payload+=pH;
    payload+=",";
    payload+="\"Temperature of Water\":";
    payload+=(int)temperature;
    payload+=",";
    payload+="\"Alert\":\""+quality_status+"\"}";
    Serial.println(payload);


  if(client.publish(publishTopic, (char*) payload.c_str()))
  {
    Serial.println("Publish OK");
  }
  else{
```

```
    Serial.println("Publish failed");
  }
  delay(1000);


  if (!client.loop())
  {
    mqttConnect();
  }



}


void wifiConnect()
{
  Serial.print("Connecting to ");
  Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED)
  {
    delay(500);
    Serial.print(".");
  }
  Serial.print("WiFi connected, IP address: ");
  Serial.println(WiFi.localIP());

}


void mqttConnect()
{
  if (!client.connected())
  {
    Serial.print("Reconnecting MQTT client to ");
    Serial.println(server);
    while (!client.connect(clientId, authMethod, token))
    {
      Serial.print(".");
      delay(500);
    }

    Serial.println();
  }
```

}

DIAGRAM.JSON:

```
{
  "version": 1,
  "author": "PNT2022TMID51903",
  "editor": "wokwi",
  "parts": [
    { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": -16.32, "left": -0.82, "attrs": {} },
    {
      "type": "wokwi-dht22",
      "id": "dht1",
      "top": -30.22,
      "left": 165.89,
      "attrs": { "temperature": "59.3" }
    }
  ],
  "connections": [
    [ "esp:TX0", "$serialMonitor:RX", "", [] ],
    [ "esp:RX0", "$serialMonitor:TX", "", [] ],
    [ "dht1:SDA", "esp:D15", "green", [ "v0" ] ],
    [ "dht1:VCC", "esp:3V3", "red", [ "v0" ] ],
    [ "dht1:GND", "esp:GND.1", "black", [ "v0" ] ]
  ]
}
```

OUTPUT:

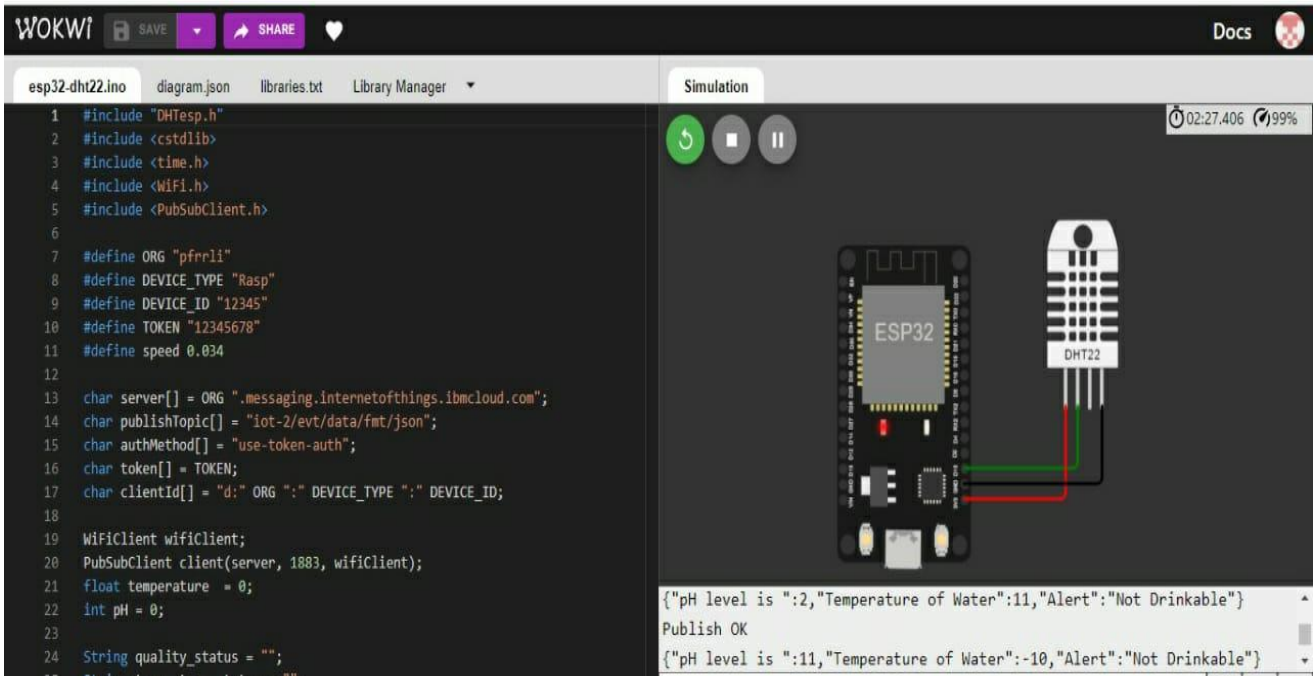
WOKWI
SAVE
SHARE
Docs
esp32-dht22.ino
diagram.json
libraries.txt
Library Manager
Simulation
02:27.406
99%
ESP32
DHT22
#include "DHTesp.h"
#include <cstdlib>
#include <time.h>
#include <WiFi.h>
#include <PubSubClient.h>
#define ORG "pfrrli"
#define DEVICE_TYPE "Rasp"
#define DEVICE_ID "12345"
#define TOKEN "12345678"
#define speed 0.034
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/data/fmt/json";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, wifiClient);
float temperature = 0;
int pH = 0;
String quality_status = "";
{"pH level is ":2,"Temperature of Water":11,"Alert":"Not Drinkable"}
Publish OK
{"pH level is ":11,"Temperature of Water":-10,"Alert":"Not Drinkable"}

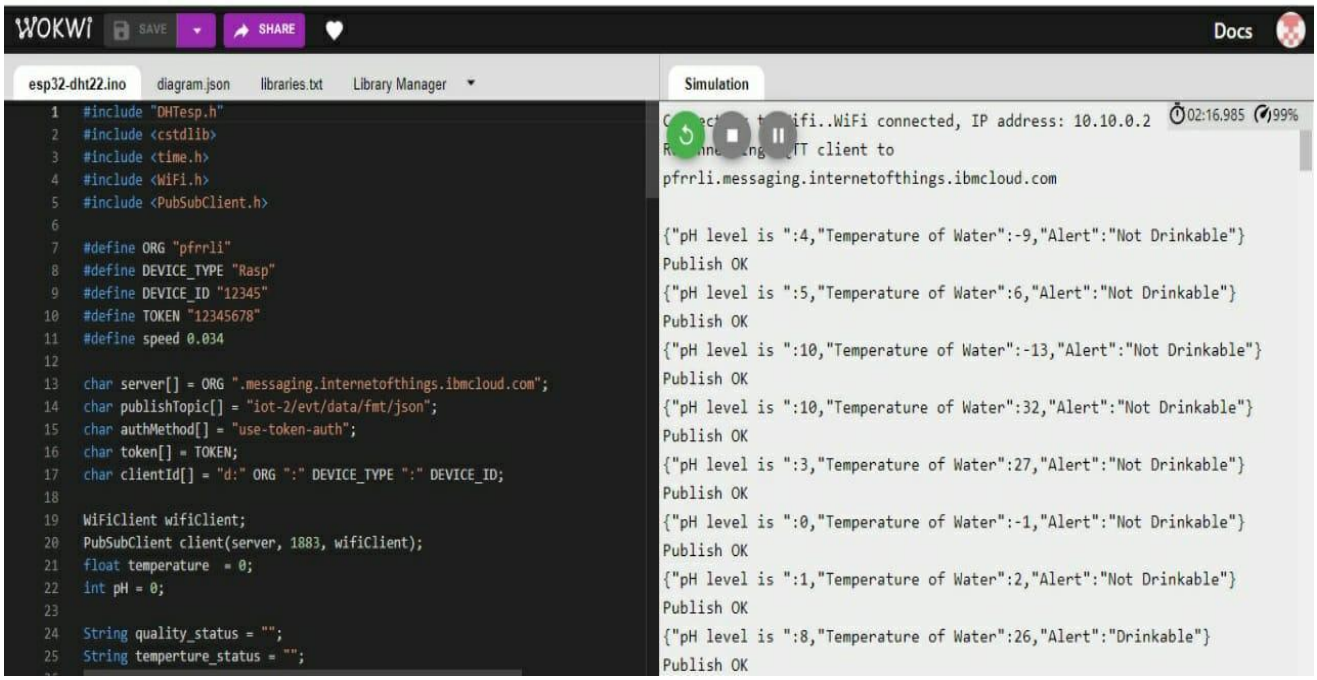
WOKWI
SAVE
SHARE
Docs
esp32-dht22.ino
diagram.json
libraries.txt
Library Manager
Simulation
02:16.985
99%
ifi..WiFi connected, IP address: 10.10.0.2
T client to
pfrrli.messaging.internetofthings.ibmcloud.com
#include "DHTesp.h"
#include <cstdlib>
#include <time.h>
#include <WiFi.h>
#include <PubSubClient.h>
#define ORG "pfrrli"
#define DEVICE_TYPE "Rasp"
#define DEVICE_ID "12345"
#define TOKEN "12345678"
#define speed 0.034
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/data/fmt/json";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, wifiClient);
float temperature = 0;
int pH = 0;
String quality_status = "";
String temperture_status = "";
{"pH level is ":4,"Temperature of Water":-9,"Alert":"Not Drinkable"}
Publish OK
{"pH level is ":5,"Temperature of Water":6,"Alert":"Not Drinkable"}
Publish OK
{"pH level is ":10,"Temperature of Water":-13,"Alert":"Not Drinkable"}
Publish OK
{"pH level is ":10,"Temperature of Water":32,"Alert":"Not Drinkable"}
Publish OK
{"pH level is ":3,"Temperature of Water":27,"Alert":"Not Drinkable"}
Publish OK
{"pH level is ":0,"Temperature of Water":-1,"Alert":"Not Drinkable"}
Publish OK
{"pH level is ":1,"Temperature of Water":2,"Alert":"Not Drinkable"}
Publish OK
{"pH level is ":8,"Temperature of Water":26,"Alert":"Drinkable"}
Publish OK