Assignment -4

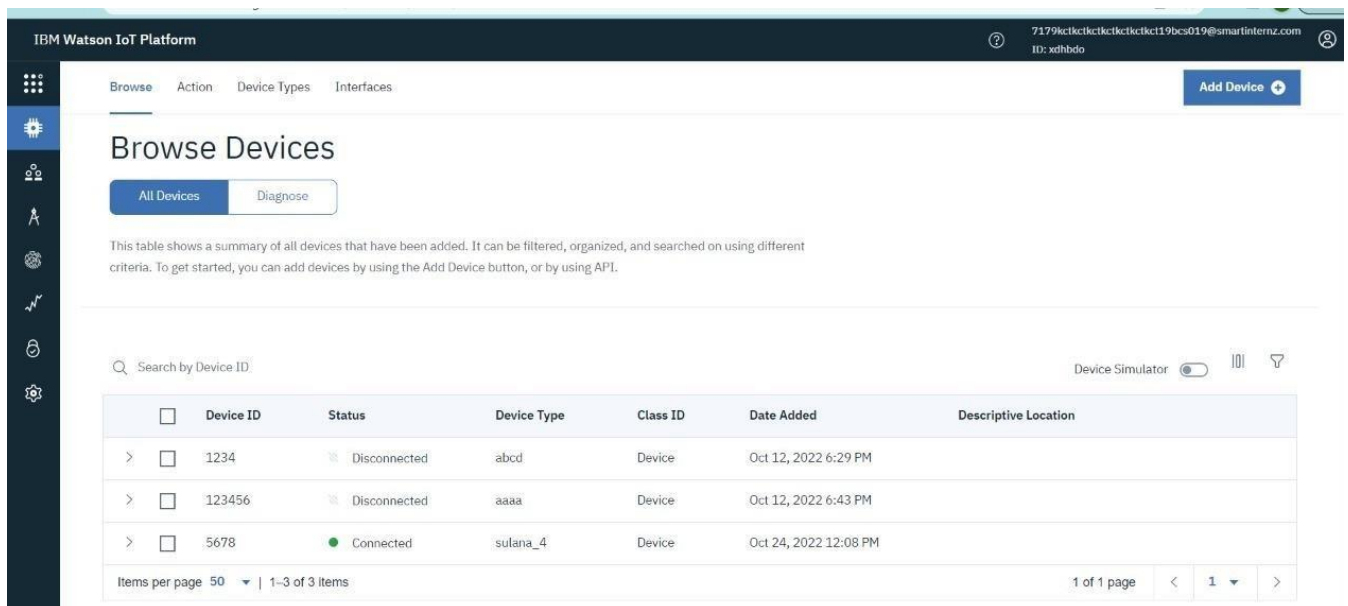| Assignment Date	19 October 2022
Student Name	Sridevi.M
Student Roll Number	731319205030

Write code and connection in Wowki for ultrasonic sensor.

Whenever distance is less than 100 cm send "Alert" to IBM cloud and display in device recent events

Wowki link: https://wokwi.com/projects/new/esp32

Step 1 : Add new device in IBM cloud

Step 2: Complete the Circuit and run the program

```
sketch.ino    diagram.json    libraries.txt    Library Manager
1   #include <WiFi.h>//library for wifi
2   #include <PubSubClient.h>//library for MQtt
3
4   void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
5   \
6   //-------credentials of IBM Accounts------
7
8   #define ORG "xdhbdo"//IBM ORGANITION ID
9   #define DEVICE_TYPE "sulana_4"//Device type mentioned in ibm watson IOT Platform
10  #define DEVICE_ID "5678"//Device ID mentioned in ibm watson IOT Platform
11  #define TOKEN "PF32(1uMuVfTcLC7)h"      //Token
12  String data3;
13
14
15  //-------- Customise the above values --------
16  char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
17  char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of event perform and format in
18  char subscribetopic[] = "iot-2/cmd/command/fmt/String";// cmd  REPRESENT command type AND COMMAND IS T
19  char authMethod[] = "use-token-auth";// authentication method
20  char token[] = TOKEN;
21  char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id
22
23  //-----------------------------------------
24  WiFiClient wifiClient; // creating the instance for wificlient
25  PubSubClient client(server, 1883, callback ,wifiClient); //calling the predefined client id by passing
26  const int trigpin = 5;
27  const int echopin = 18;
28  const int ledpin = 2;
29
30
31  long duration ;
32  float distance;
33  #define sound_speed 0.034
34  void setup() {
35      // put your setup code here, to run once:
```

Simulation

Editing Ultrasonic Distance Sensor
Distance: 95cm

```
94.94
Sending payload: {"ALERT...!!   ": 94.98}
Publish ok
ALERT....!!!
94.98
Sending payload: {"ALERT...!!   ": 94.96}
Publish ok
```

Output in WOWKI

a) when the distance is below 100 cms

```
sketch.ino    diagram.json    libraries.txt    Library Manager
1   #include <WiFi.h>//library for wifi
2   #include <PubSubClient.h>//library for MQtt
3
4   void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
5   \
6   //-------credentials of IBM Accounts------
7
8   #define ORG "xdhbdo"//IBM ORGANITION ID
9   #define DEVICE_TYPE "sulana_4"//Device type mentioned in ibm watson IOT Platform
10  #define DEVICE_ID "5678"//Device ID mentioned in ibm watson IOT Platform
11  #define TOKEN "PF32(1uMuVfTcLC7)h"      //Token
12  String data3;
13
14
15  //-------- Customise the above values --------
16  char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
17  char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of event perform and format in
18  char subscribetopic[] = "iot-2/cmd/command/fmt/String";// cmd  REPRESENT command type AND COMMAND IS T
19  char authMethod[] = "use-token-auth";// authentication method
20  char token[] = TOKEN;
21  char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id
22
23  //-----------------------------------------
24  WiFiClient wifiClient; // creating the instance for wificlient
25  PubSubClient client(server, 1883, callback ,wifiClient); //calling the predefined client id by passing
26  const int trigpin = 5;
27  const int echopin = 18;
28  const int ledpin = 2;
29
30
31  long duration ;
32  float distance;
33  #define sound_speed 0.034
34  void setup() {
35      // put your setup code here, to run once:
```

Simulation

Editing Ultrasonic Distance Sensor
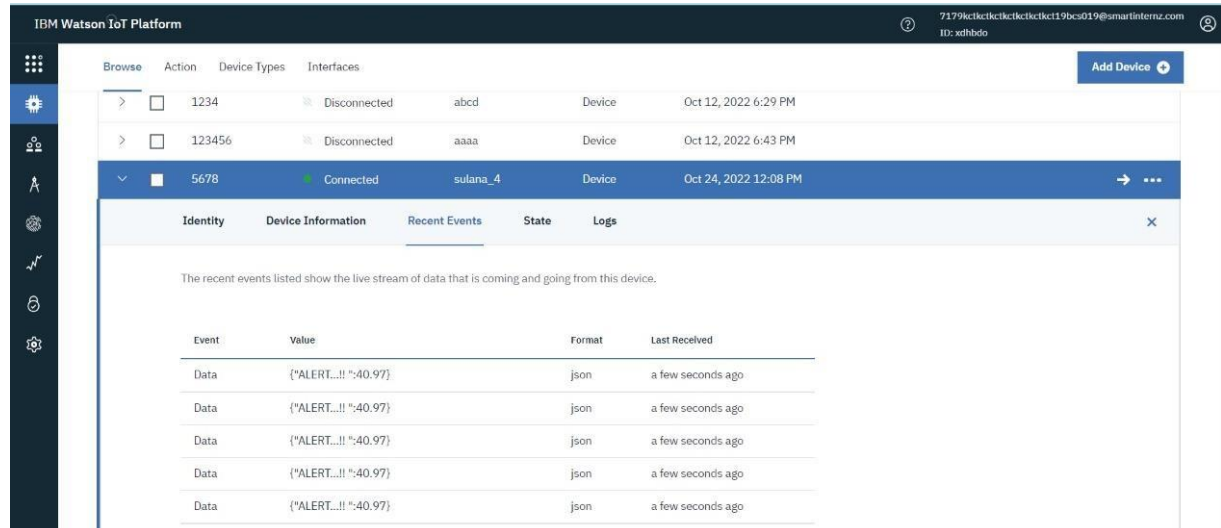Distance: 80cm

```
ALERT....!!!
79.97
Sending payload: {"ALERT...!!   ": 79.97}
Publish ok
ALERT....!!!
79.97
Sending payload: {"ALERT...!!   ": 79.97}
```

b) when the distance is above 100 cms ,(no alert message is displayed here for 202 cm)
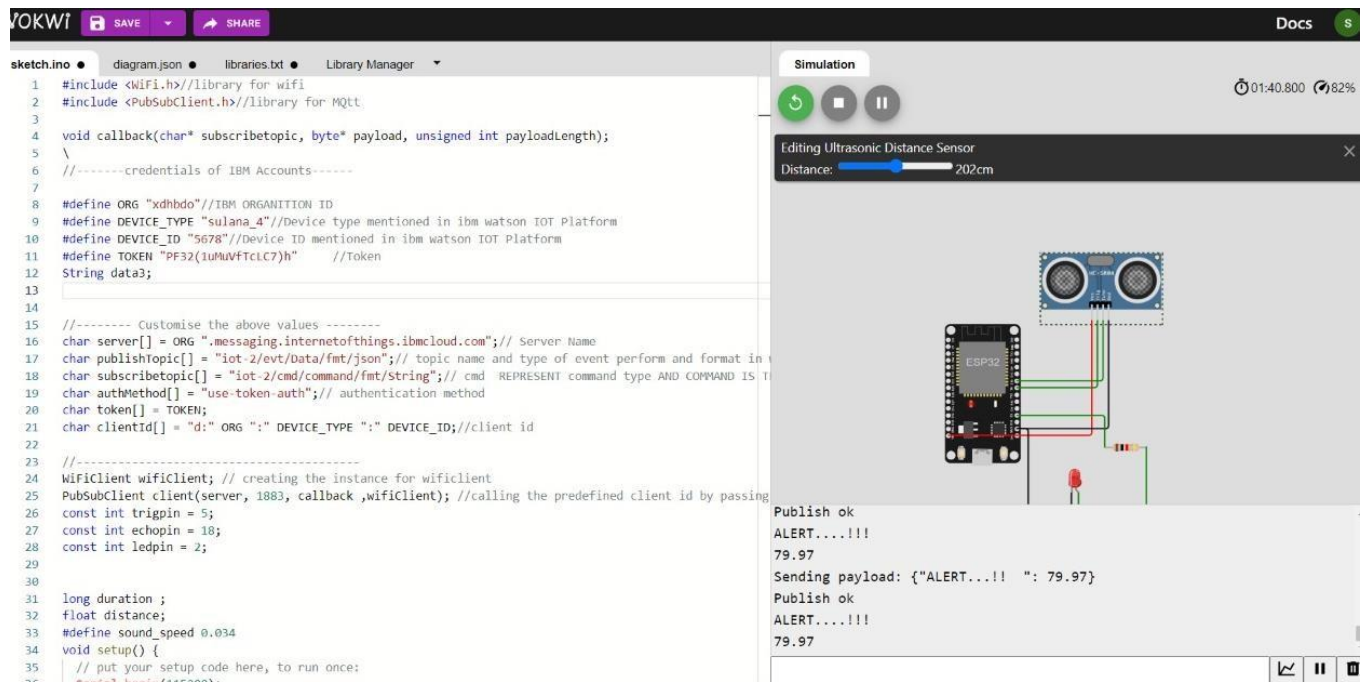
Output in IBM CLOUD (Watson Platform)

Displayed in device recent events

Program:

```
#include <WiFi.h>//library for wifi
#include <PubSubClient.h>//library for MQtt
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
\
//-------credentials of IBM Accounts------
```

```
#define ORG "xdhbdo"//IBM ORGANITION ID
#define DEVICE_TYPE "sulana_4"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "5678"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "PF32(1uMuVfTcLC7)h"     //Token
String data3;
//-------- Customise the above values --------
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of event perform and format
in which data to be send
char subscribetopic[] = "iot-2/cmd/command/fmt/String";// cmd REPRESENT command type AND
COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id

//...............................................
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient); //calling the predefined client id by passing
parameter like server id,portand wificredential
const int trigpin = 5;
const int echopin = 18;
const int ledpin = 2;

 long duration ;
float distance;
#define sound_speed 0.034
void setup() {
  // put your setup code here, to run once:
  Serial.begin(115200);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, OUTPUT);
  pinMode(ledpin, OUTPUT);
  wificonnect();
  mqttconnect();
}

void loop() {
  digitalWrite(trigpin, LOW);
  digitalWrite(trigpin, HIGH);
  delayMicroseconds(10);
  digitalWrite(trigpin, LOW);

  duration= pulseIn(echopin,HIGH);
  distance = duration * sound_speed /2;
  if(distance<=100){
  PublishData(distance);
  delay(1000);
  if (!client.loop()) {
```

```arduino
    mqttconnect();
  }
  digitalWrite(ledpin, HIGH);
  Serial.println("ALERT... !!!");
  Serial.println(distance);
  }
  else
  {
  digitalWrite(ledpin, LOW);
  }
  // put your main code here, to run repeatedly:
  delay(10); // this speeds up the simulation
}
/*....................................retrieving to Cloud............................ */
void PublishData(float distance) {
  mqttconnect();//function call for connecting to ibm
    // creating the String in in form JSon to update the data to ibm cloud
  String payload = "{\"ALERT...!!  \": ";
  payload += distance;
  payload += "}";

  Serial.print("Sending payload: ");
  Serial.println(payload);

  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");// if it sucessfully upload data on the cloud then it will print publish ok
in Serial monitor or else it will print publish failed
  } else {
    Serial.println("Publish failed");
  }
}
void mqttconnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting client to ");
    Serial.println(server);
    while (!!!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }
    initManagedDevice();
    Serial.println();
  }
}
void wificonnect() //function defination for wificonnect
{
  Serial.println();
  Serial.print("Connecting to ");
```

```
    WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
    while (WiFi.status() != WL_CONNECTED) {
      delay(500);
      Serial.print(".");
    }
    Serial.println("");
    Serial.println("WiFi connected");
    Serial.println("IP address: ");
    Serial.println(WiFi.localIP());
}
void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic);
  for (int i = 0; i < payloadLength; i++) {
    //Serial.print((char)payload[i]);
    data3 += (char)payload[i];
  }
  Serial.println("data: "+ data3);
  if(data3=="lighton")
  {
      Serial.println(data3);
  }
  else
  {
      Serial.println(data3);
  }
data3="";
}
```