SMART WASTE MANAGEMEMT SYSTEM FOR METROPOLITIAN CITIES

A PROJECT REPORT

Submitted by

- a. LUCKNESHWARAN E
- b. RANJITH P
- c. VIJAYA KUMAR S
- d. SYED SADAM HUSSAIN J

in partial fulfillment for the award of degree of

Bachelor of Engineering (B.E.) in

ELECTRONICS AND COMMUNICATION ENGINEERING

SRM TRP ENGINEERING COLLEGE
ANNA UNIVERSITY NOVEMBER 2022



ACKNOWLEDGEMENT

We would like to express our special thanks of gratitude to our Faculty

Mentor and Industry Mentor for their support and guidance in

completing our project on the Smart Waste Management System For

Metropolitian Cities

We would like to extend our gratitude to the IBM for Nalaiya Thiran

project for providing us with all the facility that was required. It

was a great learning experience. We would like to take this

opportunity to express our gratitude.

TEAM LEADER:

LUCKNESHWARAN E

(814719106035)

TEAM MEMBERS:

RANJITH P

(814719106047)

VIJAYA KUMAR S

(814719106066)

SYED SADAM HUSSAIN J

(814719106062)

INDUSTRY MENTOR: DINESH

FACULTY MENTOR: PARAMESWARAN G

TITLE

- 1.ABSTRACT
- 2.INTRODUCTION
- 3.METHODOLOGY 4.LITERATURE

REVIEW

- a. Pros
- b. Applications
- c. Hardware setup
- **5.PROJECT PHASE**
- a. PHASE 1
- b. PHASE 2
- **6.PROJECT DESIGN**
- 7.PROJECT DEVELOPMENT PHASE
- a Sprint 1
- b Sprint 2
- c Sprint 3
- d Sprint 4
- 8.PROGRAM
- 9.ADVANTAGES
- &DISADVANTAGES
- 9. DISCUSSION
- 10. FUTURE SCOPE
- 11. CONCLUSION
- 12. REFERENCE

ABSTRACT

With urbanization, rising income and consumption, the production of waste increases. One of the most important directions in the field of sustainable development is the design and implementation of monitoring and management systems for waste collection and removal. Smart waste management (SWM) involves for example collection and analytics of data from sensors on smart garbage bins (SGBs), management of waste trucks and urban infrastructure; planning and optimization of waste truck routes; etc. The purpose of this paper is to provide a comprehensive overview of the existing research in the field of systems, applications, and approaches vis-à-vis the collection and processing of solid waste in SWM systems. To achieve this objective, we performed a systematic literature review. This study consists of 173 primary studies selected for analysis and data extraction from the 3,732 initially retrieved studies from 5 databases. We 1) identified the main approaches and services that are applied in the city and SGB-level SWM systems, 2) listed sensors and actuators and analyzed their application in various types of SWM systems, 3) listed the direct and indirect stakeholders of the SWM systems, 4) identified the types of data shared between the SWM systems and stakeholders, and 5) identified the main promising directions and research gaps in the field of SWM systems. Based on an analysis of the existing approaches, technologies, and services, we developed recommendations for the implementation of city-level and SGB-level SWM systems

INTRODUCTION

According to one estimate, 1 the world population is projected to reach 9.9 billion by 2050, an increase of more than 25% from the current 2020 population of 7.8 billion. With the growth of the world's population and the gradual relocation of a large number of people to cities, the concept of smart cities is becoming ever more relevant. A smart city is a concept that entails integrating a range of information and communication technologies, such as the Internet of Things (IoT), to manage public space and city services in a sustainable manner. Climate change and ensuing events, such as rising sea levels, flooding from changing river flows, and increased risk of greenhouse heat major challenges for sustainable development. islands are Additionally, in accordance with demographic changes, as well as technological, economic, social, and environmental challenges, should be identified as factors that create significant constraints for cities. One of the most important directions in the field of sustainable development is the design and implementation of monitoring and management systems for waste collection and removal. With urbanization, rising income and consumption, the production of waste increases. According to estimates the amount of waste is expected to increase to 2.2 billion tons by 2025 worldwide.

METHODOLOGY

We have chosen the systematic literature review (SLR) as the method of reviewing and analyzing the existing SWM system approaches presented in the literature. The SLR uses data from previously published (primary) studies for the purpose of research synthesis. Research synthesis is the collective term for a family of methods for summarizing; integrating; and, when possible, combining the findings of different studies on a topic or RQ. Such synthesis can also identify crucial areas and questions that have not been

adequately addressed in past empirical research. The purpose of an SLR is to provide an exhaustive summary of the available literature relevant to the RQs. The SLR follows a formal protocol that will be described in this section. The SLR used in this study consists of the following stages as proposed by Kitchenham:

- 1) Identification of research
- a) RQs for the literature review
- b) Selection of the databases
- c) Development of the search queries
- 2) Selection of primary studies based on the inclusion and exclusion criteria
- 3) Data extraction process
- 4) Data synthesis

Literature review:

In the recent spans of years, Urbanization has inflated terribly nice in size and there's a rise in waste production. Waste management has been a typical issue to be thought of. during this paper, sensible bin is constructed with ARM microcontroller that is interfaced With UART and IR sensors. IR sensors square measure placed at each ends of trash bin. They work under AND operation. When the dust bin is filled message will be sent to the respective mobile displaying "Garbage is filled". It ceaselessly alerts the specified authority till the rubbish within the garbage can is press. Once the garbage can is press,

individuals will recycle the garbage can. Once these dustbins are enforced on an outsized scale, by substitution ancient bins, waste will be re-used expeditiously and avoids gratuitous lumping of wastes on road aspect. Foul smell from these rotten wastes that remained untreated for while, because of neglectfulness of authorities and public could cause sturdy issues. Breeding of insects and mosquitoes will produce nuisance around promoting unclean atmosphere. this might even cause dreadful diseases.

Pros:

- Advancement of smart city system.
- Effective management of the city waste helps people life style to improve
- Making the garbage system an IoT application opens path to a lot of different opportunities
- Hands on Device system for garbage system helps to have a more detailed update on the disposal system.

Applications:

- Can be implemented in highly trafficking system
- Apartment based lifestyle has a huge requirement for this kind of system
- Helps city people to have a update on garbage system


Hardware Setup:

The implementation of the smart garbage monitoring system is done by following the design approach as discussed earlier. The program is based on the Ccompiler based IOT technique is loaded into the ARM micro-controller. The ARM 7 LPC 2148 micro-controller is used and the compiler lab code written can be ported on to the microcontroller using Code Composer Studio. The LCD module is connected onto the ARM 7 LPC 2148 kit, to deliver the latitudinal and longitudinal positions thus developed is also sent the respective mobile. ARM micro-controller is high speed ant is d based on RISC architecture. It has 64 bit micro-processor. It has reduced complexity, less power consumption and smaller size. The 16*2 LCD module can display 224 symbols is interfaced with LPC 2148 kit, it is helpful in providing user interface as well as for debugging purpose. LCD modules can display textual information as well as numerical information to user. The 16 by 2 LCD interface supports both 4 bit and 8bit. and facilitates to adjust. It has 16 characters per line by 2 lines. That is each line displays 16 characters in 2 lines. Also the GSM module is interfaced with the UART, C program to send a message from LPC 2148 to mobile through GSM.

PROJECT PHASE:

PHASE 1


PROBLEM SOLUTION

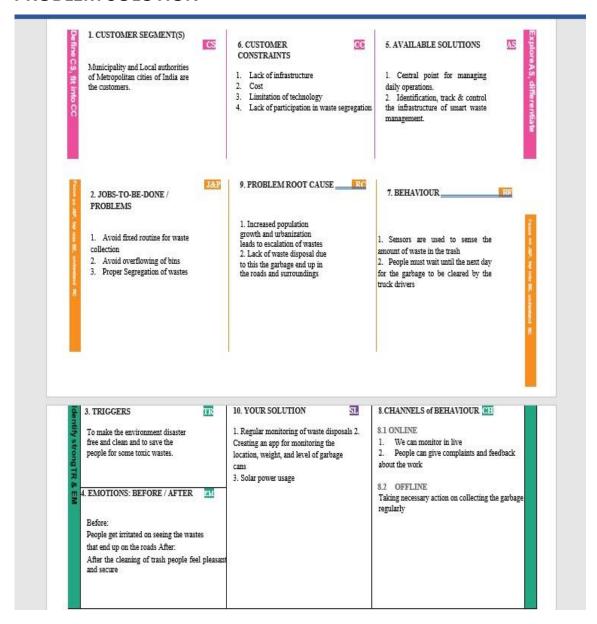

PROPOSED SOLUTION:

S.No.	Parameter	Description
1.	Problem Statement (Problem to be solved)	To maintain waste in the metropolitan cities and to maintain the clean environment which is polluted by the wastes and to dispose wastes.
2.	Idea / Solution description	-Software can be implemented -Fine can be implemented -Create awareness
3.	Novelty / Uniqueness	This system provides awareness among the people and safeguard the environment with the help of people.
4.	Social Impact / Customer Satisfaction	Clean cities Healthy environment Peaceful life
5.	Business Model (Revenue Model)	-Offering software as a service model to government. -Making use of useful wastes and making it us money.
6.	Scalability of the Solution	To help government to maintain clean environment.


SOLUTION ARCHITECTURE:

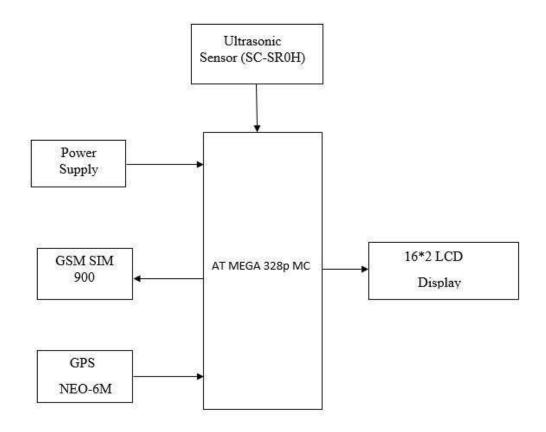

PHASE 2 CUSTOMER JOURNEY:



DATA FLOW DIAGRAM:

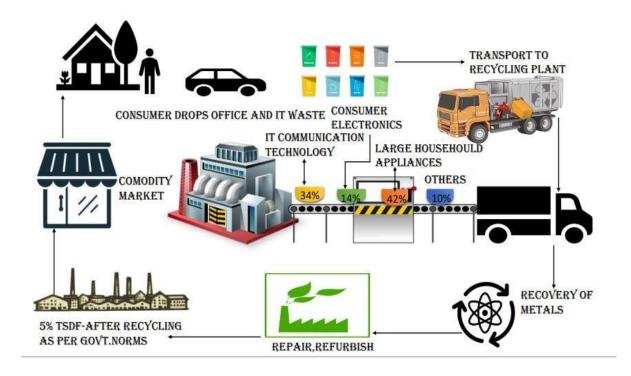

FUNCTIONAL REQUIREMENT:

Following are the functional requirements of the proposed solution.

	Functional Requirement (Epic)	Sub Requirement (Story / Sub-Task)
FR-1	Detailed bin inventory.	All monitored bins and stands can be seen on the map, and you can visit them at any time via the Street View feature from Google. Bins or stands are visible on the map as green, orange or red circles. You can see bin details in the Dashboard – capacity, waste type, last measurement, GPS location and collection schedule or pick recognition.

FR-2	Real time bin	The Dachheard displays real time data
11-2		The Dashboard displays real-time data
	monitoring.	on fill-levels of bins monitored by smart
		sensors.
		In addition to the % of fill-level, based
		on the historical data, the tool predicts
		when the bin will become full, one of
		the functionalities that are not
		included even in the best waste
		management software
		Sensors recognize picks as well; so you
		can check when the bin was last
		collected.
		With real-time data and predictions,
		you can eliminate the overflowing bins
		and stop collecting half-empty ones.

FR-3	Expensive bins.	We help you identify bins that drive up your collection costs. The tool calculates a rating for each bin in terms of collection costs. The tool considers the average distance depo-bin- discharge in the area. The tool assigns bin a rating (1-10) and calculates distance from depo-bin discharge.
FR-4	Adjust bin distribution.	Ensure the most optimal distribution of bins. Identify areas with either dense or sparse bin distribution. Make sure all trash types are represented within a stand. Based on the historical data, you can adjust bin capacity or location where necessary.
FR-5	Eliminate unefficient picks.	Eliminate the collection of half-empty bins. The sensors recognize picks. By using real-time data on fill-levels and pick recognition, we can show you how full the bins you collect are.
		The report shows how full the bin was when picked. You immediately see any inefficient picks below 80% full.
FR-6	Plan waste collection routes.	The tool semi-automates waste collection route planning. Based on current bin fill-levels and predictions of reaching full capacity, you are ready to respond and schedule waste collection. You can compare planned vs. executed routes to identify any inconsistencies.

Objective:

The main objective of the smart waste management system is to develop a new type of waste management in government and individual waste treatment industries to gather waste material for the purpose of recycling and disposal of human waste products, electronics, medical to be disposed safely with usage of multiple modern developed web based user management and IOT devices based on the garbage bin.

End result:

The garbage bin consist of IOT devices at the top and bottom of the garbage bin which helps to analyze the weight and the amount of space in the dustbin which helps the worker and the waste management acquire date of waste products dropped by people at individual location in order to maintain and collect and cover a vast area of the city with the report given by the garbage bins.

Focus:

The customer or the person who proceeds to drop and waste in the dustbin must notify the type of waste was to dropped. The method will helps prevention of liquid matter which to dropped which may cause damage to the IOT Devices in bottom. Since the specification known only to the Smart city management team, they

must advise the worker to conduct a journey to analyze how people drop their waste based on their activities which help the worker to advise the customer to be aware of the device inside the dustbin.

Essentiality:

The IOT device must send data to the Smart city waste management team in order to check the level of the dustin space and the area location where it currently moves , it must send indication level time to time for filling of the waste products ,the localized dustbin may vary from small dustbin to bigger truck as the IOT devices may eligible for both of them.


Types:

The dustbin distributed in all areas of region of the city and the dustbin will minimize the amount taken to manage by the customer. It varies from individual dustbin to Business development area manageable area dustbin where raw materials calculated and disposed easily and safely and service will be in both customer and to medicals units in allowance of the customer. The dustbin manages all types of units and waste products which the IOT helps the manage the space and indication of another in case of full of the one's dustbin which customer allocate another dustbin to provide service to area within the fraction of seconds

Technology Architecture:


The Deliverable shall include the architectural diagram as below and the information as per the table 2

Example: Order processing during pandemics for offline mode

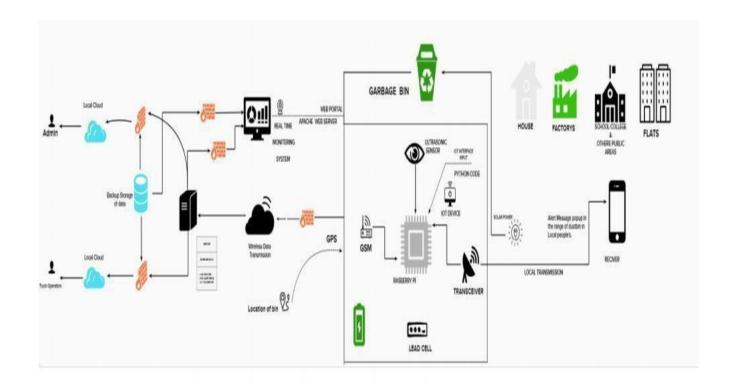



PROJECT DESGN:

DATA FLOW DIAGRAMS:

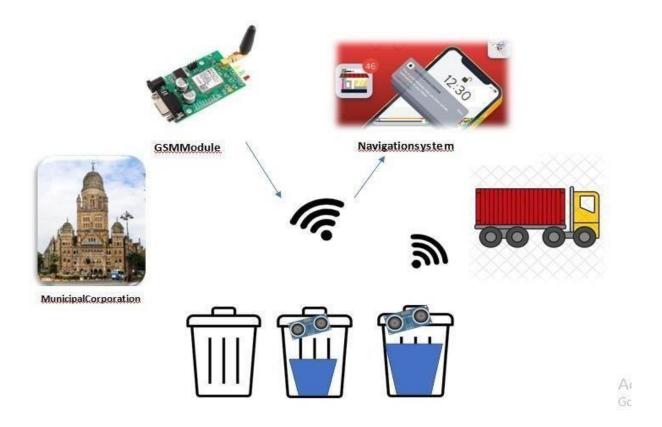


PROJECT DEVELOPMENT PHASE:

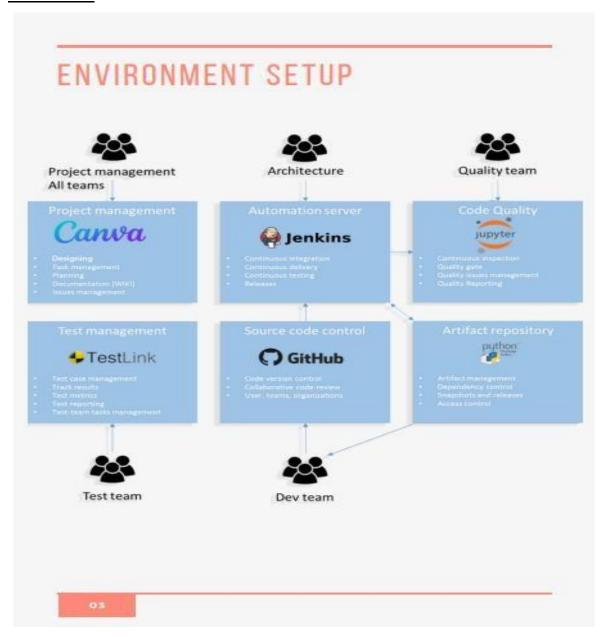


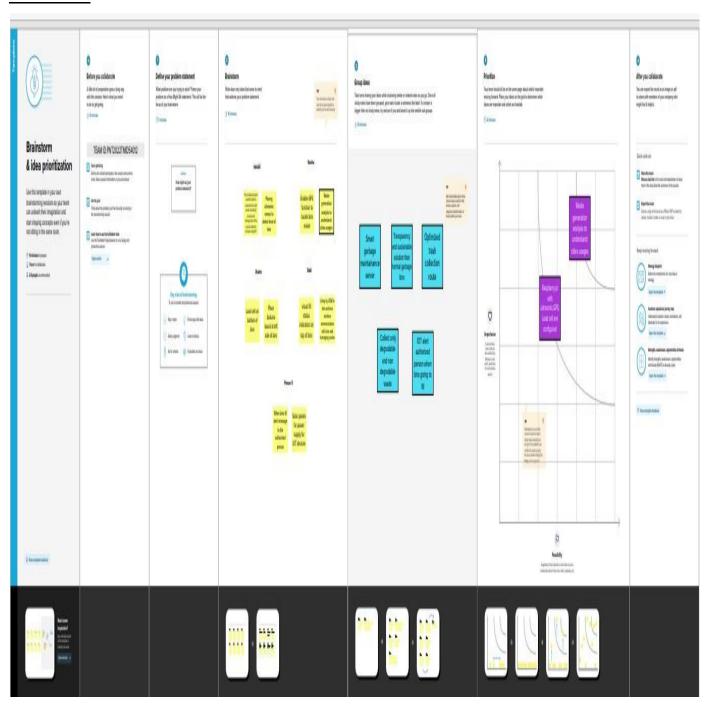

SPRINT DELIVERY 3

- REQUIREMENT ANALYSIS
- CUSTOMER JOURNEY
- DATA FLOW DIAGRAMS
- TECHNOLOGY ARCHITECTURE

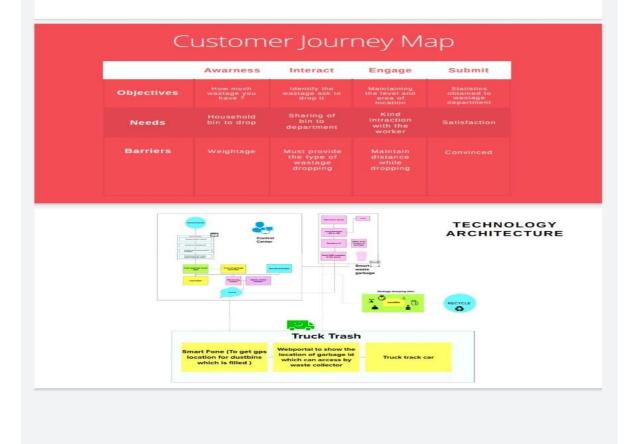

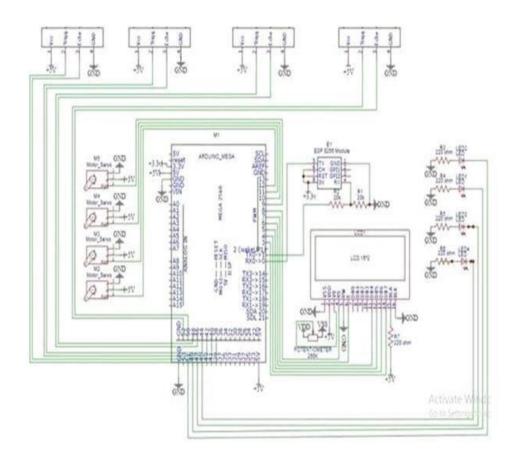

In the above circuit diagram, On the left most side ultrasonic sensor is connected trigger pin = 38 (output) and echo = 40(input). On the left 2nd one ultrasonic sensor is connected trigger pin = 42 (output)and echo = 44(input). On the 3rd ultrasonic sensor is connected trigger pin = 46 (output)and echo = 48(input). On the right most side ultrasonic sensor is connected trigger pin = 52 (output)and echo = 50(input). M2, M3, M4, M5, are servo motors. At M2,

pwm=12. At M3, pwm=11. At M4, pwm=10. At M5, pwm=9. LED 2=51 LED 1 =49 LED 3 = 47 LED 4 =45. We use esp 8266. So the tx is connected to rx 0. And the rx is connected to tx 0. Then the other pin of the 16 *2 LED display.

PROGRAM:

```
import requests
imporison
importibmiotf.application
importibmiotf.device
import time import
random import sys
# watson device details
organization ="4yi0vc"
devicType ="BIN1" deviceId
="BIN1ID" authMethod
="token" authToken
="123456789"
# generate random values for randomo variables
(temperature&humidity) def
myCommandCallback(cmd):
global a
print("command recieved:%s" % cmd.data['command'])
control = cmd.data['command'] print(control) try:
deviceOptions = {"org": organization, "type": devicType, "id":
deviceId, "authmethod": authMethod, "authtoken": authToken}
```

```
deviceCli = ibmiotf.device.Client(deviceOptions) except
Exception as e:
print("caught exception connecting device %s" % str(e)) sys.exit()
# connect and send a datapoint "temp" with value integer value into
the cloud as a type of event for every 10 seconds
deviceCli.connect() while True:
distance = random.randint(10, 70)
loadcell = random.randint(5, 15) data
={'dist': distance, 'load': loadcell} if
loadcell < 13 and loadcell > 15:
load = "90 %" elif loadcell < 8 and
loadcell > 12:
load = "60 %" elif loadcell < 4 and
loadcell > 7:
load = "40 %" else:
load = "0 %" if
distance < 15:
dist = 'Risk
warning:'
'Dumpster
poundage
getting high,
Time to collect
:) 90 %' elif
distance < 40
and distance >
16:
```

```
dist = 'Risk warning:' 'dumpster is above 60%' elif
distance < 60and distance > 41: dist =
'Risk warning:' '40 %' else: dist = 'Risk
warning: '17 %' if load == "90 %" or
distance == "90 %":
warn = 'alert :' ' Dumpster poundage getting high, Time to collect :)'
elif load == "60 %" or distance == "60 %":
warn = 'alert :'
'dumpster is above 60%' else: warn = 'alert :'
'No need to collect right now '
def myOnPublishCallback(lat=10.678991, long=78.177731):
print("Gandigramam, Karur") print("published distance = %s " %
distance, "loadcell:%s" % loadcell, "lon = %s" % long, "lat = %s"
% lat) print(load) print(dist) print(warn) time.sleep(10) success =
deviceCli.publishEvent("IoTSensor", "json", warn, qos=0,
on publish=
myOnPublishCallback) success =
deviceCli.publishEvent
("IoTSensor", "json", data, qos=0, on_publish=
myOnPublishCallback) if not success:
print("not connected to ibmiot") time.sleep(30)
deviceCli.commandCallback = myCommandCallback
# disconnect the device deviceCli.disconnect
Footer
© 2022 GitHub, Inc.
```

ADVANTAGES:

The proposed plan has many advantages, it is also cogent enough to be implemented in every street of a developing nation. the advantages lie in its easy and valuable functioning. This will not only improve the streets we live in, but also provide a pavement for better working system.

- Efficient and effective Functioning.
- Cleaner Environs
- Better health issues.
- Pollution free and stinking free environs
- Smart cities
- Technology development
- Tourist attraction.

Once implemented, this method would be easy to work on. The garbage will be dumped into the bins thereby reducing the healththreats imposed by the trash present all-around.

DISADVANTAGES:

System requires more number of waste bins for separate waste collection as per population in the city. This results into high initial cost due to expensive smart dustbins compare to other methods.
 Sensor nodes used in the dustbins have limited memory size.

- Wireless technologies used in the system such as zigbee and wifi have shorter range and lower data speed. In RFID based systems, RFID tags are affected by surrounding metal objects (if any).
- It reduces man power requirements which results into increase in unemployments for unskilled people.
- The training has to be provided to the people involved in the smart waste management system.

DISCUSSION:

It became evident from the primary studies that the SWM concept needed to be divided into city-level SWM system descriptions and low-level element descriptions—especially the SGB studies. Both levels use technologies to provide different services. At the SWM level, various communication technologies, from very short-range technologies to Internet - wide communication, are proposed for the transfer of information. Apart from the communication with the local elements of the SWM system, such as SGBs , the system- level communication mainly utilizes Wi-Fi and mobile network for data transfer. The data are then used in the SWM system to provide various services.

Most parts of the systems analyse real-time data (used in most routing and optimization systems, business cases, and basic SWM systems). The use of the analysed historical data is much less common. In many of the city level studies, the data are first analysed, and then these data (or part thereof) are provided through interfaces—for example, the city dashboard—for various stakeholders. The city dashboard could, for example, display the locations of SGBs, information about SGBs (type of waste, fullness, etc.), location of trucks, truck routes, and the location of

wasteprocessing facilities and dumps. The city dashboard can also be used as a part of routing planning and optimization system for drivers, information support systems for citizens, and information support systems for dispatchers. In addition to the city dashboard, SWM systems also provide information support for various stakeholders: citizens, city administration, waste department, drivers, dispatchers, waste disposal organizations, corresponding authorities, and emergency services.

In most cases, the SWM systems aim to optimize the waste collection processes by organizing timely garbage disposal while minimizing costs (fuel and working hours of drivers) and improving the environmental situation. The most commonly used services for this are route planning, optimization and scheduling (static or dynamic). Some authors also offer optimization of the location of SGBs, typically in combination with route optimization or planning. Door-to-door garbage collection is used in several SWM systems with the aim of improving urban ecology.

FUTURE SCOPE:

Every project is always has scope for improvement, perhaps the most pressing issue of separation of waste is when their dispose simultaneously. The waste segregator can be improvised to include the separation of paper and plastic, safe segregation of biomedical waste generated at home, compact and aesthetic Mechanical design.


The moisture sensor can be implemented hand in hand with the other sensors and

the compartments for segregating the dry and wet waste can be created which will solve the issues related to waste segregation.

The future of Waste management starts and proceeds with technological

adjustments. Like every other industry, to proceed, the waste management industry needs to become digitized and data-driven to advance its work field. The future is smart and competitive! Especially for businesses, they are required to be one step ahead of their competitors. When smart waste management solutions are applied over time, the data is collected. These data in hand sensors can be used to identify fill patterns, optimize driver routes and schedules, and reduce operational costs. These sensors' cost is steadily decreasing, making smart bins more feasible to implement and more attractive to companies or city leaders.

When we say that the future is smart, it also means that it is practical. The selection of the containers minimizes the need for trash collection crews. The amount of labor and time spent on collection processes is minimized, and ultimately it's profitable. In addition to hardware, the time spent is reduced for management and reduced by using easy to use compact and comprehensive platforms and mobile apps for both ends of the waste management Processes.

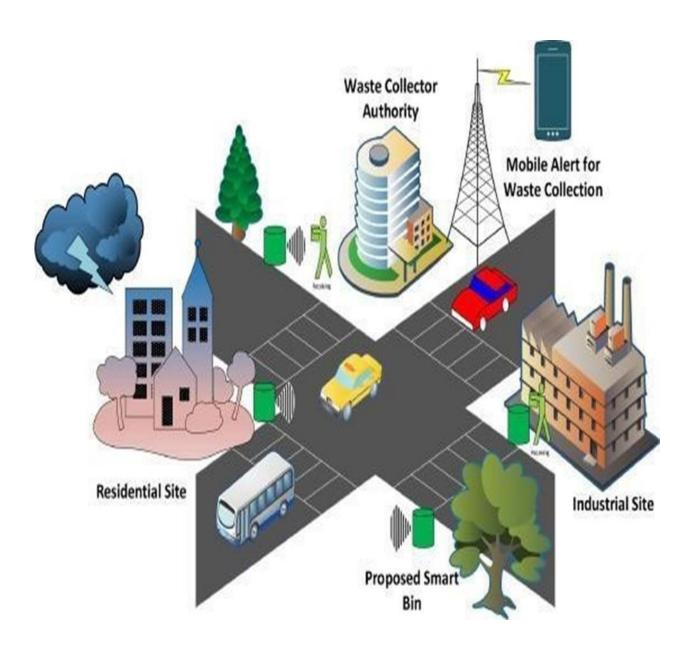

APPENDIX:

SOURCE CODE:

Waste management system

Backend## Getting Started

Installing

Dependencies ####python3.7

we are using python as a backend language

Follow instructions to install the latest version of python for your platform in the [python docs](https://docs.python.org/3/using/unix.html#getting-and-installing-the-latest-version-of-python)

Windows

[python3.7](https://www.python.org/downloads/windows/)

virtual environment

We recommend working within a virtual environment whenever using Python for projects. This keeps your dependencies for each project separate and organaized. Instructions for setting up avirual environment for your platform can be found in the python docs

PIP Dependencies

Once you have your virtual environment setup and running, install dependencies by navigating tothe '/backend' directory and running:

```shell script

```
pip install -r requirements.txt
```

٠.,

This will install all of the required packages we selected within the 'requirements.txt' file.### key dependencies

- [Flask](https://flask.palletsprojects.com/en/1.1.x/)
- [SQLALCHEMY](https://www.sqlalchemy.org/)
- [Flask-CORS](https://flask-cors.readthedocs.io/)

## Setup Database

## Running the Server ## API References ### Getting Started ### Error Handling ###

**Endpoints** 

#### GET /areas

- ##### General
- \* Return a list of areas objects and number of total areas
- ##### Sample
- \* Request shell script

curl https://wastes-management.herokuapp.com/api/areas

\* Response json

```
{
"areas": [
{
"area_code": 22, "area_name": "Nattaraja Nagar", "area_size": 100.0,
"city":"Komarapalaiyam", "latitude": "342342",
"longitude": "42342"
},
{
"area_code": 33, "area_name:"Nattaraja Nagar ", "area_size": 100.0,
"city": "Komarapalaiyam",
"latitude": "45345",
"longitude": "423"
},
{
"area_code": 44,
"area_name":Vasantha Nagar
"area_size": 120.0,
"city": "Pallipalaiyam"
"latitude": "45344635",
"longitude": "423423"
```

```
}
],
"total_areas": 3
}
GET /areas/{area_code}
- ##### General
* Return a specific area object by area code
- ##### Sample
 Request shell script
curl https://wastes-management.herokuapp.com/api/areas/22
 Response json {
"area": { "area code":
22,
"area_name": "Puthur"
"area_size": 100.0,
"city": "Kolathur",
"latitude": "342342",
"longitude": "42342"
}
```

#### - ##### General

- Return a list of baskets objects based on a specific area,
- The object that return include list of baskets, total number of basket in this area
- ##### Sample
- **Request shell script**

curl https://wastes-management.herokuapp.com/api/areas/22/baskets

```
Response json
{
"baskets": [
{
"basket height": 90,
"basket_length": 40,
"basket width": 40,
"id": 6,
"latitude": "534535534",
"level": "0%", "longitude": "435345", "software_version":
"v2.0"
},
GET /areas/{area_code}/baskets
{
"basket_height": 90,
"basket_length": 40,
```

```
"basket_width": 40, "id": 7,
"latitude": "5345345",
"level": "0%",
"longitude": "5345", "software_version":
"v2.0"
},
"basket_height": 90,
"basket length": 40,
"basket_width": 40,
"id": 5,
"latitude": "534534",
"level": "83%", "longitude": "534534534",
"software_version":
"v2.0"
}
],
"total_baskets": 3
}
```

- ##### General
- Return a list of users objects based on a specific area,
- \* The object that return include list of users, total number of users in this area
- ##### Sample
- \* Request

```shell script

curl https://wastes-management.herokuapp.com/api/areas/22/users

* Response
```json

## #### POST /areas

- ####General
- \* Insert new area in the system using the submitted longitude, latitude and area code
- \* Return success message and area object if created successfully
- ####Sample
- \* Request

```
""shell script curl -X POST https://wastes-
management.herokuapp.com/api/areas -H "Content- Type:application/json" -
d '{ "area_code": 33, "longitude": 4234432, "latitude":
324242 }'
* Response
```json
{
"area": {
"area_code": 55,
"area_name": "Kolathukadu",
"area_size": 100.0,
"city": "Pallipalaiyam Agarakaram"
, "latitude": "43424",
"longitude": "423434"
},
"success": true
}
```

Get /baskets - ##### General

^{*} Return a list of baskets objects and number of total basket

```
- ##### Sample
     Request
""shell script
curl https://wastes-management.herokuapp.com/api/baskets
*
     Response
```json
"baskets": [
{
"basket_height": 90,
"basket_length": 40,
"basket_width": 40,
"id": 1,
"latitude": "42342423",
"level": "33%", "longitude":
"534534534",
"software_version":
"v1.0"
},
{
"basket height": 90,
"basket_length": 40, "basket_width": 40,
"id": 2,
```

```
"latitude": "345353535",
"level": "44%", "longitude":
"53453453",
"software_version":
"v1.0"
},
{
"basket_height": 90,
"basket length": 40,
"basket_width": 40,
"id": 3,
"latitude": "34535345", "level": "88%",
"longitude": "545353", "software_version":
"v1.0"
}
],
"total_baskets": 9
}
Get /baskets/{basket_id}
- ##### General
```

```
* return a specific basket by id
- ##### Sample
 Request
""shell script
curl https://wastes-management.herokuapp.com/api/baskets/1
 Response
```json
{
"basket": {
"basket_height":
90,
"basket_length": 40,
"basket_width": 40,
"id": 1,
"latitude": "42342423",
"level": "33%"
"longitude": "534534534",
"software_version": "v1.0"
}
}
```

```
#### GET /baskets/{basket_id}/wastes
- ####General
     Return a list of wastes object based on a specific basket,
     the object that return include basket id, wastes, total size of wastes that
generated by this basket
- ####Sample
     Request
""shell script curl https://wastes-
management.herokuapp.com/api/baskets/1/wastes
     Response
```json
"basket id": 1, "total size":
0.048,"wastes": [
"basket id": 1,
"date_of_creation": "Mon, 25 Jan 2021 18:42:35 GMT", "size": 0.016,
"type": "bio"
},
```

"basket\_id": 1,

```
"date_of_creation": "Mon, 25 Jan 2021 18:42:46 GMT",
* Response
```json
{
     "size": 0.016,
     "type": "bio"
     },
     {
     "basket_id": 1,
     "date_of_creation": "Mon, 25 Jan 2021 18:42:50 GMT",
     "size": 0.016,
     "type": "bio"
     }
}
```

POST /baskets

- ####General

* Create new basket using the submitted longitude, latitude and area code

- you can set basket height, width, length, version manually,
 Return success message and basket object if created successfully
 ####Sample
 Request
   ```shell script
  - \* Request

    ""shell script

    curl -X POST https://wastes-management.herokuapp.com/api/baskets -H

    "Content-Type:application/json" -d '{ "area\_code": 33, "longitude": 4234432,

    "latitude": 324242 }' shell script curl -X POST https://wastesmanagement.herokuapp.com/api/baskets -H "Content- Type:
    application/json" -d '{ "area\_code": 33, "longitude": 4234432, "latitude":
    324242,

    "basket\_height:120, "basket\_width": 50, "basket\_length": 50,

    "basket\_version": "v4.0" }'

    "basket\_height": 40,

    "basket\_length": 40,

    "basket\_width": 40,

    "hasket\_width": 40.
  - "basket\_length": 40,

    "basket\_width": 40,

    "id": 10,

    "latitude": "324242",

    "level": "0%", "longitude": "4234432", "software\_version":

    "v1.0"

    },

    "success": true

}

...

```
PATCH /baskets
- ####General
 Update the basket software version
 Return the number of updated baskets
- ####Sample
 Request
""shell script curl -X PATCH https://wastes-
management.herokuapp.com/api/baskets -H
"Content-Type:application/json" -d '{ "software version": "V2.0"}'
 Response json {
"baskets update": 10
}
PATCH /baskets/{basket_id}
#####General
 Update basket level by submitted basket level
 Return success message
- ####Sample
 Request
""shell script curl -X PATCH https://wastes-
management.herokuapp.com/api/baskets/1 -H "Content-
Type:application/json" -d '{ "level": 0}'
```

```
Response
```json
{
"success": true
}
#### DELETE /baskets/{basket_id}
- ####General
     Update the basket software version
     Return the number of updated baskets
- #####Sample * Request
```shell script
curl -X DELETE https://wastes-management.herokuapp.com/api/baskets/1
* Response
```json
"success": true
#### GET /users
- ##### General
```

```
* Return a list of user object
- ##### Sample
     Request
""shell script curl https://wastes-management.herokuapp.com/api/users
*
     Response
```json
"user": [
{
"Date_of_birth": null,
"email": "gobika.v@jkkn.ac.in",
"first_name": "ahemd",
"gender": "male", "last_name":
"hosam",
"user_name":
"ahmed"
},
{
"Date_of_birth": null, "email":
"mahmoudamr@gamil.com",
"first_name": "mahmoud",
"gender": "male", "last_name": "amr", "user_name":
```

```
"mahmoud2"
},
{
"Date_of_birth": null, "email": "ahemd.esmail@gamil.com",
"first_name": "ahmed",
 "gender": "male",
 "last_name": "esmail",
 "user_name":
 "ahmed2"
}
GET /users/{user_name}
- ##### General
* Return specific user object based on user_name
- ##### Sample
 Request
```shell script
```

```
*
     Response
#### GET /users
- ##### General
* Create new user by submitted user name, first name, last name, email,
password, gender * Return success message and user object
- ##### Sample
     Request
""shell script curl -X POST https://wastes-
management.herokuapp.com/api/users -H "Content- Type: application/json"
-d '{ "user_name": "ali", "first_name": "ali", "last_name":
"emad", "email": "ali.emad@gamil.com", "password": "123", "gender":
"male",
"area_code": 22 }
     Response
```json
"success":true,
"user": { "Date_of_birth":null
```

curl https://wastes-management.herokuapp.com/api/users/meladsamuel

```
"email": "ali.emad@gamil.com",
 "first_name":"ali",
 "gender":"male",
 "last_name":"emad
 ","user_name":"ali"
}
GET /vehicles
- ##### General
* Return a list of vehicles objects
- ##### Sample
 Request
```shell script curl https://wastes-management.herokuapp.com/api/vehicles
     Response
```json
• • • •
GET /vehicles/{plate_number}
```

```
- ##### General
* Return a list of vehicles objects
- ##### Sample
*
 Request
""shell script curl https://wastes-management.herokuapp.com/api/vehicles
 Response
`json
POST /vehicles
 ##### General
 Insert new vehicles in the system by submitted plate number, container
size, tank size, employee ssn
*
 Return success message and list of vehicles object
 ##### Sample
 Request
""shell script curl -X POST https://wastes-
management.herokuapp.com/api/vehicles -H
"Content-Type:application/json" -d '{"plate_number": 543, "container_size":
6.0, "tank_size": 100.0,
"employee ssn": 29854364445354}'
 Response
```json
{
```

```
"success": true, "vehicle":
ſ
"container size":
6.0,"driver": {
"SSN": 29854364445354,
"date of birth": "Sun, 11 Oct 1998 00:00:00
GMT","full_name": "محمد صابر ي مصطف",
"phone": "011432523482",
"user name": "mostafa"
},
"plate_number": 543,"tank_level": null, "tank_size":
100.0
}
1
}
```

CONCLUSION:

We learned from the analysis that effective organization of waste collection and processing can be considered at different levels: high (city) level and low (SGB) level. In most cases, the citylevel SWM systems aim to optimize waste collection processes by organizing timely garbage disposal while minimizing costs (fuel and working hours of drivers) and improving the environmental situation. As such,

the proposed SWM systems can be roughly divided into a) systems that improve internal processes and b) systems that disseminate the information by providing a holistic real-time view. A small number of studies propose economic and ecological features for the SWM system. The economic features can be either incentives (e.g., rewards) or punishments (e.g., payments) based. The ecological aspects are linked to waste segregation and measuring environmental impact. The SGB level of SWM systems focuses on various implementations of SGBs and SWM systems with SGB-related services. The primary studies present a wide variety of sensors and actuators, as well as services, based on the data provided by the sensors.

We also identified research gaps in the field of SWM systems based on our analysis of the literature. We single out the following areas: 1) optimization of the garbage collection process, reduction of labour and resource costs, increase in efficiency and comfort of citizens; 2) improvement of the ecological situation in the city; 3) increasing environmental awareness and motivation of the citizens; 4) informing city authorities: providing big picture, informing about existing problems and needs, forecasting. The main weakness of the current studies (and thus also a gap) is that none of them aims to propose a general holistic view at any level of operation. Our results on SWM stakeholders, information, and services can be used as a basis for the creation of a general system-level approach and the standardization of information syntax and semantics.

REFERENCE:

- [1] V. R. S. Cheela and B. Dubey, "Review of application of systems engi neering approaches in development of integrated solid waste management for a smart city," in *Water Resources and Environmental Engineering II*. Singapore: Springer, 2019, doi:
- 10.1007/978-981-13-2038-5_16.
- [2] Esmaeilian, B. Wang, K. Lewis, F. Duarte, C. Ratti, and S. Behdad, "The future of waste management in smart and sustainable cities: A review and concept paper," *Waste Manage.*, vol. 81, pp. 177–195, Nov. 2018, doi: 10.1016/j.wasman.2018.09.047.
- [3] K. Dhyani and N. Patel, "Smart trash monitoring and segregation system using emerging technology—A survey," in *Proc. Int. Conf. Adv. Inform. Comput. Res.*, 2019, pp. 667–674, doi: 10.1007/978-98113-3140-4_60.
- [4] M. Topaloglu, F. Yarkin, and T. Kaya, "Solid waste collection system selection for smart cities based on a type-2 fuzzy multicriteria decision technique," *Soft Comput.*, vol. 22, no. 15, pp. 4879–4890, Aug. 2018, doi: 10.1007/S00500-018-3232-8.
- [5] M. S. Chaudhari, B. Patil, and V. Raut, "IoT based waste collection management system for smart cities: An overview," in *Proc. 3rd Int. Conf. Comput. Methodologies Commun. (ICCMC)*, Mar. 2019, pp. 802–805, doi: 10.1109/ICCMC.2019.8819776.
- [6] S. Kitchenham and B. Charters, "Guidelines for performing systematic literature reviews in software engineering," Softw. Eng. Group School Comput. Sci., Math. Keele Univ. Keele, Staffs, U.K., Dept. Comput. Sci., Univ. Durham, Durham, U.K., EBSE Tech. Rep. EBSE-2007-01, 2007.

- [7] F. Shull, J. Singer, and D. I. K. Sjøberg, Eds., *Guide to Advanced Empirical Software Engineering*. London, U.K.: Springer, 2008, doi:
- 10.1007/978-1-84800-044-5_11.
- [8] J. Zeng, J. Zhang, and Y. Liu, "Blockchain based smart park: Clean ing management," in *Proc. 2nd Int. Conf. Blockchain Technol. Appl.*, Dec. 2019, pp. 53–58, doi: 10.1145/3376044.3376046.
- [9] S. Li, K. Sun, M. Qi, and J. Liu, "Design of beverage packaging identification and recycling system based on zedboard," in *Proc. 7th Int. Conf. Inf. Technol., IoT Smart City*, Dec. 2019, pp. 175–180, doi: 10.1145/3377170.3377219.
- [10] S. Faye, F. Melakessou, W. Mtalaa, P. Gautier, N. AlNaffakh, and
- D. Khadraoui, "SWAM: A novel smart waste management approach for businesses using IoT," in *Proc. 1st ACM Int. Workshop Technol. Enablers Innov. Appl. Smart Cities Communities*, Nov. 2019, pp. 38–45, doi: 10.1145/3364544.3364824.
- [11] S. K. T. Utomo, T. Hamada, and N. Koshizuka, "Low-energy smart trash bin architecture for dynamic waste collection system," in *Proc. 2nd Int. Conf. Future Netw. Distrib. Syst.*, Jun. 2018, pp. 1–7, doi: 10.1145/3231053.3231077.
- [12] P. Fedchenkov, A. Zaslavsky, and I. Sosunova, "Enabling smart waste management with sensorized garbage bins and low power data communications network," in *Proc. 7th Int. Conf. Internet Things*, Oct. 2017, pp. 1–2, doi: 10.1145/3131542.3140264.
- [13] J. Naskova, "RecycHongs: Mobile app co-design," in *Proc. ACM Conf. Companion Publication Designing Interact. Syst.*, Jun. 2017, pp.
- 337–340, doi: 10.1145/3064857.3079188.

- [14] S. Sharmin and S. T. Al-Amin, "A cloud-based dynamic waste man agement system for smart cities," in *Proc. 7th Annu. Symp. Comput. Develop.*, Nov. 2016, pp. 1–4, doi: 10.1145/3001913.3006629.
- [15] P. J. Shah, T. Anagnostopoulos, A. Zaslavsky, and S. Behdad, "A stochas tic optimization framework for planning of waste collection and value recovery operations in smart and sustainable cities," *Waste Manage.*, vol. 78, pp. 104–114, Aug. 2018.
- [16] Z. Wen, S. Hu, D. De Clercq, M. B. Beck, H. Zhang, H. Zhang, F. Fei, and J. Liu, "Design, implementation, and evaluation of an Internet of Things (IoT) network system for restaurant food waste management," *Waste Manage*., vol. 73, pp. 26–38, Mar. 2018, doi:
- 10.1016/j.wasman.2017.11.054.
- [17] V. Elia, M. G. Gnoni, and F. Tornese, "Improving logistic efficiency of WEEE collection through dynamic scheduling using simu lation modeling," *Waste Manage.*, vol. 72, pp. 78–86, Feb. 2018, doi: 10.1016/j.wasman.2017.11.016.
- [18] T. R. P. Ramos, C. S. de Morais, and A. P. Barbosa-Póvoa, "The smart waste collection routing problem: Alternative operational management approaches," *Expert Syst. Appl.*, vol. 103, pp. 146–158, Aug. 2018, doi: 10.1016/j.eswa.2018.03.001.
- [19] S. Digiesi, F. Facchini, G. Mossa, G. Mummolo, and R. Verriello, "A cyber–based DSS for a low carbon integrated waste management sys tem in a smart city," *IFAC-PapersOnLine*, vol. 48, no. 3, pp. 2356–2361, 2015, doi: 10.1016/j.ifacol.2015.06.440.
- [20] T. Anagnostopoulos, K. Kolomvatsos, C. Anagnostopoulos, A.

Zaslavsky, and S. Hadjiefthymiades, "Assessing dynamic models for high priority waste collection in smart cities," *J. Syst. Softw.*, vol. 110, pp. 178–192, Dec. 2015, doi: 10.1016/j.jss.2015.08.049.