Delivery of Sprint-2

DATE	4 November 2022
TEAM ID	PNT2022TMID24735
PROJECT NAME	SMART WASTE MANAGEMENT FOR METROPOLITAN CITIES-IOT

Code for Data Transfer from Sensors


```
#include <WiFi.h>
                                                        // library for wifi
#include < PubSubClient.h >
                                                        // library for MQTT
#include <LiquidCrystal_I2C.h>
LiquidCrystal_I2C lcd(0x27, 20, 4);
//---- credentials of IBM Accounts
#define ORG "9gbe4w"
                                                        // IBM organisation id
#define DEVICE_TYPE "SWMSMC"
                                                       // Device type mentioned in ibm watson iot platform
#define DEVICE_ID "ibmproject"
                                                       // Device ID mentioned in ibm watson iot platform
#define TOKEN "sUNA41tG6-Pq)0rk5X"
                                                       // Token
//----- customise above values -----
char\ server[] = ORG\ ".messaging.internet of things.ibmcloud.com";
                                                                   // server name
char publishTopic[] = "iot-2/evt/data/fmt/json";
char topic[] = "iot-2/cmd/led/fmt/String";
                                                                  // cmd Represent type and command is test format of strings
char authMethod[] = "use-token-auth";
                                                                  // authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
                                                                  //Client id
WiFiClient wifiClient;
                                                                 // creating instance for wificlient
PubSubClient client(server, 1883, wifiClient);
#define ECHO PIN 12
#define TRIG_PIN 13
float dist;
void setup()
Serial.begin(115200);
pinMode(LED BUILTIN, OUTPUT);
pinMode(TRIG_PIN, OUTPUT);
 pinMode(ECHO_PIN, INPUT);
//pir pin
 pinMode(4, INPUT);
//ledpins
pinMode(23, OUTPUT);
 pinMode(2, OUTPUT);
 pinMode(4, OUTPUT);
 pinMode(15, OUTPUT);
lcd.init();
lcd.backlight();
lcd.setCursor(1, 0);
lcd.print("");
```

```
wifiConnect();
 mqttConnect();
float readcmCM()
 digitalWrite(TRIG_PIN, LOW);
 delayMicroseconds(2);
 digitalWrite(TRIG_PIN, HIGH);
 delayMicroseconds(10);
 digitalWrite(TRIG_PIN, LOW);
int duration = pulseIn(ECHO_PIN, HIGH);
return duration * 0.034 / 2;
void loop()
{
lcd.clear();
 publishData();
 delay(500);
if (!client.loop())
 {
   mqttConnect();
                                                                    // function call to connect to IBM
                         -----*/
void wifiConnect()
 Serial.print("Connecting to ");
 Serial.print("Wifi");
 WiFi.begin("Wokwi-GUEST", "", 6);
 while (WiFi.status() != WL_CONNECTED)
   delay(500);
   Serial.print(".");
 Serial.print("WiFi connected, IP address: ");
Serial.println(WiFi.localIP());
void mqttConnect()
  if (!client.connected())
    Serial.print("Reconnecting MQTT client to ");
    Serial.println(server);
    while (!client.connect(clientId, authMethod, token))
      Serial.print(".");
      delay(500);
    initManagedDevice();
    Serial.println();
void initManagedDevice()
 if (client.subscribe(topic))
    Serial.println("IBM subscribe to cmd OK");
   }
  else
```

```
Serial.println("subscribe to cmd FAILED");
void publishData()
 float cm = readcmCM();
 if(digitalRead(34))
                                                                     //PIR motion detection
 {
  Serial.println("Motion Detected");
  Serial.println("Lid Opened");
  digitalWrite(15, HIGH);
}
 else
  digitalWrite(15, LOW);
if(digitalRead(34)== true)
 if(cm <= 100)
                                                                   //Bin level detection
  digitalWrite(2, HIGH);
  Serial.println("High Alert!!!,Trash bin is about to be full");
  Serial.println("Lid Closed");
  lcd.print("Full! Don't use");
  delay(2000);
  lcd.clear();
  digitalWrite(4, LOW);
  digitalWrite(23, LOW);
 else if(cm > 150 && cm < 250)
  digitalWrite(4, HIGH);
  Serial.println("Warning!!,Trash is about to cross 50% of bin level");
  digitalWrite(2, LOW);
  digitalWrite(23, LOW);
 else if(cm > 250 && cm <=400)
  digitalWrite(23, HIGH);
  Serial.println("Bin is available");
  digitalWrite(2,LOW);
  digitalWrite(4, LOW);
  delay(10000);
  Serial.println("Lid Closed");
}
else
{
 Serial.println("No motion detected");
if(cm <= 100)
digitalWrite(21,HIGH);
String payload = "{\"High Alert!!\":\"";
payload += cm;
payload += "left\" }";
Serial.print("\n");
Serial.print("Sending payload: ");
Serial.println(payload);
```

```
if (client.publish(publishTopic, (char*) payload.c_str()))
                                                             // if data is uploaded to cloud successfully, prints publish ok or prints publish failed
Serial.println("Publish OK");
if(cm <= 250)
digitalWrite(22,HIGH);
String payload = "{\"Warning!!\":\"";
payload += dist;
payload += "left\" }";
Serial.print("\n");
Serial.print("Sending distance: ");
Serial.println(cm);
if(client.publish(publishTopic, (char*) payload.c_str()))
Serial.println("Publish OK");
else
Serial.println("Publish FAILED");
}
                                                                                      //print on LCD
float inches = (cm / 2.54);
lcd.setCursor(0,0);
lcd.print("Inches");
lcd.setCursor(4,0);
lcd.setCursor(12,0);
lcd.print("cm");
lcd.setCursor(1,1);
lcd.print(inches, 1);
lcd.setCursor(11,1);
lcd.print(cm, 1);
lcd.setCursor(14,1);
delay(1000);
lcd.clear();
```

Connection Diagram

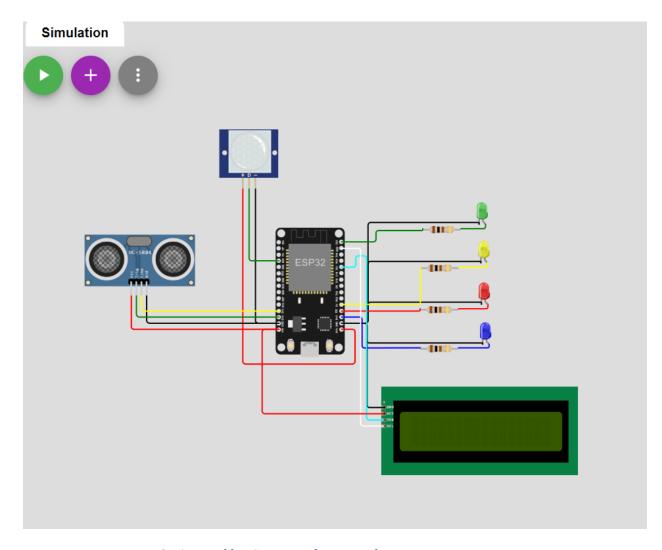

<u>Link</u>: https://wokwi.com/projects/347376419979919956