ARUNAI ENGINEERING COLLEGE

Department of Computer Science and Engineering

Smart Farmer-IOT Enabled Smart FarmingApplication

IBM NALAIYATHIRAN

SPRINT DELIVERY – 4

TITLE	**Smart Farmer-IOT Enabled Smart Farming Application**
DOMAIN NAME	INTERNET OF THINGS
TEAM ID	PNT2022TMID29459
LEADER NAME	PRIYADHARSHINI A
TEAM MEMBER NAME	SANTHANALAKSHMI S KIRUBAVATHI S JASEEMABEGUM G
MENTOR NAME	SOBHA G

Receiving commands from IBM cloud using Python program

```
import time import
sys
import ibmiotf.application
import ibmiotf.device import
random

#Provide your IBM Watson Device
Credentials
"orgId": "ck2tfo",
"typeId": "NodeMLIC",
 "deviceId": "1234"
  "token" : "87654321"

# Initialize GPIO
def   myCommandCallback(cmd):    print("Command
received: %s" % cmd.data['command'])
status=cmd.data['command']      if status=="motoron":
print ("motor is on")     elif status == "motoroff":        print
("motor is off")     else :
      print ("please send proper command")

try:
          deviceOptions = {"org": organization, "type": deviceType, "id": deviceId,
"auth-method": authMethod, "auth-token": authToken}
deviceCli = ibmiotf.device.Client(deviceOptions)
         #.....
```

```
except Exception as e:
        print("Caught exception connecting device: %s" %
str(e))sys.exit()
# Connect and send a datapoint "hello" with value "world" into the cloud as an
event of type "greeting" 10 times deviceCli.connect()


while True:
      #Get Sensor Data from
DHT11
temp=random.randint(90,110)
Humid=random.randint(60,100)
Mois=random. Randint(20,120)
   data = { 'temp' : temp, 'Humid': Humid ,
‘Mois’: Mois}
      #print data         def
myOnPublishCallback(
):
         print ("Published Temperature = %s C" % temp, "Humidity = %s %%"
%Humid, “Moisture =%s deg c” % Mois “to IBM Watson")
        success = deviceCli.publishEvent("IoTSensor", "json", data,
qos=0,on_publish=myOnPublishCallback)          if not success:
         print("Not connected to IoTF")
time.sleep(10)
      deviceCli.commandCallback = myCommandCallback #
Disconnect the device and application from the cloud
deviceCli.disconnect()
```

SMARTFARMER.PY - C:\Users\Priya\AppData\Local\Programs\Python\Python311\SMARTFARMER.PY (3.11.0)

File Edit Format Run Options Window Help

```
import time
import sys
import ibmio.application
import ibmiotf.device
import random

#provide your IBM Watson Device Credentials
organization = "ck2tfo"
deviceType = "NodeMLIC"
deviceID = "1234"
authMethod = "token"
authToken = "87654321"

#Initialize GPIO
def myCommandCallback(cmd):
    print("message received from IBM Iot Platform: %s" %cmd.data['command'])
    m=cmd.data['command']
    if(m=="motoron"):
        print("motor is switched on")
    elif(m=="motoroff"):
        print("motor is switched OFF")
    else :
 print("please send proper command")
try :
    deviceoptions = ("org": organization,"type":deviceType,"id":deviceId,"auth-method":authme
    devicecli = ibmiotf.device.client(deviceoptions)
#.............................................
```

Python 3.7.0 Shell

File Edit Shell Debug Options Window Help

```
Python 3.7.0 (v3.7.0:1bf9cc5093, Jun 27 2018, 04:59:51) [MSC v.1914 64 bit (AMD6
4)] on win32
Type "copyright", "credits" or "license()" for more information.
>>>
======== RESTART: C:\Users\ELCOT\Downloads\ibmiotpublishsubscribe.py ========
2022-11-07 20:01:24,074   ibmiotf.device.Client      INFO    Connected successfu
lly: d:157uf3:abcd:7654321
Published Moisture = 90 deg C Temperature = 96 C Humidity = 76 % to IBM Watson
Published Moisture = 102 deg C Temperature = 110 C Humidity = 68 % to IBM Watson
Published Moisture = 45 deg C Temperature = 99 C Humidity = 100 % to IBM Watson
Command received: motoron
motor is on
Published Moisture = 77 deg C Temperature = 91 C Humidity = 85 % to IBM Watson
Published Moisture = 73 deg C Temperature = 94 C Humidity = 86 % to IBM Watson
Command received: motoroff
motor is off
Published Moisture = 101 deg C Temperature = 104 C Humidity = 87 % to IBM Watson
```

Flow Chart

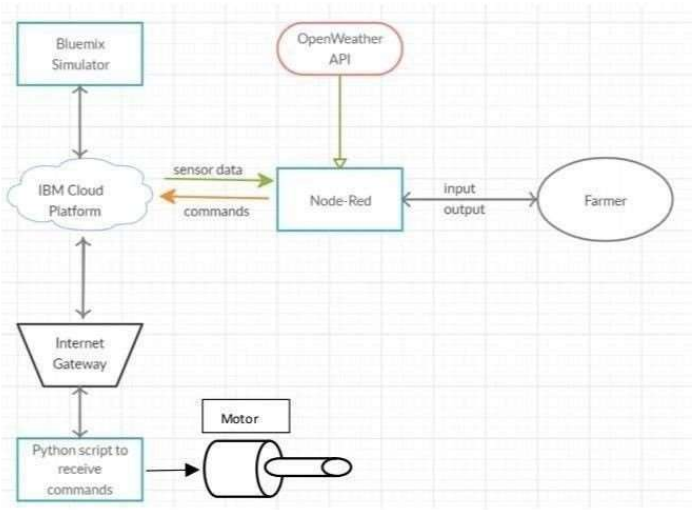

Observations & Results

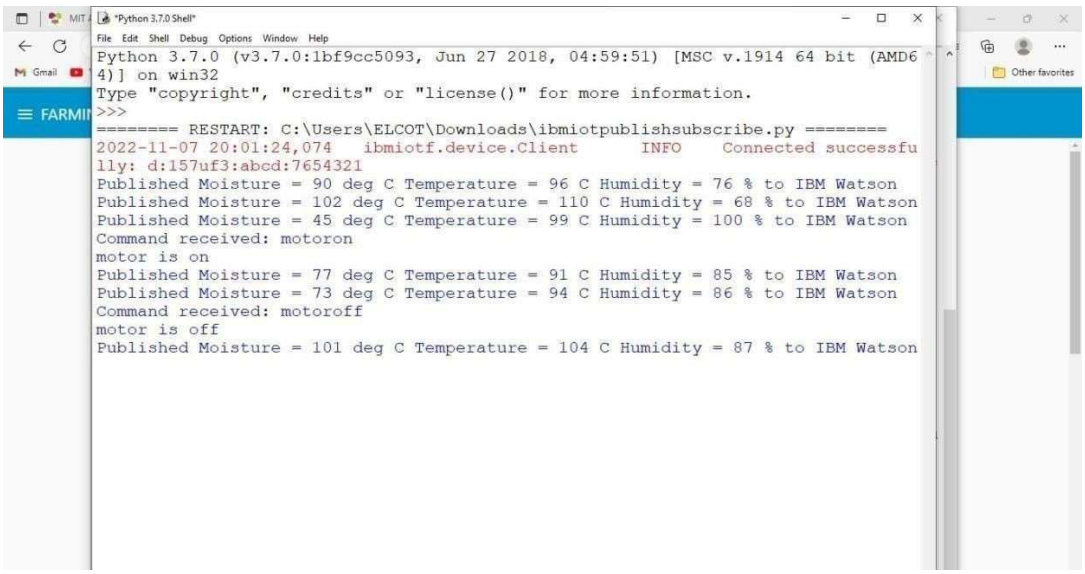

Screen3
Smart Agriculture
Temperature
60
Humidity
95
Moisture
90
MOTOR ON
MOTOR OFF

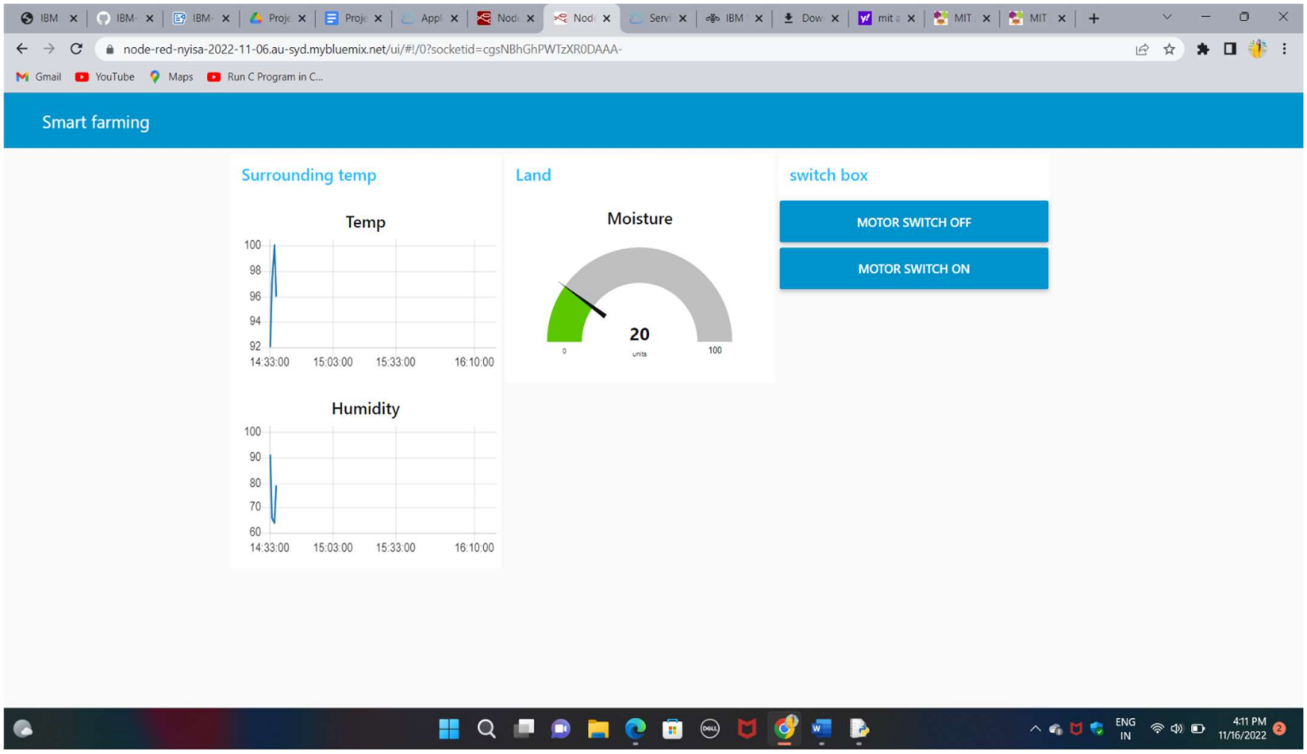
node-red-nyisa-2022-11-06.au-syd.mybluemix.net/ui/#!/0?socketid=cgsNBhGhPWTzXR0DAAA-
Gmail
YouTube
Maps
Run C Program in C...
Smart farming
Surrounding temp
Temp
100
98
96
94
92
14:33:00
15:03:00
15:33:00
16:10:00
Humidity
100
90
80
70
60
14:33:00
15:03:00
15:33:00
16:10:00
Land
Moisture
20
0
100
switch box
MOTOR SWITCH OFF
MOTOR SWITCH ON
ENG
IN
4:11 PM
11/16/2022

Advantages & Disadvantages Advantages:

- Farms can be monitored and controlled remotely.
- Increase in convenience to farmers.
- Less labor cost.
- Better standards of living.

Disadvantages:

- Lack of internet/connectivity issues.
- Added cost of internet and internet gateway infrastructure.
- Farmers wanted to adapt the use of Mobile App.

Conclusion

Thus the objective of the project to implement an IOT system in order to help farmers to control and monitor their farms has been implemented successfully.