

SIGNS WITH SMART CONNECTIVITY

FOR BETTER ROAD SAFETY

SUBMITTED BY { PNT2022TMID40718}

SWETHA R

BALAKRISHNAN D

REENA M

KEERTHANA K

ARULMOZHI K

in partial fulfillment for the award of the degree of

BACHELOR OF ENGINEERING

in

ELECTRONICS AND COMMUNICATION ENGINEERING

**JAYALAKSHMI INSTITUTE OF TECHNOLOGY
THOPPUR**

NOV 2022

BONAFIDE CERTIFICATE

Certified that this project report “**SIGNS WITH SMART CONNECTIVITY FOR BETTER ROAD SAFETY**” is the bonafide work of “**SWETHA R, BALAKRISHNAN D, REENA M, KEERTHANA K, ARULMOZHI K**” who carried out the project work under my supervision.

CONTENTS

1. INTRODUCTION

1.1Project Overview

1.2Purpose

2. LITERATURESURVEY

Existing problem

References

Problem Statement Definition

3. IDEATION & PROPOSEDSOLUTION

Empathy Map Canvas

Ideation &Brainstorming

Proposed Solution

Problem Solution fit

4. REQUIREMENTANALYSIS

Functional requirement

Non-Functional requirements

5. PROJECTDESIGN

Data Flow Diagrams

Solution & TechnicalArchitecture

User Stories

6. PROJECT PLANNING &SCHEDULING

Sprint Planning & Estimation

Sprint Delivery Schedule

Reports from JIRA

7. CODING & SOLUTIONING (Explain the features added in the project along withcode)

Feature 1

Feature 2

Database Schema (ifApplicable)

8. TESTING

Test Cases

User AcceptanceTesting

9. RESULTS

Performance Metrics

10.ADVANTAGES &DISADVANTAGES

11.CONCLUSION

12.FUTURE SCOPE 13. APPENDIX Source Code

1. Introduction:

Roads are the foremost source of linking between cities and villages. Due to the ease of traveling by road, vehicles have become the main way people travel. The chances of vehicular accidents (Vas) have increased with the growing number of vehicles on the roads. During a journey, one does not know what will happen on the next road, particularly during bad weather conditions (BWC). In such a situation, driving can be difficult due to bad visibility, which can lead to an accident. It was also noticed that in BWC, multiple vehicle collisions (MVCs) can occur owing to delays in receiving information about an incident. According to one study by the Islamabad police, there were 9582 accidents from 2016 to 2017 all over Pakistan, involving 11,317 vehicles, leading to 5047 fatalities and 12,696 persons injured

Digital technologies like the Internet of Things (IoT) are reshaping road safety measures. Many technology initiatives are undertaken the world over to make smarter and safer roads, the ones that can interact with traffic and pedestrians. Assuming that by giving in vehicle technology information to the driver, accidents can be averted, several technology-based products have been developed. The latest technology researchers are working on is based on the Internet of Things (IoT). IoT is all about data. Data is becoming a valuable resource for our world.

Many sectors and industries have adopted IoT to reduce errors and improve performance in manufacturing, energy, health care, and communication. The WHO describes different measures that can be implemented with minimal economic impacts in its “Save LIVES: Road Safety Technical Package”. A cornerstone of these steps is realizing economic systems for “monitoring road safety by strengthening data systems”. Meanwhile, a key theme in the package is motivating the adoption of a Safe System approach, which is a holistic approach to road safety that parts from traditional management solutions by emphasizing safety by design.

Mobile-phone-based applications use built-in sensor data to detect the speed limit based on environmental situations.

The main contributions of this research are

1. Abriefsurveyonthe state of the art related to pre-accident as well as post-accident models, frameworks, and techniques;

2. Identification and reporting of limitations in previous studies related to accident detection;
3. The concept of a smart road with an event-sensing capability, plus implementation and testing through various experiments;
4. Demonstration of a new and modern way to quickly detect accidents and communicate with nearby vehicles and EOCs.

The risks for loss of life, injuries, and other damage may increase if an incident is not reported to an EOC in a timely fashion. Lives can be saved by sending timely information about an accident through an automated mechanism. Moreover, quick automobile accident detection and an alert system are required to protect approaching vehicles against an MVC. Several methods have been implemented in advanced vehicles (AVs) for avoiding an accident. An accident threat is detected through sensors installed in vehicles or by using smartphone sensors. Previous researchers have used accelerometers, smoke detectors, infrared (IR) obstacle sensors, proximity sensors, and biosensors to detect an accident.

1.1. Project Overview:

The main aim of this project is to help people automate the roads by providing them with a Web App through which they can monitor the parameters of the road like temperature, speed limit, and visibility of the road. They also show guides for schools and provide services of displaying hospitals, and restaurant signs accordingly.

1.2 Purpose:

A large amount of research is being carried out in the domain of accident avoidance and accident alarms by a large number of researchers and practitioners. To avoid accidents, many approaches are utilized to enhance safety. For ease of reference, the literature on accident detection and avoidance is separated into three approaches: stand-alone, cooperative, and hybrid. Stand-alone approaches use sensors, such as radar and light detection and ranging (LiDAR), for accident avoidance and detection, whereas cooperative approaches rely on V2X technology and hybrid approaches.

2. LITERATURE SURVEY:

Abstract:

In present Systems the road signs and the speed limits are Static. But the road signs can be changed in some cases. We can consider some cases when there are road diversions due to heavy traffic or due to accidents then we can change the road signs accordingly if they are digitalized. This project proposes a system that has digital signboards on which the signs can be changed dynamically. If there is rainfall then the roads will be slippery and the speed limit would be decreased. There is a web app through which you can enter the data on road diversions, accident-prone areas, and information sign boards can be entered through the web app. This data is retrieved and displayed on the signboards accordingly

Introduction:

An automated deep learning (DL)-based system was developed for detecting accidents from video data. The system uses visual components in temporal order to represent traffic collisions. As a result, the model architecture is composed of a visual-features-extraction phase followed by transient pattern identification. Convolution and recurrent layers are used in the training phase to learn visual and temporal features. In public traffic accident datasets, an accuracy of 98% was attained in the detection of accidents, demonstrating a strong capacity for detection independent of the road structure. The solution is limited to automobile crashes, not motorbikes, bicycles, and pedestrians. Furthermore, the model makes mistakes when determining accident segments under poor illumination (e.g., at night), at low resolutions, and when there are occlusions.

An accident management system was proposed in that makes use of cellular technology in public transportation. This method enables communication across various components, including those in ambulances, RSUs, and servers. Furthermore, in this system, an optimal route-planning algorithm (ORPA) is proposed to optimize aggregate spatial utilization of road networks while lowering the travel cost to operate a vehicle. The ORPA was evaluated through simulations, and findings were compared with other current algorithms. In congested areas, the proposed method can also be used to offer fast routes for ambulances. All vehicles, including ambulances, are required to have a route indicator installed, as well as the ability to use remote correspondence. The ORPA outperformed in terms of average speed and travel duration, according to the evaluation data. The proposed system only works for predicted patterns and can fail due to the unpredicted behavior of traffic

Existingproblem:

The Safe System Approach

The Safe System (SS) approach to transport networks originated with the “Safe Road Transport System” model developed by the Swedish Transport Agency. In its essence, the approach migrates from the view that accidents are largely and automatically the driver’s fault to a view that identifies and evaluates the true causes of accidents. Through the categorization of safety into the safety of three elements (vehicle, road, and road user), SS minimizes fatalities and injuries by controlling speeds and facilitating prompt emergency response. The model has been widely adopted since its introduction and is currently motivated by the WHO as a basis for road safety planning, policy-making, and enforcement

REFERENCE:

1. World Health Organization, “Global status report on road safety 2015,”https://www.who.int/violence_injury_prevention/road_safety_status/2015/en/. View at: [GoogleScholar](#)
2. World Health Organization, “Decade ofAction for Road Safety 2011-2020 seeks to save millions of lives,”
http://www.who.int/roadsafety/decade_of_action/en/. View at: [Publisher Site](#) | [Google Scholar](#)
3. F. Wegman, “The future of road safety: A worldwide perspective,” *IATSS Research*, vol. 40, no. 2, pp. 66–71,2017.
View at: [Publisher Site](#) | [Google Scholar](#)
4. World HealthOrganization,“SaveLIVES-Aroadsafetytechnical package,”2017.
View at: [Google Scholar](#)

5. W. E. Marshall, "Understanding international road safety disparities: Why is Australia so much safer than the United States?" *Accident Analysis & Prevention*, vol. 111, pp. 251–265, 2018.
View at: [Publisher Site](#) | [Google Scholar](#)
6. "Open Street Maps, with New York County highlighted,"
<https://www.openstreetmap.org/relation/2552485>.
View at: [Google Scholar](#)
7. United States Census Bureau, "TIGER/Line® Shapefiles: Roads," <https://www.census.gov/cgibin/geo/shapefiles/index.php?year=2018&layergroup=Roads>.
View at: [Google Scholar](#)
8. X. Wang, X. Wu, M. Abdel-Aty, and P. J. Tremont, "Investigation of road network features and safety performance," *Accident Analysis & Prevention*, vol. 56, pp. 22–31, 2013.
View at: [Publisher Site](#) | [Google Scholar](#)
9. European Road Assessment Program (EuroRAP), "European Road Safety Atlas," <http://atlas.eurorap.org/>. View at: [Google Scholar](#)
10. European Road Assessment Programme (EuroRAP), "Star Ratings," <http://www.eurorap.org/protocols/star-ratings/>. View at: [Google Scholar](#)
11. International Road Assessment Programme (iRAP), "iRAP," <https://www.irap.org/>.
View at: [Google Scholar](#)
12. H. M. Hassan and H. Al-Faleh, "Exploring the risk factors associated with the size and severity of roadway crash in Riyadh," *Journal of Safety Research*, vol. 47, pp. 67–74, 2013.
View at: [Publisher Site](#) | [Google Scholar](#)

- 13.E. Ahmed, I. Yaqoob, A. Gani, M. Imran, and M. Guizani, "Internet-of-things-based smart environments: State of the art, taxonomy, and open research challenges," *IEEE Wireless Communications Magazine*, vol. 23, no. 5, pp. 10–16, 2016.
View at: [Publisher Site](#) | [Google Scholar](#)
- 14.Y. Mehmood, F. Ahmad, I. Yaqoob, A. Adnane, M. Imran, and S. Guizani, "Internet-of-Things-Based Smart Cities: Recent Advances and Challenges," *IEEE Communications Magazine*, vol. 55, no. 9, pp. 16–24, 2017. View at:
[Publisher Site](#) | [Google Scholar](#)
- 15.AARON, "GPS Logger including Gyro/Tilt/Compass & Accelerometer," <https://www.aaronia.com/products/spectrum-analyzers/gps-logger/>. View at:
[Google Scholar](#)
- 16.M. Farsi, K. Ratcliff, and M. Barbosa, "Overview of controller area network," *Computing and Control Engineering Journal*, vol. 10, no. 3, pp. 113–120, 1999. View at: [Publisher Site](#) | [Google Scholar](#)
- 17.MUNIC (company website), <https://www.munic.io/>.
- 18.Torque Pro (OBD 2 & Car), "Torque Pro (OBD2 & Car) Google Play Page," <http://goo.gl/CWD5VT>. View at: [Google Scholar](#)
- 19.J.-S. Zhou, S.-H. Chen, W.-D. Tsay, and M.-C. Lai, "The implementation of OBD-II vehicle diagnosis system integrated with cloud computation technology," in *Proceedings of the 2013 2nd International Conference on Robot, Vision and Signal Processing, RVSP 2013*, pp. 9–12, Japan, December 2013.
View at: [Google Scholar](#)
- 20.A. Mednis, A. Elsts, and L. Selavo, "Embedded solution for road condition monitoring using vehicular sensor networks," in *Proceedings of the 2012 6th International Conference on Application of Information and Communication Technologies, AICT 2012*, Georgia, October 2012. View at: [Google Scholar](#)

- 21.M.Yamada, K. Ueda, I. Horiba, and N. Sugie, “Discrimination of the Road Condition Toward Understanding of Vehicle Driving Environments,” *IEEE Transactions on Intelligent Transportation Systems*, vol. 2, no. 1, pp. 26–31, 2001.
View at: [Publisher Site](#) | [Google Scholar](#)
- 22.J.Eriksson,L.Girod,B.Hull,R.Newton,S.Madden,andH.Balakrishnan, “The pothole patrol: using a mobile sensor network for roadsurface monitoring,” in *Proceedings of the 6th International Conference on Mobile Systems, Applications, and Services (MobiSys '08)*, pp. 29–39, Breckenridge, Colo, USA, June 2008.
View at: [Publisher Site](#) | [Google Scholar](#)
- 23.M. Valentino, C. Quiligotti, and L. Carone, “Branchial cleft cyst,” *Journal of Ultrasound*, vol. 16, no. 1, pp. 17–20, 2013.
View at: [Publisher Site](#) | [Google Scholar](#)

Problem Statement Definition

A problem statement is a concise description of an issue to be addressed or a condition to be improved upon. It identifies the gap between the current (problem) state and desired (goal) state of a process or product. Focusing on the facts, the problem statement should be designed to address the [Five Ws](#). The first condition of solving a problem is understanding the problem, which can be done by way of a problem statement.

In present Systems the road signs and the speed limits are Static. But the road signs can be changed in some cases. We can consider some cases when there are road diversions due to heavy traffic or due to accidents then we can change the road signs accordingly if they are digitalized. This project proposes a system that has digital signboards on which the signs can be changed dynamically. If there is rainfall then the roads will be slippery and the speed limit would be decreased. There is a web app through which you can enter the data on road diversions, accident-prone areas, and information sign boards can be entered through the web app. This data is retrieved and displayed on the signboards accordingly.

3. IDEATION & PROPOSED SOLUTION:


Empathy MapCanvas:

Edit this template
Right-click to unlock

Empathy Map Canvas

Gain insight and understanding on solving customer problems.

1
Build empathy and keep your focus on the user by putting yourself in their shoes.

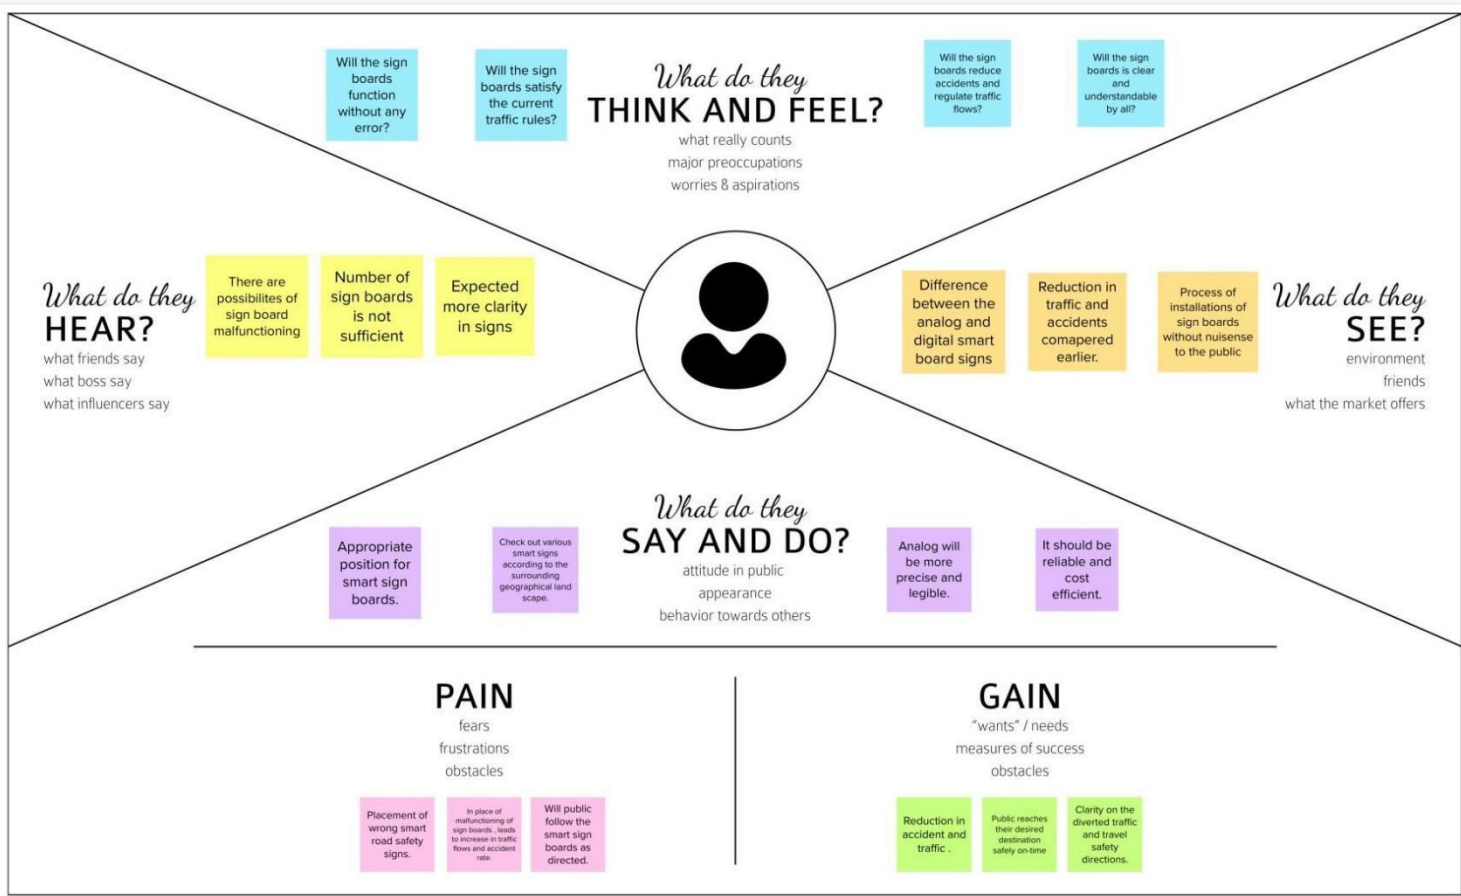

Share your feedback

Ideation & Brainstorming:

Brainstorm & idea prioritization

Use this template in your own brainstorming sessions so your team can unleash their imagination and start shaping concepts even if you're not sitting in the same room.

[View this template in context](#)
[View 10 templates](#)

Before you collaborate

A list of presentation given a long way with the session 'brain' and you need to go to get going.

[View this template in context](#)
[View 10 templates](#)

Define your problem statement

What problem are you trying to solve? Frame your problem as a clear Right to statement. This will be the focus of your brainstorm.

[View this template in context](#)
[View 10 templates](#)

Brainstorm

Write down any idea that comes to mind that addresses your problem statement.

[View this template in context](#)
[View 10 templates](#)

Group ideas

Take time sharing your ideas with others in your team or related roles as you go. Once all ideas have been grouped, give each cluster a number (the best). A cluster is bigger than six ideas, try and use 7-10 and break it up into smaller sub-groups.

[View this template in context](#)
[View 10 templates](#)

Prioritize

Your team should all be on the same page about which important ideas are important and which are feasible.

[View this template in context](#)
[View 10 templates](#)

After you collaborate

You can export the result as an image or pdf. To share with members of your company and might find it helpful.

[View this template in context](#)
[View 10 templates](#)

Signboard

Use this template in your own brainstorming sessions so your team can unleash their imagination and start shaping concepts even if you're not sitting in the same room.

[View this template in context](#)
[View 10 templates](#)

Signboard

Use this template in your own brainstorming sessions so your team can unleash their imagination and start shaping concepts even if you're not sitting in the same room.

[View this template in context](#)
[View 10 templates](#)

Signboard

Use this template in your own brainstorming sessions so your team can unleash their imagination and start shaping concepts even if you're not sitting in the same room.

[View this template in context](#)
[View 10 templates](#)

Signboard

Use this template in your own brainstorming sessions so your team can unleash their imagination and start shaping concepts even if you're not sitting in the same room.

[View this template in context](#)
[View 10 templates](#)

Signboard

Use this template in your own brainstorming sessions so your team can unleash their imagination and start shaping concepts even if you're not sitting in the same room.

[View this template in context](#)
[View 10 templates](#)

Signboard

Use this template in your own brainstorming sessions so your team can unleash their imagination and start shaping concepts even if you're not sitting in the same room.

[View this template in context](#)
[View 10 templates](#)

Proposed Solution:

The project team shall fill in the following information in the proposed solution template.

S.No.	Parameter	Description
1.	ProblemStatement(Problem to be solved)	To replace the static signboards, smart connected sign boards are used which get the speed limitations from a web app using weather API and update automatically.
2.	Idea/Solution description	Predicting the speed limit from data acquired through weather map and pass through a web user interface which in turn used by user

3.	Novelty/Uniqueness	Controllingthe speed limit by weather map.
----	--------------------	--

4.	SocialImpact/CustomerSatisfaction	Based on traffic diversion signs ,guide signs and warning signs are displayed to the public.
5.	BusinessModel(RevenueModel)	Smart connectivity and better road safety model.
6.	ScalabilityoftheSolution	Theprocessof understanding and operatingthisModeliseasy and its highly scalable with proper efficiency.

Problem Solutionfit:

Problem-Solution fit canvas 2.0			Purpose / Vision			
Define CS, fit into CC	<div>1. CUSTOMER SEGMENT(S) <small>Who is your customer? i.e. working parents of 0-5 y.o. kids</small></div> <div><ul style="list-style-type: none">Public who uses transportOfficers who maintain and regulate road safety</div>	CS	<div>6. CUSTOMER CONSTRAINTS <small>What constraints prevent your customers from taking action or limit their choices of solutions? i.e. spending power, budget, no cash, network connection, available devices.</small></div> <div><ul style="list-style-type: none">Public who have/use automobiles(any type)Government TransportThe vehicle should have digitally supported sensors which canbe compatible with the smart sign boards</div>	CC	<div>5. AVAILABLE SOLUTIONS <small>Which solutions are available to the customers when they face the problem or need to get the job done? What have they tried in the past? What pros & cons do these solutions have? i.e. pen and paper is an alternative to digital notetaking</small></div> <div><ul style="list-style-type: none">Already available analog road safety signs which are ineffectiveSigns painted on walls and roads by the corporation which disappeared or perished in a period of timeNon reliable and rigid road safety signs which gets damaged during natural disaster or calamity</div>	AS
	<div>2. JOBS-TO-BE-DONE / PROBLEMS <small>Which jobs-to-be-done (or problems) do you address for your customers? There could be more than one; explore different sides.</small></div> <div><ul style="list-style-type: none">Hard to maintain data accuracyChoosing the position of placing the smart sign boardPossibility of malfunction of sensors placed in the smart sign boardsDamage of the sign boards due to external/ internal factors</div>	J&P	<div>9. PROBLEM ROOT CAUSE <small>What is the real reason that this problem exists? What is the back story behind the need to do this job? i.e. customers have to do it because of the change in regulations.</small></div> <div><ul style="list-style-type: none">Position of static sign boards is not visible and is inappropriateThere is no way to predict the weather in the desired destination through the static boards</div>	RC	<div>7. BEHAVIOUR <small>What does your customer do to address the problem and get the job done? i.e. directly related: find the right solar panel installer, calculate usage and benefits; indirectly associated: customers spend free time on volunteering work (i.e. Greenpeace)</small></div> <div><ul style="list-style-type: none">As public use various routes for travelling, prediction of the desired routes should be on hand with the weather thereStatic boards are not reliable to find weather in the destination</div>	BE
Identify strong TR & EM	<div>3. TRIGGERS <small>What triggers customers to act? i.e. seeing their neighbour installing solar panels, reading about a more efficient solution in the news.</small></div> <div><ul style="list-style-type: none">People want to make their travel easier and comfortablePublic are aware of the traffic situations around them</div>	TR	<div>10. YOUR SOLUTION <small>If you are working on an existing business, write down your current solution first, fill in the canvas, and check how much it fits reality. If you are working on a new business proposition, then keep it blank until you fill in the canvas and come up with a solution that fits within customer limitations, solves a problem and matches customer behaviour.</small></div> <div><ul style="list-style-type: none">Connect the smart sign boards to access the applications provided by them such as speed limitations and weather predictions</div>	SL	<div>8. CHANNELS of BEHAVIOUR</div> <div>8.1 ONLINE <small>What kind of actions do customers take online? Extract online channels from #7</small></div> <div><ul style="list-style-type: none">Video tutorial is made to educate the public about the smart sign boardOnline influencers can advertise the smart sign boards through their influencing medium</div> <div>8.2 OFFLINE <small>What kind of actions do customers take offline? Extract offline channels from #7 and use them for customer development.</small></div> <div><ul style="list-style-type: none">Traffic law maker should give awareness programs to the public</div>	CH

4. REQUIREMENTANALYSIS

Functionalrequirement:

FR No.	Functional Requirement (Epic)	Sub Requirement (Story / Sub-Task)
FR-1	<u>User Visibility</u>	Sign Boards should be made with LED's which are bright colored and are capable of attracting the drivers attention but it should also not be too distracting or blinding cause it may lead to accidents.

FR-2	<u>User Need</u>	The smart sign boards should be placed frequently in places it is needed and less in places where it is not needed much to avoid confusion for the user during travel.
FR-3	<u>User Understanding</u>	For better understanding of the driver, the signs should be big, clear and legible and it can also include illustrations which will make it easily understandable to the driver.
FR-4	<u>User Convenience</u>	The display should be big enough that it should even be visible from far distance clearly.

Non-Functional requirements:


FR No.	<u>Non-Functional Requirement</u>	<u>Description</u>
NFR-1	<u>Usability</u>	It should be able to Upgrade and Update when there is a need for it.
NFR-2	<u>Security</u>	It should have good security system so that no other person is able to hack and display their own directions.
NFR-3	<u>Reliability</u>	It should be able to display to information correctly and error-free.
NFR-4	<u>Performance</u>	It should be able to automatically update itself when certain weather or traffic problem occurs.
NFR-5	<u>Availability</u>	It should be available 24/7 so that it can be beneficial to the customer i.e the driver.
NFR-6	<u>Scalability</u>	It should be able to easily change and upgrade according to change and need in requirement.

5. PROJECT DESIGN:

Project design is an early phase of the project lifecycle where ideas, processes, resources, and deliverables are planned out. A project design comes before a project plan as it's a broad overview whereas a project plan includes more detailed information.

Data Flow Diagrams:

A Data Flow Diagram (DFD) is a traditional visual representation of the information flows within a system. A neat and clear DFD can depict the right amount of the system requirement graphically. It shows how data enters and leaves the system, what changes the information, and where data is stored.

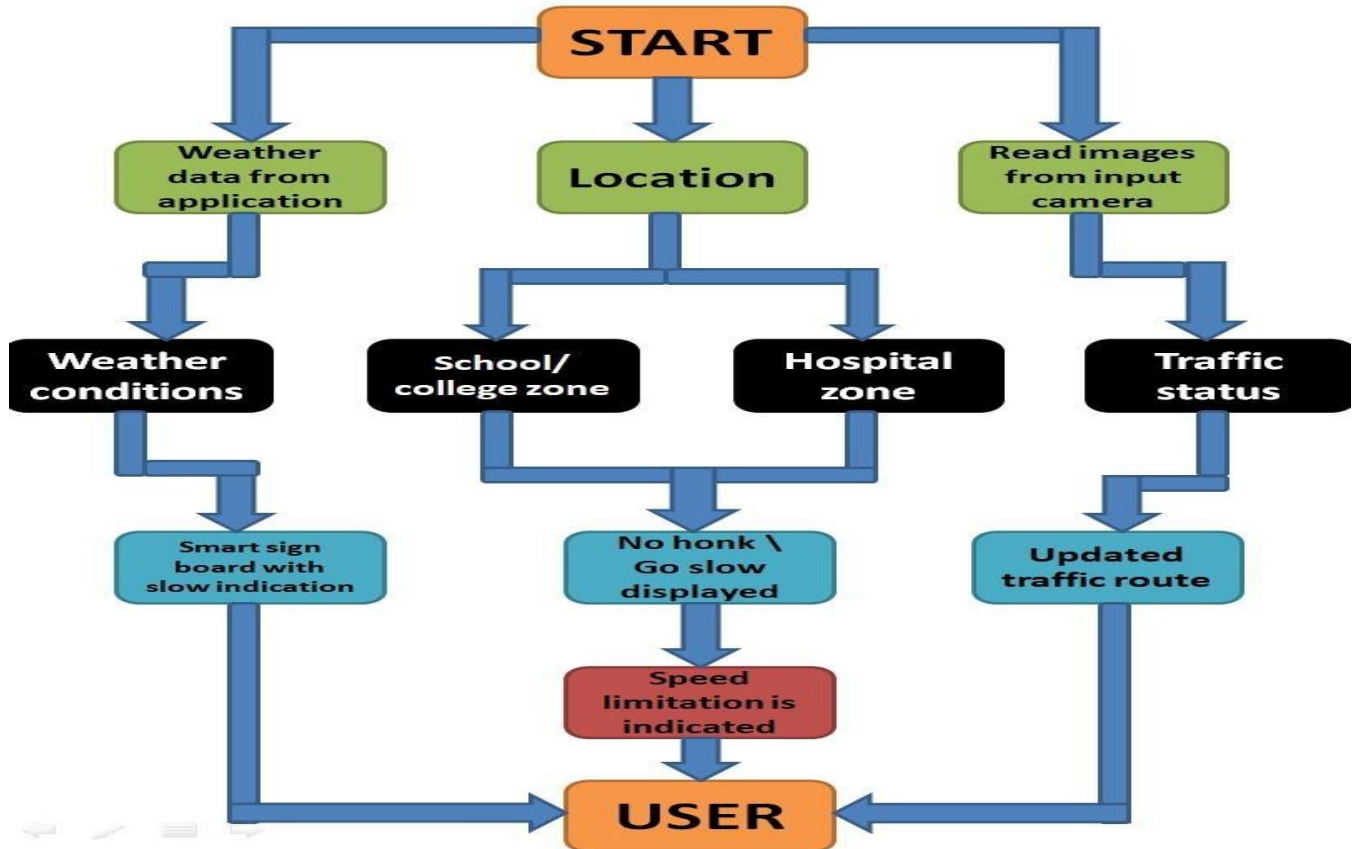


Solution & Technical Architecture:



Application




Cloud Services

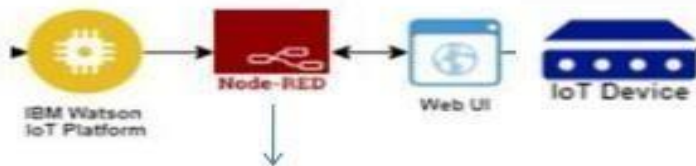

Middleware



Python Code
(random data)



Networking

Openweathermap



Sensing

6.

Userstories:

Use the below template to list all the user stories for the product.

User Type	Functional Requirement (Epic)	User Story Number	UserStory/Task	Acceptancecriteria	Priority	Release

Customer (Mobile user)	Registration	USN-1	I can get my speed limitation using weather application .	I can receive speed limitations	High	Sprint-1
		USN-2	As a user, I can register for the application by entering my email, password, and confirming my password. As a user,	I can access my account / dashboard	Medium	Sprint-2
		USN-3	As a user, I can increase or decrease my speed according to the weather change	I can increase or decrease my speed	High	Sprint-1
		USN-4	As a user, I can I get my traffic diversion signs depending on the traffic and the fatal situations.	I can access my traffic status ahead in my travel	Medium	Sprint-1
	Login	USN-5	As a user, I can log into the open weather map by entering email & password	I can access the application through my Gmail login	High	Sprint-2
	Interface	USN-6	As a user the interface should be simple and easily accessible	I can access the interface easily	High	Sprint-1
Customer (Web user)	Data generation	USN-7	As a user I use open weather application to access the data regarding the	I can access the data regarding the weather through the	High	Sprint-1
			weather changes.	application		

Administrator (Officials)	Problem solving/ Fault clearance	USN-8	As an official who is in charge for the proper functioning of the sign boards have to maintain it through periodic monitoring.	Officials can monitor the sign boards for proper functioning.	Medium	Sprint-2
			entering my email, password, and confirming my password	dashboard		

7. **PROJECT PLANNING & SCHEDULING**

The definition of a sprint is a dedicated period in which a set amount of work will be completed on a project. It's part of the agile methodology, and an Agile project will be broken down into a number of sprints, each sprint taking the project closer to completion.

Sprint Planning & Estimation:

Use the below template to create product backlog and sprint schedule

Sprint	Functional Requirement(Epic)	User Story Number	UserStory/Task	Story Points	Priority	Team Members
Sprint-1	Registration	USN-1	As a user, I can register for the application by entering my email, password, and confirming my password.	2	High	ADHITHYAN
Sprint-1		USN-2	As a user, I will receive confirmation email once I have registered for the application	1	High	ADHITHYAN
Sprint-1		USN-3	As a user, I can register for the application through Facebook	2	Low	ADHITHYAN
Sprint-1		USN-4	As a user, I can register for the application through Gmail	2	Medium	DHARUN ANTONY
Sprint-1	Login	USN-5	As a user, I can log into the application by entering email & password	1	High	DHARUN ANTONY
Sprint-1	Dashboard	USN-6	As a user, I can log into the application by entering email & password and access all the resources and services available	2	High	DHARUN ANTONY

Sprint Delivery Schedule:

Project Tracker, Velocity & Burndown Chart:

TITLE	DESCRIPTION	DATE
Literature Survey & Information Gathering	A literature review is a comprehensive summary of previous researches on the topic. The literature review surveys scholarly articles, books, and other sources relevant to a particular area of research.	3 September 2022
Prepare Empathy Map	An empathy map is a collaborative tool teams can use to gain a deeper insight into their customers. It helps us to understand the customers' pain, gain, and difficulties from their point of view.	10 September 2022

Ideation- Brainstorming	Brainstorming is a group problem-solving method that helped us together and organize various ideas and thoughts from team members.	17 September 2022
Define Problems statement	The Customer Problem Statement helps us to focus on what matters to create experiences people will love. A well-articulated customer problem statement allowed us to find the ideal solution for the challenge our customers face.	19 September 2022
Problem Solution Fit	It helped us understand and analyze all the thoughts of our customer, their choice of options, problems, root cause, behavior and emotions.	26 September 2022
Proposed solution	It helped us analyze and examine our solution more in the grounds of uniqueness, social impact, business model, scalability etc.	28 September 2022

Solution Architecture	Solution architecture is a complex process – with many sub-processes – that bridges the gap between business problems and technology solutions. It helped us understand the features and components used to complete the project.	1 October 2022
Customer journey map	It helped to analyse the various steps, interactions, goals and motivation, positives, negatives and opportunities.	7 October 2022
Solution requirements	It briefs about functional and non-functional requirements. It involves the various steps in the entire process. It also specifies features, usability, security, reliability, performance, availability and scalability.	12 October 2022
Technology stack	A tech stack is the combination of technologies a company uses to build and run an application or project. It helps us analyse and understand various technologies that need to be implemented in the project.	15 October 2022

Dataflow	A Data Flow Diagram (DFD) is a traditional visual representation of	11 October 2022
	the information flows within a system. A neat and clear DFD can depict the right amount of the system requirement graphically. It shows how data enters and leaves the system, what changes the information, and where data is stored.	
Sprint Delivery plan	Sprint Planning is an event in a scrum that defines what can be delivered in the upcoming sprint and how that work will be achieved. It helps us to organise and complete the work effectively and efficiently.	22 October 2022
Prepare milestone and activity list	Helps us understand and evaluate our progress and accuracy so far.	23 October 2022
Project Development Delivery of Sprint-1	Develop and submit the developed code by testing it.	7 November 2022

Velocity:

Imagine we have a 10-day sprint duration, and the velocity of the team is 20 (points per sprint). Let's calculate the team's average velocity (AV) per iteration unit (story points per day) **Burndown Chart:**

$$AV = \frac{\text{sprint duration}}{\text{velocity}} = \frac{20}{10} = 2$$

A burn-down chart is a graphical representation of work left to do versus time. It is often used in agile software development methodologies such as scrum. However, burn-down charts can be applied to any project containing measurable progress over time.

8.CODING & SOLUTIONING:

(Explain the features added in the project along with code):

Feature 1 (coding and result):

```
import wiotp.sdk.device
import time
import random
import ibmiotf.application
import ibmiotf.device
import requests, json
```

```
myConfig =
{
    #Configuration
    "identity": {
        "orgId": "3dpjnk",
        "typeId": "Sign_Board",
        "deviceId": "Board_1"},
    #API Key
    "auth": {
        "token": "1234567890"
    }
}
```

```
#Receiving callbacks from IBM IOT platform
def myCommandCallback(cmd):
    print("Message received from IBM IoT Platform: %s" % cmd.data['command'])
    m = cmd.data['command']
```

```
client = wiotp.sdk.device.DeviceClient(config=myConfig, logHandlers=None)
client.connect()
```

```
#OpenWeatherMap Credentials
```

```
BASE_URL = "https://api.openweathermap.org/data/2.5/weather?"
```

```
CITY = "Nagercoil"
```



```
URL = BASE_URL + "q=" + CITY + "&units=metric"+"&appid=" +  
"01df65417ab3968e3fc2a38c4aee27bb"
```

```
while True: response =  
    requests.get(URL) if  
    response.status_code == 200:  
        data = response.json() main  
        = data['main'] temperature  
        = main['temp'] humidity =  
        main['humidity'] pressure =  
        main['pressure'] report =  
        data['visibility']  
  
    #messge part  
    msg=random.randint(0,5)  
    if msg==1:  
        message="SLOW DOWN, SCHOOL IS NEAR"  
    elif msg==2: message="NEED HELP, POLICE  
STATION AHED" elif msg==3:  
        message="EMERGENCY, HOSPITAL NEARBY" elif msg==4:  
        message="DINE IN, RESTAURENT AVAILABLE" else:  
        message=""  
  
    #Speed Limit part  
  
    speed=random.randint(0,150) if  
    speed>=100:  
        speedMsg=" Limit Exceeded"  
    elif speed>=60 and speed<100:  
        speedMsg="Moderate" else:  
        speedMsg="Slow"  
  
    #Diversion part  
    sign=random.randint(0,5) if  
    sign==1: signMsg="Right  
Diversion"  
    elif sign==3: signMsg="Left  
Diversion"  
    elif sign==5:  
        signmsg="U Turn"  
    else:  
        signMsg=""
```

```

    #Visibility if temperature < 24:
    visibility="Fog Ahead, Drive Slow"
    elif temperature < 20: visibility="Bad
    Weather"
    else:
        visibility="Clear Weather"
else:
    print("Error in the HTTP request")
    myData={'Temperature':temperature, 'Message':message, 'Sign':signMsg, 'Speed':speedMsg,
'Visibility':visibility} client.publishEvent(eventId="status", msgFormat="json", data=myData,
    qos=0, onPublish=None)
#PUBLISHING TO IOT WATSON
print("Published data Successfully: %s", myData) client.commandCallback
=
myCommandCallbacktime.sleep(5) client.disconnect()

```

Output:

```
project.py - C:\Users\Madhu Sundaran Nair\OneDrive\Desktop\project.py (3.7.9)
File Edit Format Run Options Window Help

import wiotp.sdk.device
import time
import random
import ibmiotf.application
import ibmiotf.device
import requests, json

myConfig = { #Configuration
    "identity": {
        "orgId": "3d3pjk",
        "typeId": "Sign_Board",
        "deviceId": "Board_1"
    },
    $API Key
    "auth": {
        "token": "1234567890"
    }
}

#Receiving callbacks from IBM IoT platform
def myCommandCallback(cmd):
    print("Message received from IBM IoT Platform: %s" % cmd.data['command'])
    m=cmd.data['command']

client = wiotp.sdk.device.DeviceClient(config=myConfig, logHandlers=None)
client.connect()

#OpenWeatherMap Credentials
BASE_URL = "https://api.openweathermap.org/data/2.5/weather?"
CITY = "Chennai"
URL = BASE_URL + "q=" + CITY + "&units=metric"+"&appid=" + "01df65417ab3968e3fc2a38c4aee27bb"

while True:
    response = requests.get(URL)
    if response.status_code == 200:
        data = response.json()
        main = data['main']
        temperature = main['temp']
        humidity = main['humidity']
        pressure = main['pressure']
        report = data['visibility']

    #message part
    temperature=random.randint(0,100)
    msg=random.randint(0,5)
    if msg==1:
        message="SLOW DOWN, SCHOOL IS NEAR"
    elif msg==2:
        message="NEED HELP, POLICE STATION AHEAD"
    elif msg==3:
        message="EMERGENCY, HOSPITAL NEARBY"
    else:
        message="DINE IN, RESTAURANT AVAILABLE"


Python 3.7.9 Shell
File Edit Shell Debug Options Window Help


>>>
===== RESTART: C:\Users\Madhu Sundaran Nair\OneDrive\Desktop\project.py =====
2022-11-14 19:07:23.504 wiotp.sdk.device.client.DeviceClient INFO Connecte
d successfully: d:3d3pjk:Sign_Board:Board_1
Published data Successfully: %s [{"Temperature": 77, 'Message': 'SLOW DOWN, SCHOO
L IS NEAR', 'Sign': 'U Turn', 'Speed': 'Slow', 'Visibility': 'Clear Weather'}]
Published data Successfully: %s [{"Temperature": 47, 'Message': 'DINE IN, RESTAUR
ANT AVAILABLE', 'Sign': 'Right Diversion', 'Speed': 'Slow', 'Visibility': 'Clear
Weather'}]
Published data Successfully: %s [{"Temperature": 0, 'Message': 'NEED HELP, POLICE
STATION AHEAD', 'Sign': 'Left Diversion', 'Speed': 'Moderate', 'Visibility': 'Fo
g Ahead, Drive Slow'}]
Published data Successfully: %s [{"Temperature": 84, 'Message': 'NEED HELP, POLIC
E STATION AHEAD', 'Sign': 'Right Diversion', 'Speed': 'Limit Exceeded', 'Visibil
ity': 'Clear Weather'}]
Published data Successfully: %s [{"Temperature": 14, 'Message': 'DINE IN, RESTAUR
ANT AVAILABLE', 'Sign': 'U Turn', 'Speed': 'Limit Exceeded', 'Visibility': 'Fog
Ahead, Drive Slow'}]
Published data Successfully: %s [{"Temperature": 100, 'Message': 'EMERGENCY, HOSP
ITAL NEARBY', 'Sign': 'U Turn', 'Speed': 'Moderate', 'Visibility': 'Clear Weathe
r'}]
Published data Successfully: %s [{"Temperature": 55, 'Message': 'NEED HELP, POLIC
E STATION AHEAD', 'Sign': 'Right Diversion', 'Speed': 'Slow', 'Visibility': 'Clea
r Weather'}]
Published data Successfully: %s [{"Temperature": 66, 'Message': 'DINE IN, RESTAUR
ANT AVAILABLE', 'Sign': 'U Turn', 'Speed': 'Moderate', 'Visibility': 'Clear Weat
her'}]
Published data Successfully: %s [{"Temperature": 29, 'Message': 'DINE IN, RESTAUR
ANT AVAILABLE', 'Sign': 'Right Diversion', 'Speed': 'Limit Exceeded', 'Visibili
ty': 'Clear Weather'}]
Published data Successfully: %s [{"Temperature": 2, 'Message': 'DINE IN, RESTAUR
ANT AVAILABLE', 'Sign': 'Left Diversion', 'Speed': 'Slow', 'Visibility': 'Fog Ahe
ad, Drive Slow'}]
Published data Successfully: %s [{"Temperature": 93, 'Message': 'EMERGENCY, HOSPIT
AL NEARBY', 'Sign': 'Left Diversion', 'Speed': 'Moderate', 'Visibility': 'Clear
Weather'}]
Published data Successfully: %s [{"Temperature": 62, 'Message': 'EMERGENCY, HOSPIT
AL NEARBY', 'Sign': 'Left Diversion', 'Speed': 'Slow', 'Visibility': 'Clear Wea
ther'}]


Ln: 5 Col: 0
```

Feature 2: (MITAPPINVENTER):

MIT APP INVENTOR: ICON PAGE:

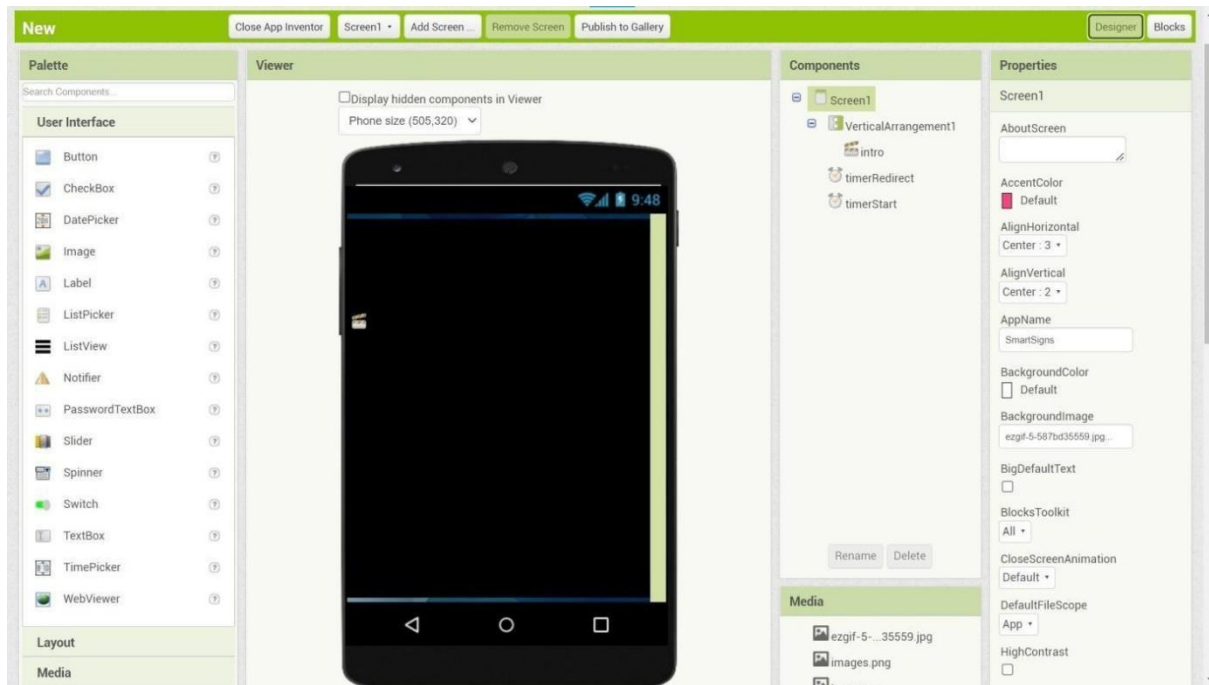

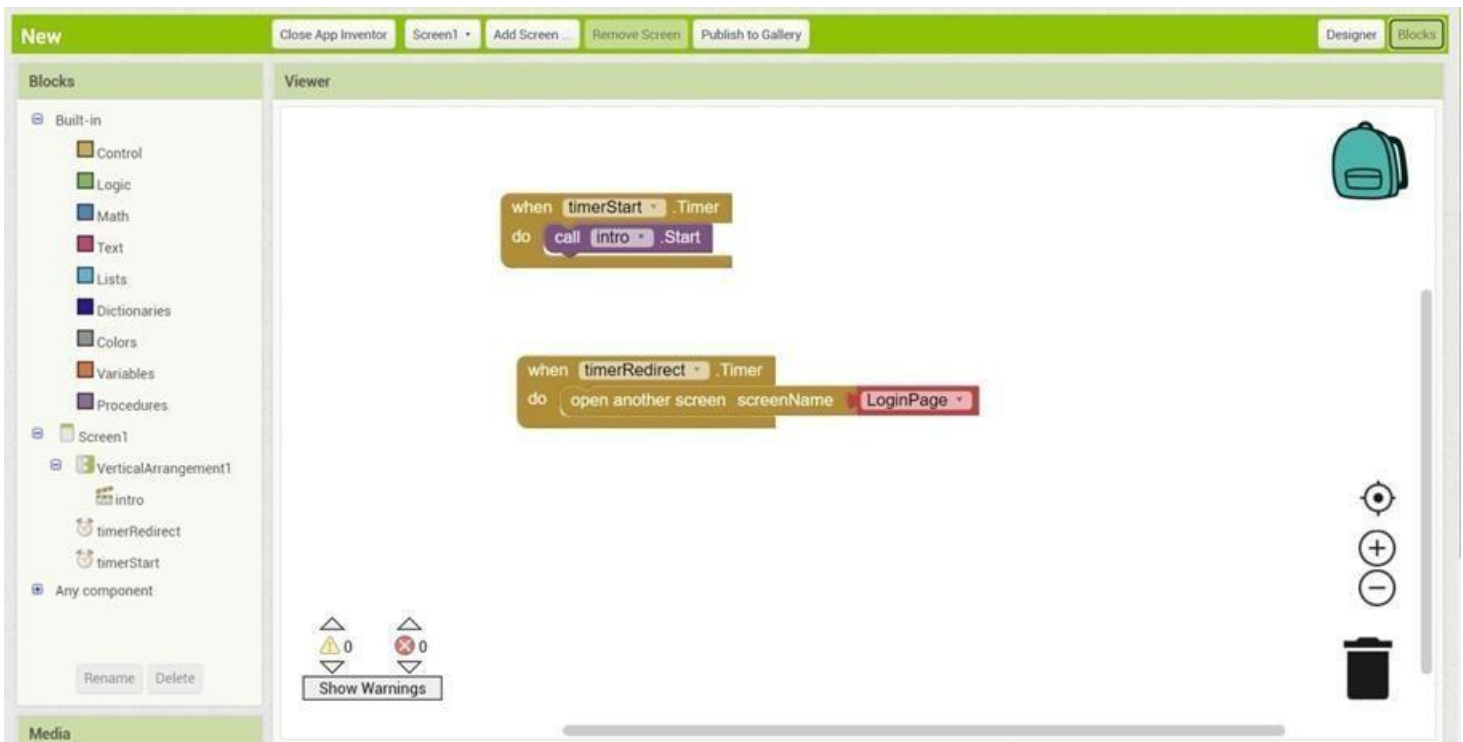

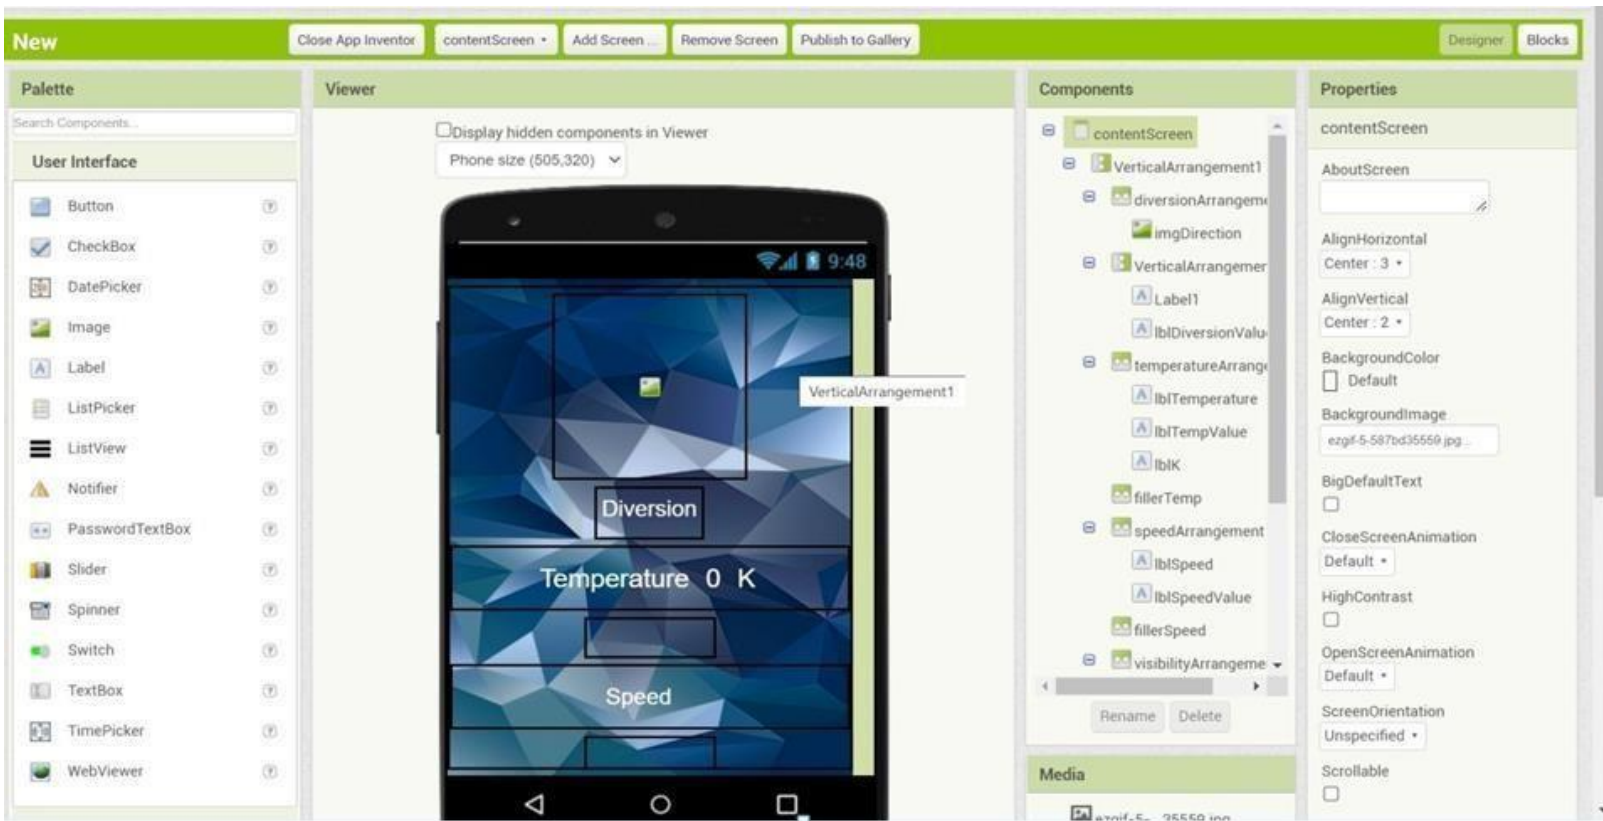

New

Close App Inventor

contentScreen ▾

Add Screen ...

Remove Screen

Publish to Gallery

Designer

Blocks

Blocks

Built-in

- Control
- Logic
- Math
- Text
- Lists
- Dictionaries
- Colors
- Variables
- Procedures


contentScreen

- VerticalArrangement1
- diversionArrangement
- imgDirection
- VerticalArrangement
- Label1
- lblDiversionValue

Rename Delete

Media

Viewer

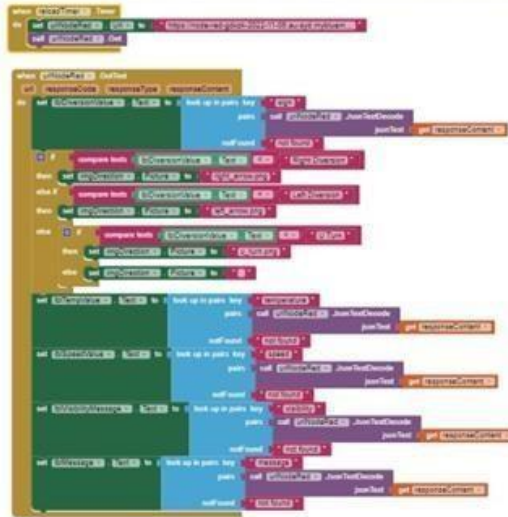



8. TESTING:

Test cases help guide the tester through a sequence of steps to validate whether a software application is free of bugs, and working as required by the end-user. Learning how to write test cases for software requires basic writing skills, attention to detail, and a good understanding of the application under test (AUT).

TestCases:

UI : <https://node-red-mlku-2022-11-04.eu-gb.mybluemix.net/ui/#!/0?socketid=45tMkCVwyfqy0tETAABh>

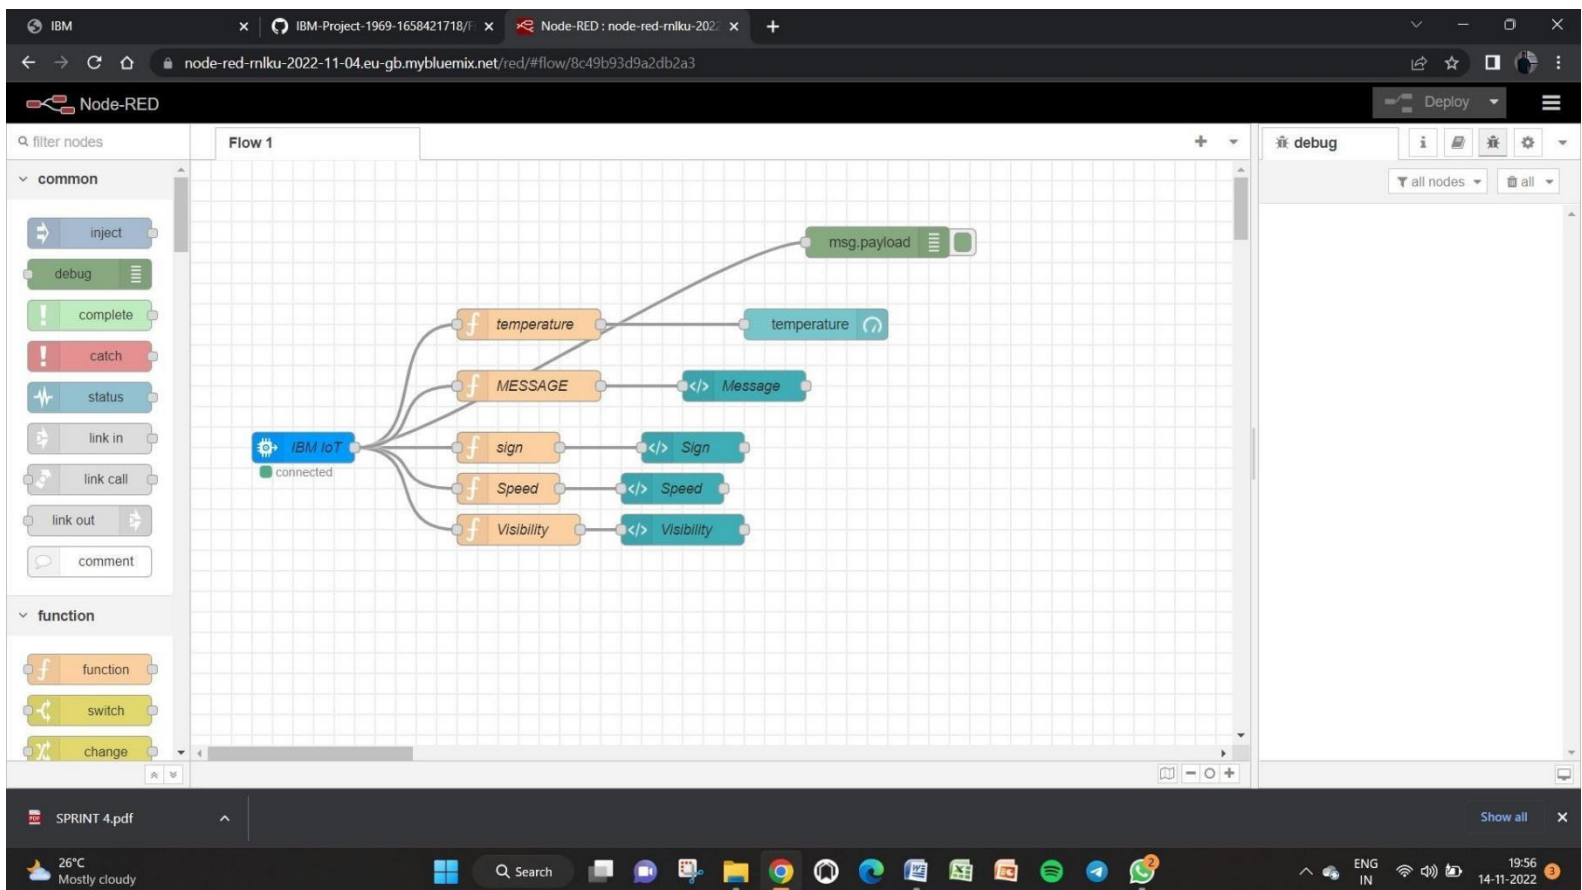

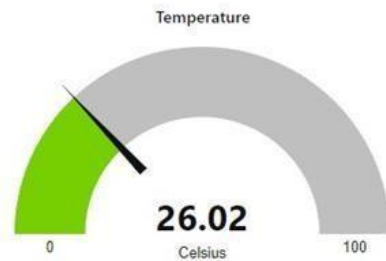

Message EMERGENCY, HOSPITAL NEARBY


sign

Speed Limit Exceeded

Visibility Clear Weather

User Acceptance Testing:


UAT consists, in practice, of people from the target audience using the application. The defects they find are then reported and fixed. This scenario is what most closely resembles “the real world.” The process allows users to “get their hands dirty” with the application. They can see if things work as intended. ■

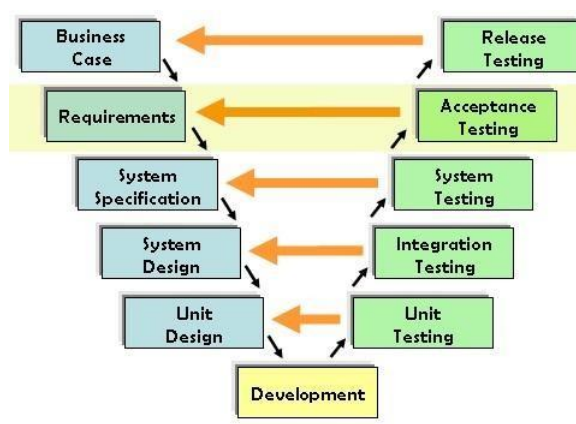

The main purpose of UAT is to validate end-to-end business flow. It does not focus on cosmetic errors, spelling mistakes, or system testing. User Acceptance Testing is carried out in a separate testing environment with a production-like data setup. It is a kind of black box testing where two or more end-users will be involved.

9. RESULTS:

PerformanceMetrics:

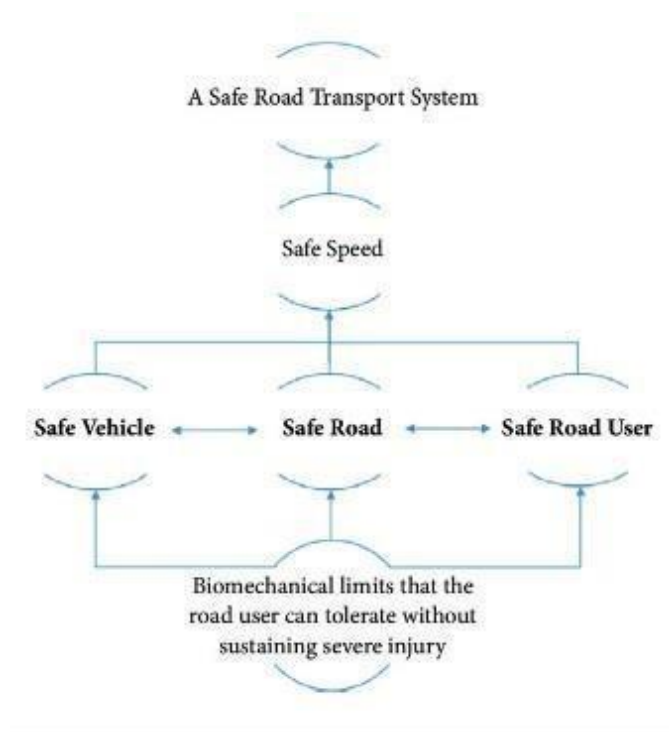

10. ADVANTAGES & DISADVANTAGES

Advantages:

Connected vehicles have various benefits such as

- Multimodal sensors and edge computing helps speed up the flow of traffic with real-time processing, reducing congestion and emissions.
- Smart road technology can assist in optimizing traffic flow
- It will manage road conditions, creating a more sustainable environment within cities.
- Improved control and safety can be achieved through IoT-enabled cars. In case of over-speeding, the notification gets displayed.
- Ensuring a safe driving experience with real-time assistance, navigation, and even monitoring driving patterns and any emergency. Additionally, along with the state of the traffic, IoT drivers can receive updated information on the state of the roads, i.e., potholes, ice, grade changes, black spots, etc.

DISADVANTAGES:

- Security and privacy. Keeping the data gathered and transmitted by IoT devices safe is challenging, as they evolve and expand in use....
- Technical complexity....
- Connectivity and power dependence....
- Integration....
- Higher costs (time and money)

CONCLUSION:

The world doesn't change on its own but we humans can change the world to be safe, better, and harmless. Since the road isn't said to be safe let's make it safer with the technologies present and available to us. The Internet of Things is one of the technologies that can lead us to travel on enhanced safe roads. So let's come together to create a better world with no accidents and a smart road for the future generation.

11. FUTURESCOPE:

IoT obtains the majority of its data with the help of connected cars. These incorporate a large number of sensors that establish communication with the cloud, other vehicles, and devices. Thanks to this it provides data and information of great utility for the improvement of road safety. The safe system approach to road safety emphasizes safety by design ensuring safe vehicles, road networks, and road users. Evolving towards the future, the road needs to be filled with advanced sensors and antenna systems to have peace with the new era.

12. APPENDIX:

Source Code:

```
import wiotp.sdk.device
import time
import random
import ibmiotf.application
import ibmiotf.device
import requests, json

myConfig = {
```

```

#Configuration
"identity": {
    "orgId": "3dpjnk",
    "typeId": "Sign_Board",
    "deviceId": "Board_1"},
#API Key
"auth": {
    "token": "1234567890"
}
}

```

```

#Receiving callbacks from IBM IOT platform
def myCommandCallback(cmd): print("Message
received from IBM IoT Platform: %s" %
cmd.data['command']) m=cmd.data['command']

```

```

client = wiotp.sdk.device.DeviceClient(config=myConfig, logHandlers=None)
client.connect()

```

```

#OpenWeatherMap Credentials
BASE_URL = "https://api.openweathermap.org/data/2.5/weather?"
CITY = "Chennai"
URL = BASE_URL + "q=" + CITY + "&units=metric" + "&appid=" +
"01df65417ab3968e3fc2a38c4aee27bb"

```

```

while True: response =
requests.get(URL) if
response.status_code == 200:
    data = response.json() main
    = data['main'] temperature
    = main['temp'] humidity =
    main['humidity'] pressure =
    main['pressure']
    report = data['visibility']

```

```

#message part
msg = random.randint(0,5)
if msg == 1:
    message = "SLOW DOWN, SCHOOL IS NEAR"
elif msg == 2: message = "NEED HELP, POLICE
STATION AHEAD" elif msg == 3:
    message = "EMERGENCY, HOSPITAL NEARBY" elif msg == 4:

```

```
message="DINE IN, RESTAURENT AVAILABLE" else:  
message=""
```

```
#Speed Limit part  
speed=random.randint(0,150) if  
speed>=100: speedMsg=" Limit  
Exceeded"  
elif speed>=60 and speed<100:  
    speedMsg="Moderate" else:  
    speedMsg="Slow"
```

```
#Diversion part  
sign=random.randint(0,5) if  
sign==1: signMsg="Right  
Diversion"  
elifsign==3: signMsg="Left  
Diversion"  
elifsign==5:  
    signmsg="U Turn" else:  
    signMsg=""
```

```
#Visibility if temperature < 24:  
visibility="Fog Ahead, Drive Slow"  
elif temperature < 20:  
    visibility="Bad Weather"  
else:  
    visibility="Clear Weather"
```

```
else:  
    print("Error in the HTTP request")  
    myData={'Temperature':temperature, 'Message':message, 'Sign':signMsg, 'Speed':speedMsg,  
'Visibility':visibility} client.publishEvent(eventId="status", msgFormat="json", data=myData,  
    qos=0, onPublish=None)  
#PUBLISHING TO IOT WATSON  
print("Published data Successfully: %s", myData) client.commandCallback  
=  
myCommandCallbacktime.sleep(5) client.disconnect()
```

GitHub Link :

<https://github.com/IBM-EPBL/IBM-Project-20834-1659764671>

Project demo link :

https://drive.google.com/file/d/1V8G8Fsgnh_4StQvZANlHgA7ijwDohVzZ/view?usp=drivesdk