
ASSIGNMENT-1

Name:- Chrysolite Joy S

Reg.No:- 110719106005

OBJECTIVE:-

Built a smart home in tinkercad. Using at least 2 sensors, led, buzzer in a circuit. Stimulate in a single code

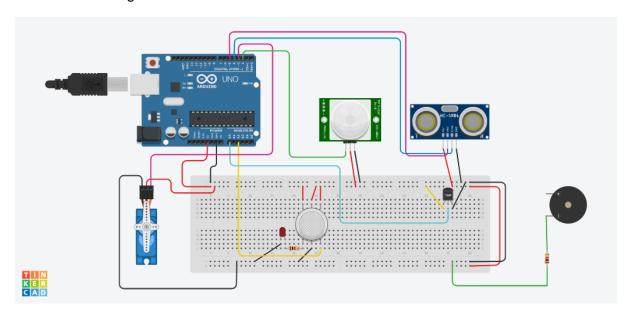

CODE:-

```
#include <Servo.h>
int sensor_state = 0;
int distance = 0;
long readUltrasonicDistance(int triggerPin, int echoPin)
{
    pinMode(triggerPin, OUTPUT); // Clear the trigger
    digitalWrite(triggerPin, LOW);
    delayMicroseconds(2);
    // Sets the trigger pin to HIGH state for 10 microseconds
    digitalWrite(triggerPin, HIGH);
    delayMicroseconds(10);
```

```
digitalWrite(triggerPin, LOW);
 pinMode(echoPin, INPUT);
 // Reads the echo pin, and returns the sound wave travel time in microseconds
 return pulseln(echoPin, HIGH);
}
Servo servo_3;
void setup()
{
 pinMode(2, INPUT);
 servo_3.attach(3, 500, 2500);
 pinMode(7, OUTPUT);
 pinMode(A2, INPUT);
}
void loop()
{
 distance = 0.01723 * readUltrasonicDistance(5, 4);
 sensor_state = digitalRead(2);
 servo_3.write(0);
 // if sensor_data is high, rotate servo motor, else
 // close it.
 if (sensor_state == HIGH) {
  servo_3.write(45);
  servo_3.write(0);
  delay(4000); // Wait for 4000 millisecond(s)
  servo_3.write(0);
  tone(7, 123, 1000); // play tone 35 (B2 = 123 Hz)
```

```
if (distance <= 100) {
    servo_3.write(80);
    tone(7, 123, 1000); // play tone 35 (B2 = 123 Hz)
    delay(4000); // Wait for 4000 millisecond(s)
    servo_3.write(0);
} else {
    servo_3.write(0);
}
if (analogRead(A2) > 350) {
    servo_3.write(90);
    tone(7, 220, 10000); // play tone 45 (A3 = 220 Hz)
    servo_3.write(0);
}
```