ASSIGNMENT NO-1


Project Name: SmartFarmer - IoT Enabled Smart Farming Application

Batch Number: B1-1M3E


Assignment Topic: smart home automation using sensor leds and buzzer

Name : KURAPATI BHARATH

Before Simulation

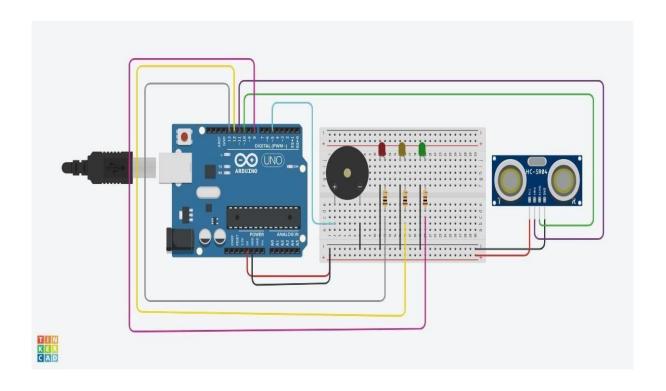

After Simulation

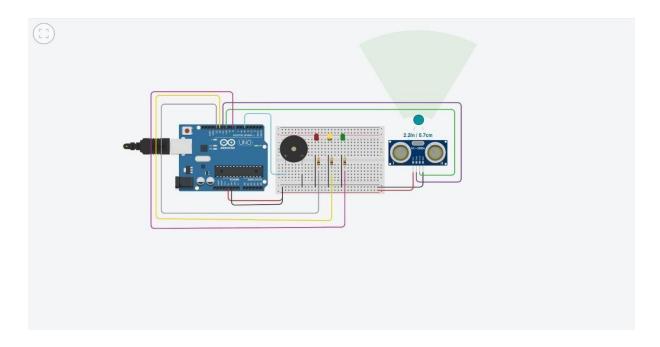

Code:

```
1 // C++ code
 2 //
 3 int distancia = 0;
 4
 5 int i = 0;
6
7
   long readUltrasonicDistance(int triggerPin, int echoPin)
 9
     pinMode(triggerPin, OUTPUT); // Clear the trigger
10
     digitalWrite(triggerPin, LOW);
11
     delayMicroseconds(2);
12
     // Sets the trigger pin to HIGH state for 10 microseconds
13
     digitalWrite(triggerPin, HIGH);
14
     delayMicroseconds (10);
15
     digitalWrite(triggerPin, LOW);
16
     pinMode(echoPin, INPUT);
17
     // Reads the echo pin, and returns the sound wave travel time i
18
     return pulseIn(echoPin, HIGH);
19
20
21 void setup()
22
23
     pinMode(8, OUTPUT);
24
     pinMode(12, OUTPUT);
     pinMode(13, OUTPUT);
25
   pinMode(5, OUTPUT);
```

```
26
     pinMode (5, OUTPUT);
27
   }
28
29 void loop()
31
     distancia = 0.01723 * readUltrasonicDistance(11, 10);
32
      if (distancia > 10) {
33
        digitalWrite(8, HIGH);
34
        digitalWrite(12, LOW);
        digitalWrite(13, LOW);
36
        digitalWrite(5, LOW);
37
        delay(200); // Wait for 200 millisecond(s)
        digitalWrite(5, LOW);
39
        delay(200); // Wait for 200 millisecond(s)
40
      } else {
41
        digitalWrite(8, LOW);
42
        digitalWrite(5, LOW);
43
44
45
     distancia = 0.01723 * readUltrasonicDistance(11, 10);
46
      if (distancia <= 10) {
47
        digitalWrite(8, LOW);
48
        digitalWrite(12, HIGH);
49
        digitalWrite(13, LOW);
50
        digitalWrite(5, HIGH);
51
        delay(200); // Wait for 200 millisecond(s)
52 ◀
```

```
51
       delay(200); // Wait for 200 millisecond(s)
52
       digitalWrite(5, LOW);
53
       delay(200); // Wait for 200 millisecond(s)
54
     } else {
55
       digitalWrite(12, LOW);
56
       digitalWrite(5, LOW);
57
58
59
     distancia = 0.01723 * readUltrasonicDistance(11, 10);
60
     if (distancia <= 5) {
61
       digitalWrite(8, LOW);
62
       digitalWrite(12, LOW);
       digitalWrite(13, HIGH);
63
       digitalWrite(5, HIGH);
64
65
       delay(100); // Wait for 100 millisecond(s)
66
       digitalWrite(5, LOW);
67
       delay(100); // Wait for 100 millisecond(s)
68
      } else {
69
       digitalWrite(13, LOW);
       digitalWrite(5, LOW);
71
   }
```