

EMERGING METHODS FOR EARLY DETECTION OF FOREST FIRE

Table of Contents

1. Introduction	3
Purpose of Document	3
Project Summary	3
Background	2
Project Scope	4
System Purpose	5
Users	5
Location	4
Responsibilities	4
Need	4
Overview of Document	4
2. Functional Objectives	5
High Priority	5
Medium Priority	5
Low Priority	6
3. Non-Functional Objectives	6
Reliability	6
Usability	6
Performance	6
Security	6
Supportability	6
Interfaces	6
4. The Context Model	7
Goal Statement	7
Context Diagram	7
System Externals	7
Customer	7
Monitoring	7
Detecting	7
Storing	8
5. The Use Case Model	8
System Use Case Diagram	8

Use Case Descriptions (for selected cases)	8
Login	8
Sign Up	9
Provide video feed	10
Select video feed	11
Logout	11
6. Appendix	12
Glossary	12

1. Introduction

Purpose of Document

This is a Requirements Specification document for Emerging methods for early detection of forest fire. This project is used to detect forest fire early so that it could reduce vulnerability of upcoming disaster. This document describes the scope, objectives and goal of the new system. In addition to describing non-functional requirements, this document models the functional requirements with use cases, interaction diagrams, and class models.

Project Summary

Project Name	:	Emerging methods for early detection of forest fire
Project Leader	:	Priya dharshini H
Project Members	:	Lavanya M
		Madhan B
		Madhan M
		Muthuklakshimi G

Background

Trees are valuable carbon repositories and play an important role for the climate. It takes decades to reforest areas ravaged by wildfires. Much of this ground lies fallow for a very long time, which takes a further toll on the climate

forest fire, uncontrolled fire occurring in vegetation more than 1.8 metres (6 feet) in height. These fires often reach the proportions of a major [conflagration](#) and are sometimes begun by

combustion and heat from surface and ground fires. A big [forest](#) fire may crown—that is, spread rapidly through the topmost branches of the trees before involving undergrowth or the

forest floor. As a result, violent blowups are common in forest fires, and they may assume the characteristics of a [firestorm](#). See [wildfire](#).

Though forest fire is often seen as harmful, a number of forests are specifically fire-adapted: the species of plants and animals native to those [ecosystems](#) are enhanced by or dependent on the occurrence of fire to persist and reproduce. [Lightning](#) strikes in a [dry forest](#) occur naturally, and fire can improve [ecosystem](#) health by reducing [competition](#), fertilizing the [soil](#) with ash, and decreasing diseases and pests. Some plant species even require fire for their seeds to germinate. In many regions that have historically experienced forest fires, such as forested areas of the western United States, years of fire exclusion and suppression in the 19th and 20th centuries allowed fuels to accumulate, altering the vegetation communities present and leading to more extreme [conflagrations](#) when fires do occur. The use of [prescribed fire](#), in which areas are burned intentionally and under controlled conditions, can restore those ecosystems and promote the conditions that were present historically prior to the removal of wildfire.

There are a number of detection and monitoring systems used by authorities. These include observers in the form of patrols or monitoring towers, aerial and satellite monitoring and increasingly promoted detection and monitoring systems based on optical camera sensors, and different types of detection sensors or their combination.

The following part presents a brief overview of automatic and semiautomatic detection and monitoring systems of fire protection in the world, experience with these systems in practical operation, and their evaluation in terms of efficiency, accuracy, versatility, and other key attributes.

The most frequently used fire detection and suppression techniques employed by authorities can be summarised as follows:

- (i) controlled burning,
- (ii) fire weather forecasts and estimates of fuel and moisture,
- (iii) watch towers,
- (iv) lightning detectors which detect the coordinates of the strike,
- (v) infrared and spotter planes
- (vi) water tankers, mobile / smart phone calls becoming increasingly common for detecting fires

Problems with the current system include

- The detection mechanism used today is like watching towers, satellite imagery, video recording over long distances, etc. However, these do not provide a solution to improve the effectiveness for the detection of forest fire
- In the case of outdoor applications, abundance of sensors is required for high accuracy of fire detection systems. Every sensor also requires large battery capacity in a large open space to keep it operate. If and only if it is close to fire, sensors detect fire, but this will damage the sensor instead

Project Scope

The scope of this project is to provide the customer an early warning system of forest fire and It delivers the alert message to customer about the fire detected using cctv or drones. Customer login or sign up the website and connect webcam links , it gives view of webcam. Event log details are stored in database and customer details are also stored in database.

System Purpose

Users

Those who will primarily benefit from the new system and those who will be affected by the new system include

Customers:

Those who will use this system to detect forest fire.

Location

The system will be available to any potential customer using the Internet. Customers may also use the system from any location.

Responsibilities

The primary responsibilities of the system:

- allow customers to connect webcam through the website
- allow access to use camera
- send alert messages to customer
- provide services to customer

Need

This system is needed in order to real-time forest fire detection and prediction approaches, with the goal of informing the local fire authorities.

Overview of Document

The rest of this document gives the detailed specifications for the new sales system. It is organized as follows:

- Section 2: Functional Objectives
Each objective gives a desired behavior for the system, a business justification, and a measure to determine if the final system has successfully met the objective. These

objectives are organized by priority. In order for the new system to be considered successful, all high priority objectives must be met.

- Section 3: Non-Functional Objectives
This section is organized by category. Each objective specifies a technical requirement or constraint on the overall characteristics of the system. Each objective is measurable.
- Section 4: Context Model
This section gives a text description of the goal of the system, and a pictorial description of the scope of the system in a context diagram. Those entities outside the system that interact with the system are described.
- Section 5: Use Case Model
The specific behavioral requirements of the system are detailed in a series of use cases. Each use case accomplishes a business task and shows the interaction between the system and some outside actor. Each use case is described with both text and an interaction diagram. An interface prototype is also shown. The system use case diagram depicts the interactions between all use cases and system actors.
- Section 6: An appendix containing a glossary that defines terms specific to this project

2. Functional Objectives

High Priority

1. The system shall take training sets of fire images and recognize whether there is a fire or the beginning of a fire (smoke) or if there is no fire
2. The system shall send a notification to the admin when it recognizes a fire in the image given
3. The system shall take real inputs of camera images and determine whether the image contains a fire or not
4. The system shall be able to take images with a variety of sizes and convert it to one fixed image to be used throughout the application.
5. The system shall run as a service on either a Windows or Linux operating system.
6. In the event that the computer on which the system is running shuts down, the system service should start automatically when the computer restarts

Medium Priority

1. The system shall provide following facility that will allow web pages that the user is permitted to access. The system must support the following facility:
 - a. Send alert message
 - b. Customer data management

Low Priority

1. The system shall allow the user's status to be stored for the next time he returns to the website. This will save the user x minutes per visit by not having to reenter already supplied data.
2. The system shall provide information about event log of forest.

3. Non-Functional Objectives

Reliability

- The system shall be completely operational at least x% of the time.
- Down time after a failure shall not exceed x hours.

Usability

- Customer should be able to use the system in his job for x days .
- A user who already knows what camera he is using should be able to connect and view that page in x seconds.

Performance

- The system should be able to support x simultaneous users.
- The mean time to view a web page over a 56Kbps modem connection shall not exceed x seconds..

Security

- The system shall provide password protected access to web pages that are to be viewed only by users.

Supportability

- The system should be able to accommodate many camera links.
- The system web site shall be viewable from chrome or any browser.

Interfaces

The system must interface with


- The cloudant db for customer and customer log information
- The acquired web site search engine

4. The Context Model

Goal Statement

The various real-time forest fire detection and prediction approaches, with the goal of informing the local fire authorities.

Context Diagram

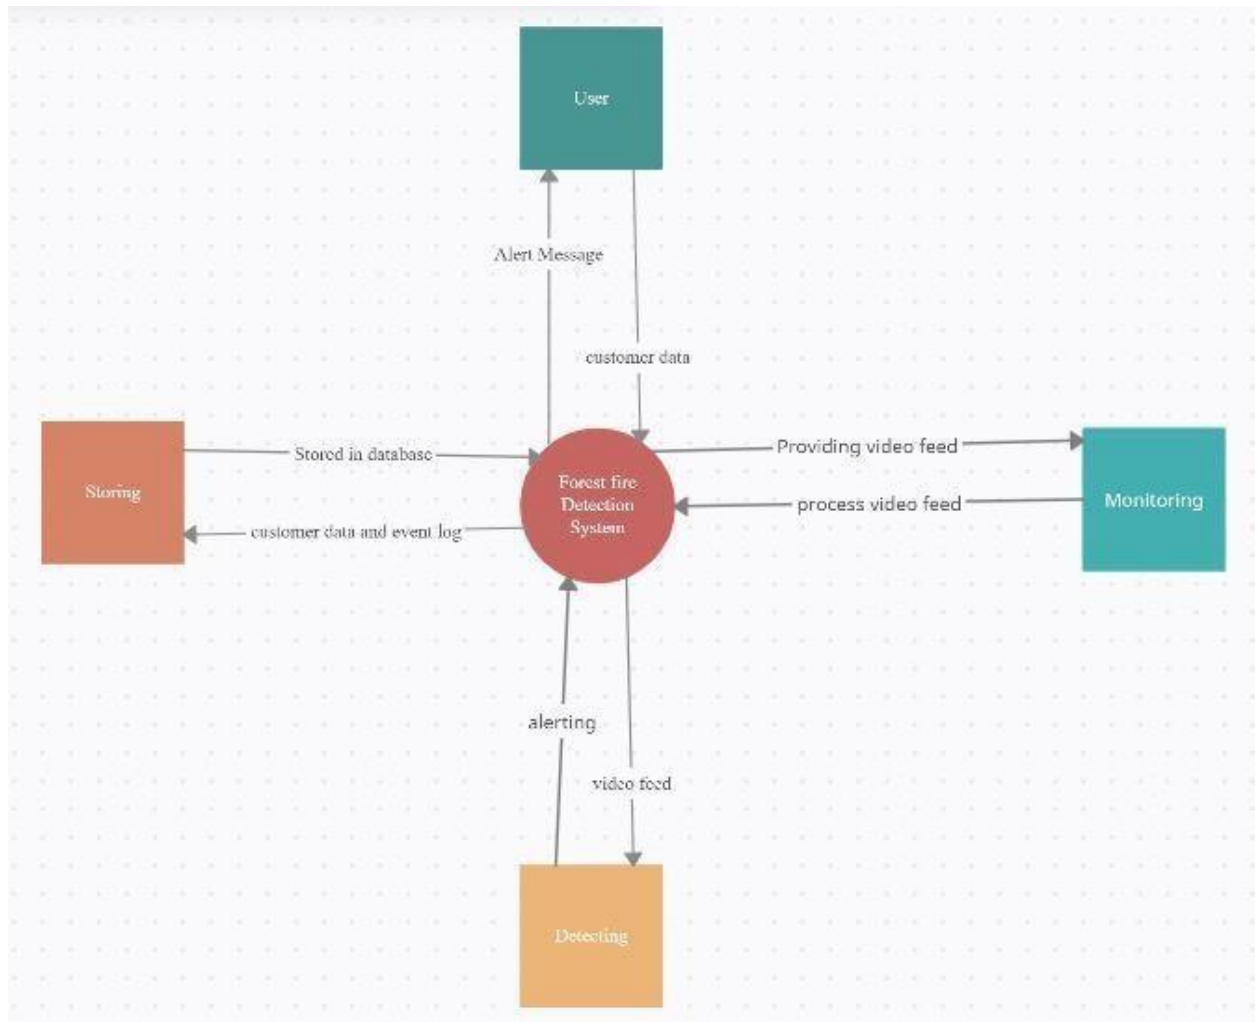

System External

Customer

A customer is any user of the system. A customer provides video feed and monitors the forest.

Monitoring

The system monitors the forest by video feed and does further processing.

Detecting


The system takes video feed and processes the feed. It sends an alert message if fire is detected.

Storing

The system stores the customer data and event log in database.

5. The Use Case Model

System Use Case Diagram

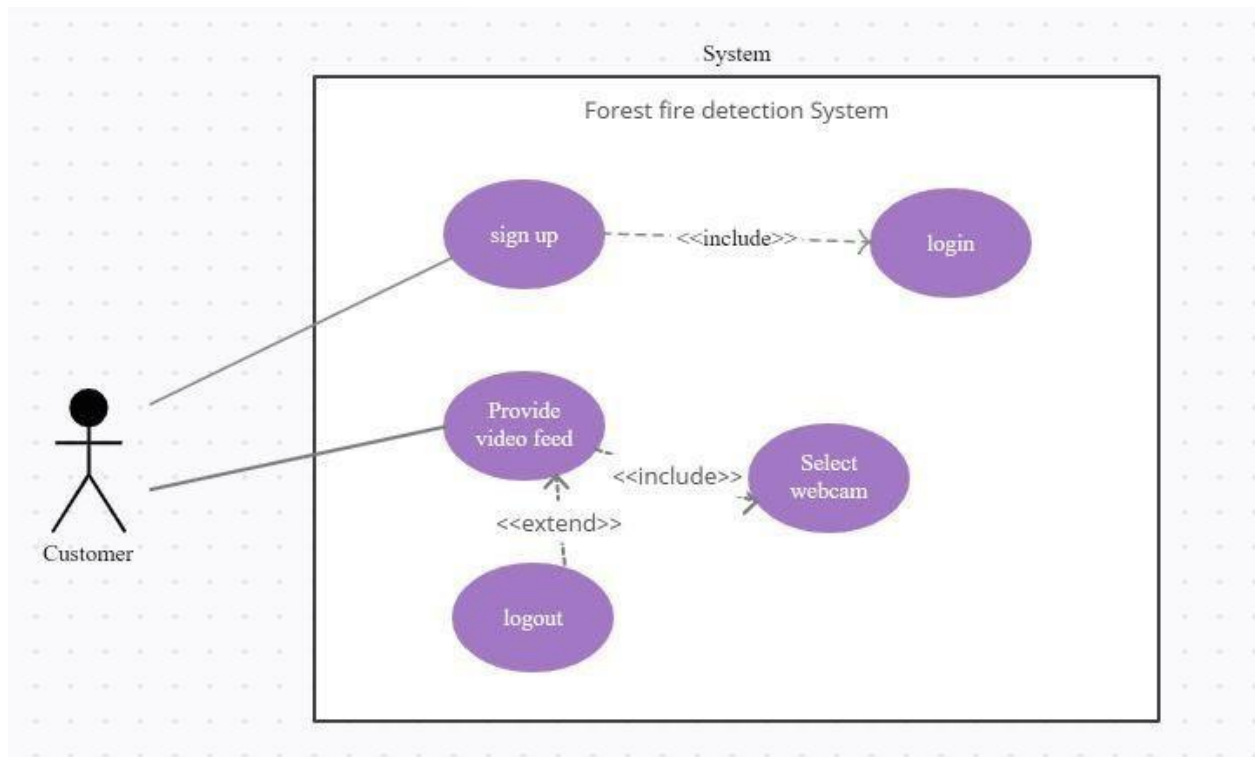

Use Case Descriptions

Notes:

- For all use cases, the user can cancel the use case at any step that requires user input. This action ends the use case. Any data collected during that use case is lost.
- For all use cases that require a logged in user, the current login session is updated during the use case to reflect the navigation paths through the use case.

Login(Sign up)

UseCaseName:	Login
Summary:	In order to get personalized or restricted information, a user must login so that the

	system can determine his access level.
Basic Flow:	<ol style="list-style-type: none"> 1. The use case starts when a user indicates that he wants to login. 2. The system requests the username and password. 3. The user enters his username and password. 4. The system verifies the username and password against all registered users. 5. The system starts a login session and displays a welcome message based on the user's preferences.
Alternative Flows:	<p>Step 4:</p> <p>if username is invalid, the use case goes back to step 2.</p> <p>Step 4:</p> <p>if the password is invalid the system requests that the user re-enter the password. When the user enters another password the use case continues with step 4 using the original username and new password.</p>
Extension Points:	login
Preconditions:	The user is registered.
Postconditions:	The user can now obtain data and perform functions according to his registered access level.
Business Rules:	Some data and functions are restricted to certain types of users or users with a particular access level.

Sign up(Customer)

UseCase Name:	Sign up
Summary:	In order to get personalized or restricted information, a new user must sign up a username and password.
Basic Flow:	<ol style="list-style-type: none"> 1. The use case start when a user indicates that he wants to register. 2. The system requests a username and password. 3. The user enters a username and password. 4. The system checks that the username does not duplicate any existing registered usernames. 5. The system requests a name (*), street, city, state, zipcode(*), phone and email address. Items marked by (*) are required. 6. The user enters the information. 7. The system determines the user's location and access level and stores all user information.

	8. The system starts a login session and displays a welcome message based on the user's preferences
Alternative Flows:	<ul style="list-style-type: none"> Step 4: If the username duplicates an existing username the system displays a message and the use case goes back to step 2. Step 5: If the user does not enter a required field, a message is displayed and the use case repeats step 4.
Extension Points:	<i>Register Preferences</i>
Preconditions:	none
Postconditions:	The user can now obtain data and perform functions according to his registered access level.
Business Rules:	<p>. Access levels are</p> <ul style="list-style-type: none"> 0: A user can access only data classification 0 1: The user can access data classification ≤ 1 2: The user can access data classification ≤ 2 <p>The default access level is 0.</p>

Provide Video feed (Customer)

Use Case Name:	Provide video feed Scenario: Customer provide video feed
Summary:	This use case allows a registered customer to provide video feed.
Basic Flow:	<ol style="list-style-type: none"> The use case start when a customer indicates he provides the feed . The customer may add or change any webcam. The system tells the customer to select the webcam. The system displays camera view.
Alternative Flows:	<p>Step 6:</p> <p>If the selected camera could not be validated, go to step 8 to get another camera.</p>
Extension	None

Preconditions:	The customer is logged in and has completed a selection of the camera
Postconditions:	The camera view is displayed.
Business Rules:	If a customer has selected correct camera.

Select video feed(Provide video feed)

Use Case Name:	Select video feed Scenario: Customer Select video feed.
Summary:	This use case allows Customer Select video feed.
Basic Flow:	<ol style="list-style-type: none"> 1. The use case starts when a customer indicates he provides the feed. 2. The customer may add or change any webcam. 3. The system tells the customer to select the webcam. 4. The system displays camera view.
Alternative Flows:	None.
Extension Points:	<i>None</i>
Preconditions:	The Customer provides video feed.
Postconditions:	The camera view is displayed.
Business Rules:	None

Logout(Customer)

Use Case Name:	Logout
Summary:	This system log out.
Basic Flow:	1. The use case allows user to logout.
Alternative Flows:	none
Extension Points:	none
Preconditions:	The system is executing use case logout.
Postconditions:	None.
Business Rules:	None

6. Appendix

Glossary

- Forest fire detection system based on wireless sensor network on IEEE paper.
- Forest fire detection system based on satellite images on IEEE paper.