

ASSIGNMENT 4

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an "Alert" to IBM cloud and display in the device recent events ?

Name:EBIN SEBASTIAN

Register Number:- 961619104019

College:MARTHANDAM COLLEGE OF ENGINEERING AND TECHNOLOGY

Code

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribtopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "ib3zmz"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32_Controller"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "ESP32"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribtopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
  Serial.begin(115200);
  pinMode(trigPin, OUTPUT);
  pinMode(echoPin, INPUT);
  wificonnect();
  mqttconnect();
}
void loop()
{
  digitalWrite(trigPin, LOW);
  delayMicroseconds(2);
  digitalWrite(trigPin, HIGH);
  delayMicroseconds(10);
  digitalWrite(trigPin, LOW);
  duration = pulseIn(echoPin, HIGH);
  distance = duration * SOUND_SPEED/2;
  Serial.print("Distance (cm): ");
  Serial.println(distance);
  if(distance<100)
  {
    Serial.println("ALERT!!");
    delay(1000);
  }
}
```

```

PublishData(distance);
delay(1000);
if (!client.loop()) {
  mqttconnect();
}
}
delay(1000);
}

void PublishData(float dist) {
  mqttconnect();
  String payload = "{\"Distance\":\"";
  payload += dist;
  payload += "\",\"ALERT!!\":\"\"Distance less than 100cms\"";
  payload += "\"}";
  Serial.print("Sending payload: ");
  Serial.println(payload);

  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");
  } else {
    Serial.println("Publish failed");
  }
}

void mqttconnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting client to ");
    Serial.println(server);
    while (!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }
    initManagedDevice();
    Serial.println();
  }
}

void wificonnect()
{
  Serial.println();
  Serial.print("Connecting to ");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.println("");
  Serial.println("WiFi connected");
  Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
}

void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}


void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic);
  for (int i = 0; i < payloadLength; i++) {
    //Serial.print((char)payload[i]);
    data3 += (char)payload[i];
  }
  Serial.println("data: "+ data3);
  data3="";
}

```

Diagram.json:

```
{
  "version": 1,
  "author": "Ebin Sebastian (Ebii)",
  "editor": "wokwi",
  "parts": [
    { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": -112.51, "left": -98.97, "attrs": {} },
    { "type": "wokwi-hc-sr04", "id": "ultrasonic1", "top": -158.43, "left": 131.74, "attrs": {} }
  ],
  "connections": [
    [ "esp:TX0", "$SerialMonitor:RX", "", [ ] ],
    [ "esp:RX0", "$SerialMonitor:TX", "", [ ] ],
    [ "esp:D18", "ultrasonic1:ECHO", "yellow", [ "h0" ] ],
    [ "ultrasonic1:VCC", "esp:VIN", "blue", [ "v223.24", "h-257.77", "v-88.67" ] ],
    [ "ultrasonic1:TRIG", "esp:D5", "yellow", [ "v0" ] ],
    [ "ultrasonic1:GND", "esp:GND.1", "black", [ "v0" ] ]
  ]
}
```

OUTPUT

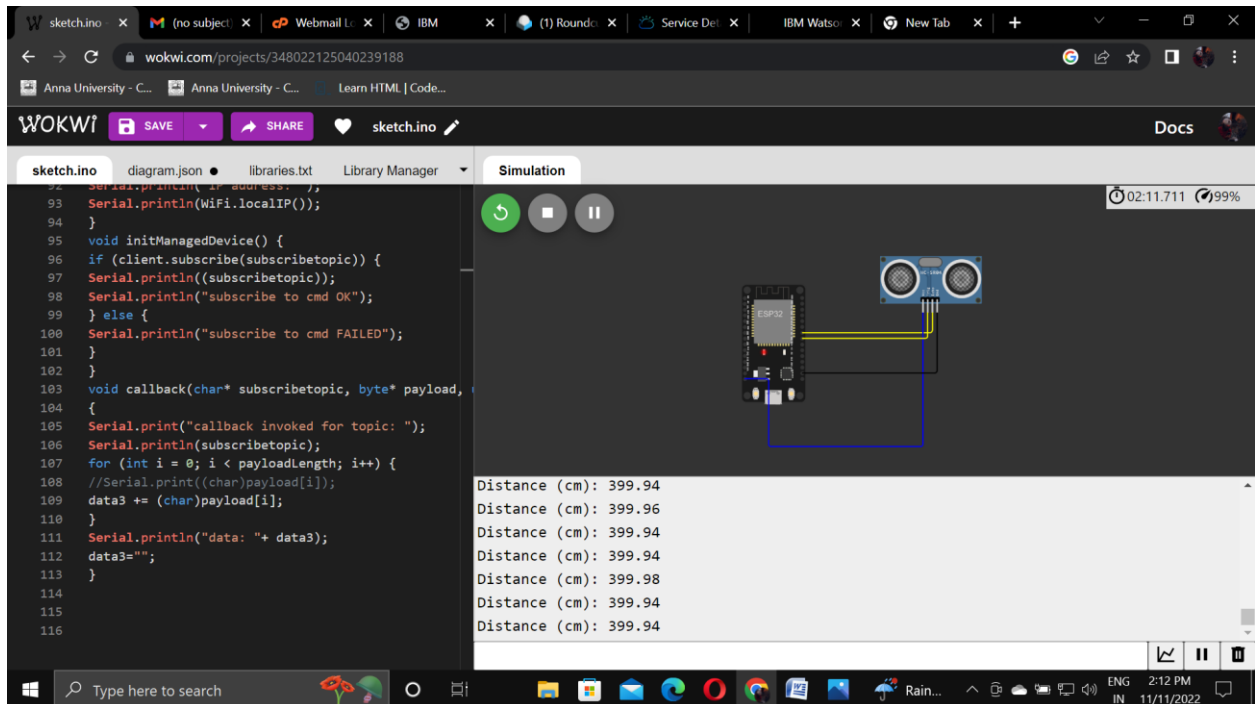

The screenshot shows the Wokwi web IDE interface. On the left, the code editor displays a sketch that initializes a managed device, subscribes to a topic, and prints distance measurements. The right side shows a simulation of the hardware, with an ESP32 DevKit connected to an HC-SR04 ultrasonic sensor. The serial monitor at the bottom right displays the output of the code, showing distance measurements in centimeters.

```
Distance (cm): 399.94
Distance (cm): 399.96
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.98
Distance (cm): 399.94
Distance (cm): 399.94
```

CLOUD OUTPUT

Recent Events

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
event_1	{"distance":7,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":8,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago

LINK

<https://wokwi.com/projects/348022125040239188>