





Real-Time River Water Quality Monitoring and Control System

Team id:PNT2022TMID08711

SUBMITTED BY

ADITYA SAGAR. P 727619BEC043 ROHITH. G 727619BEC019 SUNIL. M 727619BEC049 DHINA. L 727620BEC327

In partial fulfilment for the award of the degree of

BACHELOR OF ENGINEERING

in

ELECTRONICS AND COMMUNICATION ENGINEERING Dr. MAHALINGAM COLLEGE OF ENGINEERING AND TECHNOLOGY An Autonomous Institution Affiliated to ANNAUNIVERSITY CHENNAI – 600 025

TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
NO.		NO.
1	INTRODUCTION	
	1.1 PROJECT OVERVIEW	3
	1.2 PURPOSE	3
2	LITERATURE SURVEY	
	2.1 EXISTING PROBLEM	5
	2.2 REFERENCES	5
	2.3 PROBLEM STATEMENT DEFINITION	6
3	IDEATION & PROPOSED SOLUTION	
	3.1 EMPATHY MAP CANVAS	7
	3.2 IDEATION & BRAINSTORMING	7
	3.3 PROPOSED SOLUTION	10
	3.4 PROBLEM SOLUTION FIT	12
4	REQUIREMENT ANALYSIS	
	4.1 FUNCTIONAL REQUIREMENT	13
	4.2 NON-FUNCTIONAL REQUIREMENTS	14
5	PROJECT DESIGN	
	5.1 DATA FLOW DIAGRAMS	15
	5.2 SOLUTION & TECHNICAL ARCHITECTURE	16
	5.3 USER STORIES	19
6	PROJECT PLANNING & SCHEDULING	
	6.1 SPRINT PLANNING & ESTIMATION	20
	6.2 SPRINT DELIVERY SCHEDULE	21
	6.3 REPORTS FROM JIRA	23
7	CODING AND SOLUTIONING	
	7.1 NODE RED SERVICE ASSOCIATED WITH IBM CLOUD	25
8	TESTING	
	8.1 TEST CASES	27
0	8.2 USER ACCEPTANCE TESTING	28
9	RESULTS 1 DEDECMANCE METRICS	20
10	9.1 PERFOMANCE METRICS	29
10	ADVANTAGES & DISADVANTAGES	30
11	CONCLUSION	31
12	FUTURE SCOPE	32
13	APPENDIX	
	13.1 SOURCE CODE	33
	13.2 GIT-HUB LINK	40
	13.3 PROJECT DEMO LINK	40

1. INTRODUCTION

1.1 Project Overview:

River Water quality monitoring System

River water which is used as drinking water is a very precious commodity for all human beings. The system consists of several sensors which are used for measuring physical and chemical parameters of water. The parameters such as temperature, pH, and dissolved oxygen of the water can be measured. Using this system, a person can detect pollutants from a water body from anywhere in the world. Current water quality monitoring system is a manual system with a monotonous process and is very time-consuming This paper proposes a sensor- based water quality monitoring system. The main components of Wireless Sensor Network (WSN) include a micro-controller for processing the system, communication system for inter and intra node communication and several sensors Real-time data access can be done by using remote monitoring and Internet of Things (IoT) technology Data collected at the IBM cloud Server and verify them to trigger the actions to be performed.

1.2 Purpose:

Water quality refers to chemical, physical biological and radio logical characteristics of water. It is a measure of the condition of water relative to the necessities of one or more bio-tic species and or to any human need or purposes. Water quality monitoring is defined as a sampling and analysis of the water in lake, stream, ocean and river and conditions of the water body. Smart water quality monitoring is a process of real-time monitoring and the analysis of water to identify changes in parameters based on the physical, chemical and biological characteristics. Monitoring water quality is clearly important: in our seas, our

rivers, on the surface and in our ports, for both companies and the public. It enables us to assess how they are changing, analyze trends and to inform plans and strategies that improve water quality and ensures that water meets its designated use. There are several indicators determining water quality. These include dissolved oxygen, turbidity, bio indicators, nitrates, pH scale and water temperature. Monitoring water quality helps to identify specific pollutants, a certain chemical, and the source of the pollution. There are many sources of water pollution: wastewater from sewage seeping into the water supply; agricultural practices (e.g., the use of pesticides and fertilizer); oil pollution, river and marine dumping, port, shipping and industrial activity. Monitoring water quality and a water quality assessment regularly provides a source of data identify immediate issues – and their source.

- Identifying trends, short and long-term, in water quality.
- Data collected over a period of time will show trends, for example identifying increasing concentrations of nitrogen pollution in a river or an inland waterway. The total data will then help to identify key water quality parameters.
- Environmental planning methods: water pollution prevention and management.
- Collecting, interpreting, and using data is essential for the development of a sound and
 effective water quality strategy. The absence of real-time data will however hamper
 the development of strategies and limit the impact on pollution control. Using digital
 systems and programs for data collection and management is a solution to this
 challenge.
- Monitoring water quality is a global issue and concern: on land and at sea. Within the European Union, the European Green Deal sets out goals for restoring biological biodiversity and reducing water pollution, as well as publishing various directives to ensure standards of water quality. Individual nation states, for example France, have also clear regulatory frameworks requiring the effective monitoring of water quality. In the United States, the Environmental Protection Agency (EPA) enforces regulations to address water pollution in each state. Across the world, countries increasingly understand the importance of effective water quality monitoring parameters and methods.

2. LITERATURE SURVEY

2.1 Existing Problem:

Due to population growth, urbanization, and climatic change ,competition for water resources is expected to increase, with a particular impact on agriculture, river water. Water will be suitableness to potable water monitoring compound spillage identification done rivers, remote estimation for swimming pools. It holds self-sufficient hubs that unite with the cloud to ongoing water control. The river water needed to be treated before it is used in agriculture fields, hence the parameters affecting the quality of river-water need to be analyzed and to be used for water treatment purpose.

2.2 References:

Dr.Geetha [1]: IoT based real time water quality monitoring system using smart sensor. WQM is a cost effective and efficient system designed to monitor drinking water quality with the help of IOT(2020).

Natasha Markovic [2]: this research paper focuses on Sensor Web for River Water Pollution Monitoring and Alert System Sensor Web has provided infrastructure for collecting and processing data from distributed and heterogeneous sensors. This set of technologies has found various implementations, especially in the area of environmental monitoring. The Sensor Web architecture for crisis management, described in this paper, provides active monitoring of measuring parameters and timely responses in cases of environmental disasters. The River Water Management and Alert System built on this architecture enable access, control, and management of river water pollution.

K. A. UnnikrishnaMenon [3]: This research paper focuses on Wireless Sensor Network for River Water Quality Monitoring in India This paper introduces a river water quality monitoring system based on wireless sensor network which helps in continuous and remote monitoring of the water quality data in India. The wireless sensor node in the system is designed for monitoring the pH of water, which is one of the main parameters that affect the quality of water. Wireless sensor Network which aids in River Water Quality Monitoring. This paper also proposes a novel technique for the design of a water quality sensor node which can be used for monitoring the pH of water.

Aswinkumar [4]: This research paper focuses on Detection on water pollution and water management using smart sensors iot. To ensure the safe supply of drinking water the quality should be monitored in real time for that purpose new approach IOT (Internet of Things) based water quality monitoring has been proposed. This system consists some sensors. Which measure the water quality parameter such as pH, turbidity, conductivity, dissolved oxygen, temperature. The measured values from the sensors are processed by microcontroller and these processed values are transmitted remotely to the core controller that is raspberry pi using Zigbee protocol. Based on a study of existing water quality monitoring system and scenario of water we can say that proposed system is more suitable to monitor water quality parameters in real time.

Leonid Stoimenovet [5]: this research paper focuses on Sensor Web for River Water Pollution Monitoring and Alert System Sensor Web has provided infrastructure for collecting and processing data from distributed and heterogeneous sensors. This set of technologies has found various implementations, especially in the area of environmental monitoring. The Sensor Web architecture for crisis management, described in this paper, provides active monitoring of measuring parameters and timely responses in cases of environmental disasters. The River Water Management and Alert System built on this architecture enable access, control, and management of river water pollution.

Maneesha V. Ramehet [6]: This research paper focuses on Wireless Sensor Network for River Water Quality Monitoring in India This paper introduces a river water quality monitoring system based on wireless sensor network which helps in continuous and remote monitoring of the water quality data in India. The wireless sensor node in the system is designed for monitoring the pH of water, which is one of the main parameters that affect the quality of water. Wireless sensor Network which aids in River Water Quality Monitoring. This paper also proposes a novel technique for the design of a water quality sensor node which can be used for monitoring the pH of water.

2.3 Problem Statement:

Due to the fast-growing urbanization supply of safe drinking water is a challenge for every city authority. Water can be polluted any time.

- So, the water we reserved in the water tank at our roof top or basement in our society or apartment may not be safe. Still in India most of the people use simple water purifier that is not enough to get surety of pure water. The traditional water quality monitoring system has certain drawbacks.
- Sometimes the water has dangerous particles or chemical mixed and general-purpose water purifier cannot purify that. It relies on collecting of water samples, testing and analyses in laboratories and it's impossible to check the quality of water manually in every time.
- It results in more cost, more man power and more time. Also, it lacks capability for real-time data collections. So, an automatic real-time monitoring system is required to monitor the health of the water reserved in our water tank of the society or apartment.


So it can warn us automatically if there is any problem with the reserved water. And we can check the quality of the water anytime and from anywhere. By keeping this mind, we designed this system especially for residential areas.

3. IDEATION & PROPOSED SOLUTION

_

3.1 Empathy Map Canvas:

An empathy map is a simple, easy-to-digest visual that captures knowledge about a user's behaviors and attitudes. It is a useful tool to helps teams better understand their users. Creating an effective solution requires understanding the true problem and the person who is experiencing it. The exercise of creating the map helps participants consider things from the user's perspective along with his or her goals and challenges.

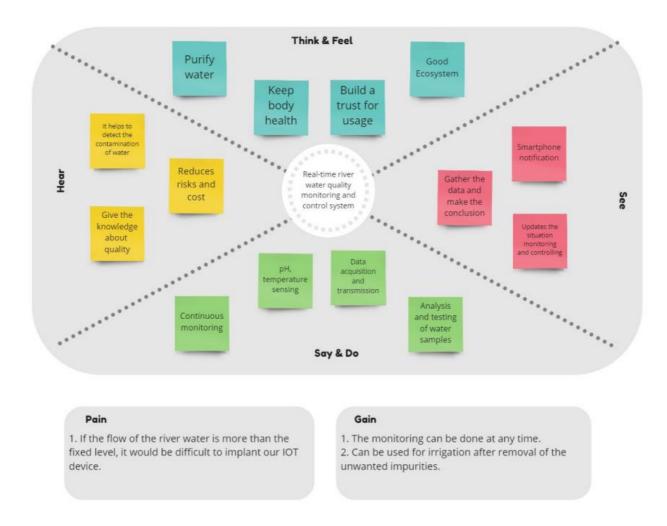



3.2 Ideation & Brainstorming:


Brainstorming provides a free and open environment that encourages everyone within a team to participate in the creative thinking process that leads to problem solving. Prioritizing volume over value, out-of-the-box ideas are welcome and built upon, and all participants are encouraged to collaborate, helping each other develop a rich amount of creative solutions.

Use this template in your own brainstorming sessions so your team can unleash their imagination and start shaping concepts even if you're not sitting in the same room.

 $Reference: \underline{https://app.mural.co/t/realtimeriverwaterqualitymon5861/m/realtimeriverwaterqualitymon5861/m/realtimeriverwaterqualitymon5861/1665483325999/6aab5ed19da9d6a9471d80b6b568330d2a499d71$

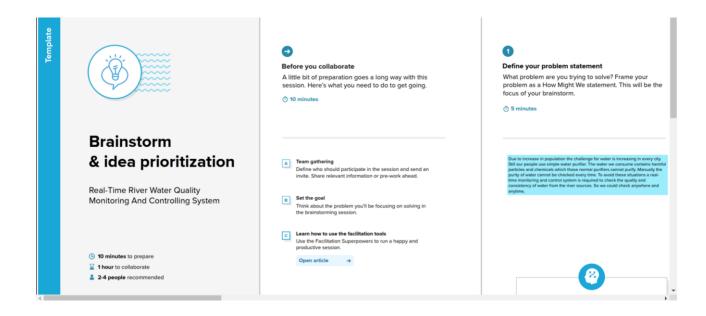

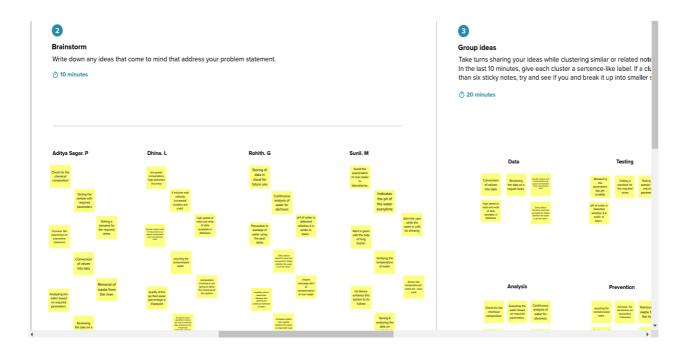

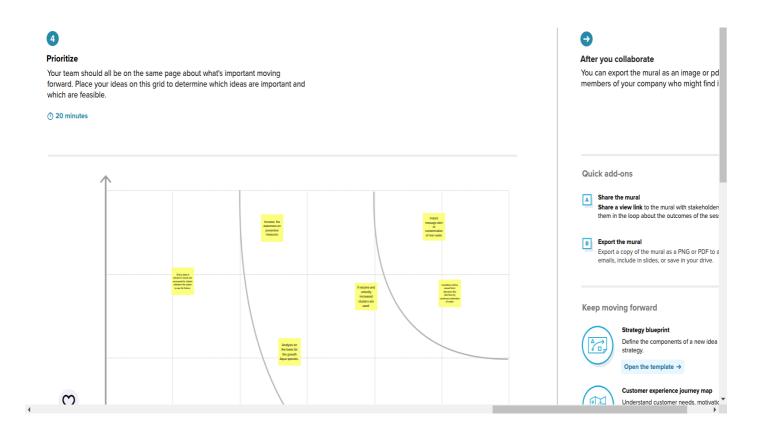

3.3 Proposed Solution:

S.No.	Parameter	Description
1.	Problem Statement (Problem to be solved)	Due to population growth, urbanization, and climatic change, competition for water resources is expected to increase, with a particular impact on agriculture, river water.
2.	Idea / Solution description	To monitor the water supply we implement IoT (Internet of Things) setup, for river water quality monitoring systems periodically checks, dust particles, temperature and PH level by sensors and notifies for public when the water quality varies.
3.	Novelty / Uniqueness	We use water detection sensor has unique advantage. It consumes less time to monitor than a manual method for checking polluted levels, and notifies immediately to reduce affected rate of pollution in water.
4.	Social Impact / Customer Satisfaction	People who are living in rural areas near to the river will be very satisfied with our idea. It will be useful to monitor water pollution in specific area. So this system prevent people from water pollution. It will be used for farming purpose to check quality water, temperature and PH level. Our Impact of this project is also create a social satisfaction for farmers too.

	Business Model	It costs low compared to another model.
	(Revenue Model)	Our real time quality monitoring model
5.		has sensors easily helps to monitor and
		predict the affected water scale easily in
		farming, drinking water, aquaculture,
		and other industries. It notifies by
		sending directly to the corporation and
		they can further notify the people to
		aware immediately. Quick actions can
		be taken. With the help of efficient use
		of mobile network, IoT and continuous
		monitoring it will be revolutionized
		model.
6.	Scalability of the Solution	Checking the river water quality for
		providing clean drinking water for the
		people, farming, promoting aquaculture,
		and other industries. It is the best
		replacement for checking water quality in
		laboratories and it is user-friendly. If we
		add more advanced sensors in future it
		can be used to monitor multiple levels in
		water. It will show continuous real time
		values in maintaining the quality of
		water.

3.4 PROBLEM SOLUTION:

Problem-Solution fit canvas 2.0 Purpose / Vision 8. AVAILABLE SOLUTIONS 5. CUSTOMER CONSTRAINTS CC 1. CUSTOMER SEGMENT(S) > The technology develops a means to supervise Sensors are used > Aqua ponics and track river water in real time so that Compact in size Dam safety organisation (SDSO) quality and flow can be maintained to use less > Consumes low power > Wholesaler of mineral water electricity and deliver at a lower cost > The device will be small and simple to operate and cons is Device use without sufficient network connection 9. BEHAVIOUR 6. PROBLEM ROOT CAUSE 2. JOBS-TO-BE-DONE / PROBLEMS > To recognise the tank's algae growth. It involves improper upkeep of the water checks the PH level, mineral content, supply and inappropriate upkeep of the > To control the flow of water using IOT temperature, water flow direction, and people. > To identify the ph value and mineral content in water quantity. > Lack of system administration and the water > These are portable and are easily upkeep is the problem. > To identify the presents of algal bloom in the maintainable. It uses a lot of electricity. tank or water bodies > It uses less data and > The quality , quantity and temperature of the power.Additionally, it might serve as a water can be maintained reference for the best safety steps to CH 10. CHANNELS of BEHAVIOUR SL 7. YOUR SOLUTION TR 3. TRIGGERS > They are able to recognise the issue with The system finds a way for supervising and > The cloud storage can be used to the water without anyone's assistance. monitoring the real time river water so that regulate water flow. It uses little energy and is small in size. quality & flow can be maintained Customers will find it easy to use > To consume less powerconsumption and to OFFLINE provide in cheaper cost 4. EMOTIONS: BEFORE / AFTER EM The proposed system includes a number of > The device will be in compact size and user Before :Anxity,time consumption and unaware of sensors to test and guarantee the water's quality friendly to use based on factors including pH, temperature, After:aware of things ,less time consumption and conductivity, turbidity, and ardunio. pleasure

4. REQUIREMENT ANALYSIS

4.1 Functional Requirements:

Following are the functional requirements of the proposed solution.

FR No.	Functional Requirement	Sub Requirement (Story / Sub-Task)
	(Epic)	
FR-1	User Registration	Registration through Form Registration through Gmail Registration through Linkedin
FR-2	User Confirmation	Confirmation via Email Confirmation via OTP
FR-3	Ultrasonic generator	Periodically the waves are generated to destroy algae in the range of 25%,50%,100%
FR-4	Ph level detection	To observe the water quality, Ph sensor is used and the signals are conveyed to the Arduino.
FR-5	Turbidity detection	Turbidity sensor measures the purity of element or marshy utter in the water and the signals are delivered to Arduino

4.2 Non-functional Requirements:


Following are the non-functional requirements of the proposed solution.

FR No.	Non-Functional Requirement	Description
NFR-1	Usability	Monitors the flow and quality of
		ground water, and investigates surface-
		and ground-water
		interactions.
NFR-2	Security	The data and information are secured
		in the application by using the application
		firewall.
NFR-3	Reliability	The Real time sensor output values
		with future predicted data storage with output
		efficiency of 98%. It also
		gives certainty for aquaculture safety.
NFR-4	Performance	The performance of system has higher
		efficiency and environmentally friendly.
NFR-5	Availability	It is available in the form of mobile UI
		24 x 7 monitoring system.
NFR-6	Scalability	The system has high scalability. Able
		to be changed in size or scale to give the best
		output.
NFR-7	Stability	The ability of the system to bring itself
		back to its stable configuration. The stability is
		high.
NFR-8	Efficiency	The monitoring system is highly
11 IX-0	Linciency	efficient, high mobility with consumption of
		power.

5 PROJECT DESIGN

5.1 Data Flow Diagrams:

A Data Flow Diagram (DFD) is a traditional visual representation of the information flows within a system. A neat and clear DFD can depict the right amount of the system requirement graphically. It shows how data enters and leaves the system, what changes the information, and where data is stored.

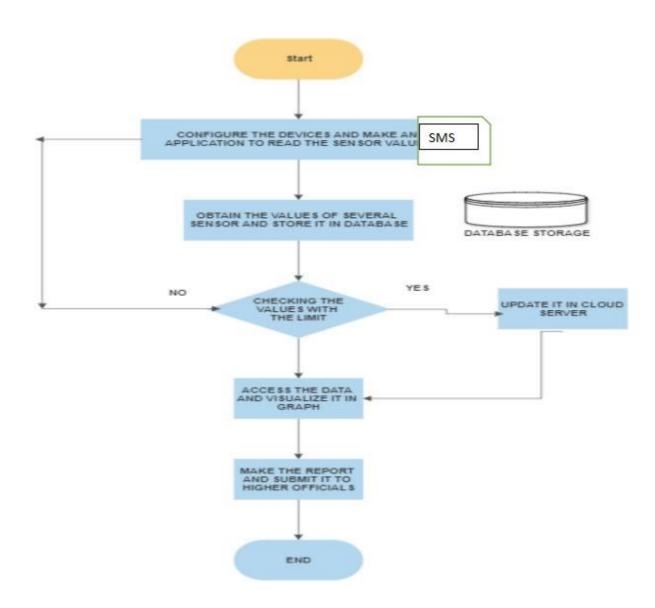

5.2 Solution And Technical Architecture

Summary

This code pattern explains how to build an IOT based river water monitoring and controlling system with some predefined values.

Flow

- Feed the data received from the Sensor unit which are placed in the river sides.
- The collected data will be displayed in the Web page to the user.
- Then the collected data is sent to the data base, where the collected data and the predefined data are checked and monitored.
- If any data exceed the predefined data, then the control signal will send to the Admin.
- The collected data will be stored in the IBM cloud storage. Later the data will be controlled by the admin via Web UI

Components & Technologies:

S.No	Component	Description	Technology
1.	Sensor Data	The data is collected form the various sensor placed in the river sides.	ESP32Wifi module Raspberry Pie.
2.	Database for Storage	The data/info need to be stored for accessing it in future	MySQL-Oracle
3.	File Storage	File storage requirements	IBM Block Storage or Other Storage Service or Local Filesystem
4.	Cloud Database	Database Service on Cloud	IBM cloud
5.	Data Storage	File storage requirements	IBM Block Storage

Application Characteristics:

S.No	Characteristics	Description	Technology
1.	PH level Monitoring	The PH level of river water can be monitoredvia placing sensors in rivers.	PH-sensor
2.	Air Quality Monitoring	Theclarity and purity ofriver water can be monitored	Surface Mount Sensor
3.	Temperature Monitoring	The temperature of river water can be monitored	Temperature sensor
4.	Water Treatment	can be used as both a safety device in the water purification process as carbon dioxide, methane, and carbon monoxide are some of the key gases produced during the treatment process	NDIR gas sensors
4.	Soil Condition Monitoring	Soil condition monitoring sensors allow farmers to collect data about rainfall, temperature, and other metrics over time to track trends and predict irrigation needs.	Acoustic sensor

5.3 User Stories

Use the below template to list all the user stories for the product.

Sprint	Functional Requiremen t (Epic)	User story Numb er	User Story / Task	Story Points	Priority	Team Members
Sprint-1	Registration	USN-1	As a user, I can register for the application by entering my email, password, and confirming My password.	2	High	ADITYA SAGAR. P ROHITH. G SUNIL. M DHINA. L
	Registration via Facebook	USN-3	As a user, I can register for the application through Facebook	2	Low	
	Registration via Mail ID	USN-4	As a user, I can register for the application through Gmail	2	Medium	
Sprint-2	Confirmation	USN-2	As a user, I will receive confirmation email once I have registered for the application	1	High	
	Login	USN-5	As a user, I can log into the application by entering email & password	1	High	
	IBM Cloud service Access		Get access to IBM cloud services.	2	High	
Sprint-3	Create the IBM Watson IoT and device Settings	USN-6	To create the IBM Watson IoT Platform and integrate the microcontroller with it, to send the sensed data on Cloud	2	High	ADITYA SAGAR. P ROHITH. G SUNIL. M
	Create a node red service		To create a node red service to integrate the IBM Watson along with the Web UI	2	medium	ROHITH. M SUNIL. G DHINA. L
	Create a Web UI	USN-8	To create a Web UI, to access the data from the cloud and display all parameters.	2	Medium	ROHITH. G
	To develop a Python code		Create a python code to sense the physical quantity and store data.	2	Medium	SUNIL. M
						ROHITH. G
	cloud.	USN-10	Publish Data that is sensed by the microcontroller to the Cloud	3	High	DHINA. L
Sprint-4	Fast-SMS Service	USN-11	Use Fast SMS to send alert messages once the parameters like pH, Turbidity and temperature goes beyond the	3	High	ADITYA SAGAR. P ROHITH. G SUNIL. M
	Testing	USN-12	threshold Testing of project and final deliverables	3	Medium	SUNIL, M

6. PROJECT PLANNING AND SCHEDULING

6.1 SPRINT PLANNING & SCHEDULING:

TITLE	DESCRIPTION	DATE
Literature Survey & Information Gathering	Literature survey on the selected project is done by gathering information about related details on technical papers and web browsing.	06 OCTOBER 2022
Empathy Map	Prepared Empathy Map Canvas to combine thoughts and pains, gains of the project with all team members.	08 OCTOBER 2022
Ideation	Brainstorming session is conducted with all team members to list out all the ideas and prioritize the top 3 ideas.	09 OCTOBER 2022
Proposed Solution	Prepared the proposed solution document, which includes the novelty, feasibility of idea, business model, social impact scalability of solution, etc.	2022
Problem Solution Fit	Prepared problem - solution fit document.	30 OCTOBER 2022

6.2 SPRINT DELIVERY SCHEDULE

Product Backlog, Sprint Schedule, and Estimation

SI.	ACTIVITY TITLE	ACTIVITY DESCRIPTION	DURATION
NO			
1.	Understanding the project requirement	Assign the team members and create a repository in the GitHub. Assign the task to each member and teach how to use and open and class the GitHub and IBM career education	1 WEEK
2.	Starting of project	Advise students to attend classes of IBM portals, create and develop a rough diagram based on project description and gather information on IOT and IBM projects and team leaders assign tasks to each member of the project	
3.	Attend class	Team members and team lead must watch and learn from classes provided by IBM and NALAYATHIRAN and must gain access of MIT license for their project.	4 WEEKS
4.	Budget and scope of project	Budget and analyze the use of IOT in the project and discuss with team for budget prediction to predict the favorability for the customer to buy.	1 WEEK

Project Tracker, Velocity & Burndown Charts


Sprint	Total Stor y Poin ts	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed (as on Planned End Date)	Sprint Release Date (Actual)
Sprint-1	20	4 Days	24 Oct 2022	27 Oct 2022	20	29 Oct 2022
Sprint-2	20	5 Days	28 Oct 2022	01 Nov 2022	20	04 Nov 2022
Sprint-3	20	8 Days	02 Nov 2022	09 Nov 2022	20	11 Nov 2022
Sprint-4	20	9 Days	10 Nov 2022	18 Nov 2022	20	19 Nov 2022

Velocity:

$$AV = \frac{sprint\ duration}{velocity} = \frac{20}{10} = 2$$


Burndown Chart:



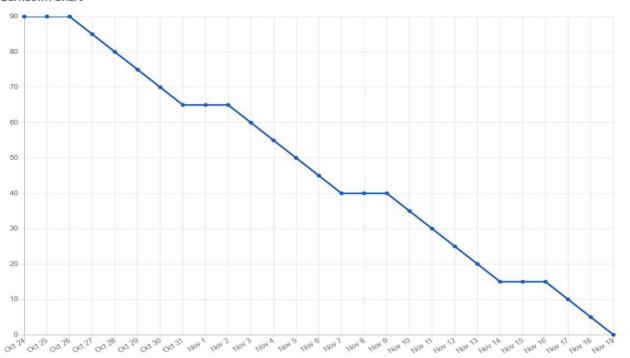

6.3 REPORT FROM JIRA

TIMELINE CREATED USING JIRA SOFTWARE

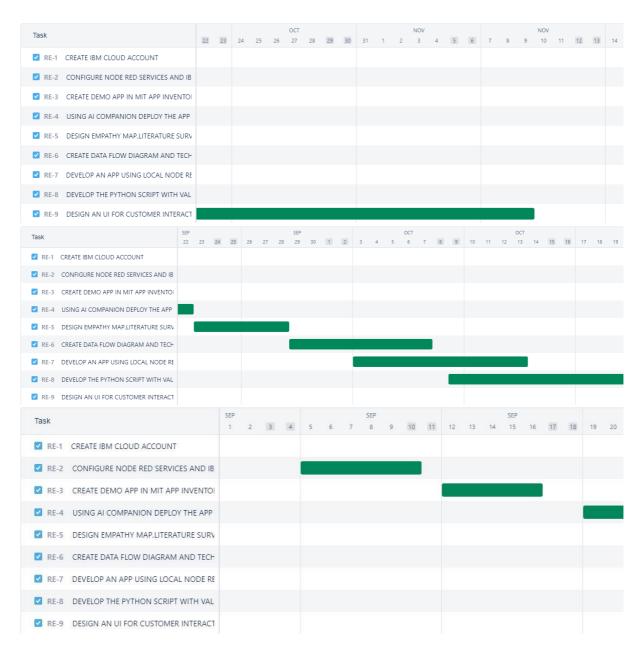

LISTS IN JIRA:


}	# Key	≡ Summary	Status	≡ Category -
	RE-1	CREATE IBM CLOUD ACCOUNT	DONE	PREREQUISITE
	RE-2	CONFIGURE NODE RED SERVICES AND IBM WATSON IOT PLA	DONE	PREREQUISITE
	RE-3	CREATE DEMO APP IN MIT APP INVENTOR 2.	DONE	MOBILE APPLICATION
	RE-4	USING AI COMPANION DEPLOY THE APP IN MOBILE	DONE	DEPLOYMENT AND TESTING
	RE-5	DESIGN EMPATHY MAP,LITERATURE SURVEY FOR OUR PROJE	DONE	IDEATION PHASE
	RE-6	CREATE DATA FLOW DIAGRAM AND TECHINICAL ARCHITECT	DONE	PHASE 1
	RE-7	DEVELOP AN APP USING LOCAL NODE RED AND DEPLOY IT T	DONE	SPRINT DETAILS
	RE-8	DEVELOP THE PYTHON SCRIPT WITH VALID DEVICE CREDEN	DONE	SPRINT DETAILS
	RE-9	DESIGN AN UI FOR CUSTOMER INTERACTING AND GET IT FO	DONE	SPRINT DETAILS


ISSUES:

Name =	Type ÷	Related Schemes	
ERROR IN MSG PAYLOAD EVENTS	Base	Default Issue Type Scheme	
SSUE IN CONFIGURING NODE RED DASHBOARD	Base	Default Issue Type Scheme	
ERROR 1101 IN MIT APP INVENTOR	Subtask	Default Issue Type Scheme	
URL NOT RESPONDED THE NODE RED DATA URL NOT RESPONDED	Subtask	Default Issue Type Scheme	


7. CODING AND SOLUTIONING


7.1 NODE RED SERVICE ASSOCIATED WITH IBM CLOUD:

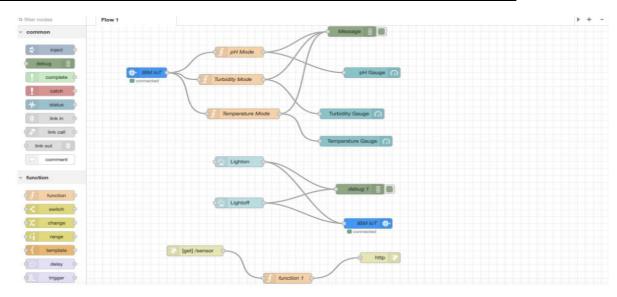

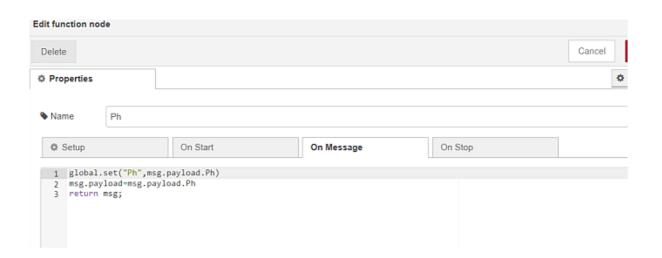

Node red Dashboard:

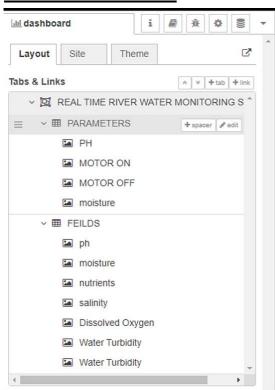

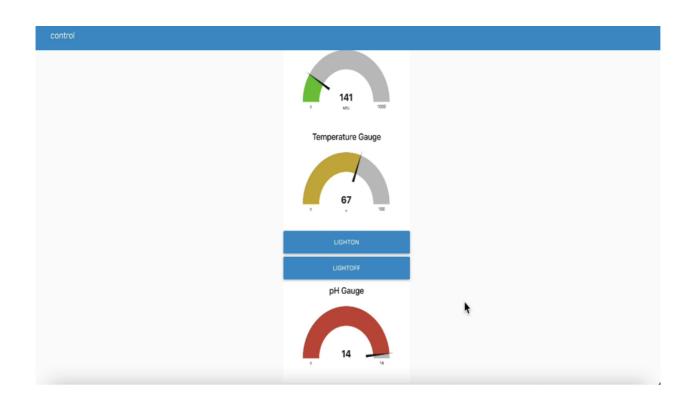

8. TESTING

8.1 Test Case Analysis

This report shows the number of test cases that have passed, failed, and untested

Section	Total Cases	Not Tested	Fai l	Pass
Print Engine	15	0	0	15
Client Application	45	0	0	45
Security	1	0	0	1
Outsource Shipping	2	0	0	2
Exception Reporting	10	0	0	10
Final Report Output	4	0	0	4
Version Control	3	0	0	3

8.2 USER ACCEPTANCE TESTING:

1. Purpose of Document

The purpose of this document is to briefly explain the test coverage and open issues of the REAL TIME RIVER WATER QUALITY MONITORING AND CONTROL SYSTEMS project at the time of the release to User Acceptance Testing (UAT).

2. Defect Analysis

This report shows the number of resolved or closed bugs at each severity level, and how they were resolved

Resolution	Severity 1	Severity 2	Severity 3	Severity 4	Subtotal
By Design	9	5	4	3	21
Duplicate	2	0	2	0	4
External	3	4	1	2	10
Fixed	10	1	5	17	33
Not Reproduced	0	0	1	0	1
Skipped	0	0	1	2	3
Won't Fix	0	3	3	1	7
Totals	24	13	17	25	79

9. RESULT

9.1 PERFROMANCE METRICS:

				NFT - Ris	sk Assessmer	nt			
S.No	Project Name	Scope/feature	Functional Changes	Hardware Changes	Software Changes	Impact of	Load/Voluem Changes	Risk Score	Justification
	REAL TIME RIVER WATER QUALITY MONITORING AND CONTROL SYSTEM								
1		New	Low	No Changes	Moderate	3days	>5 to 10%	ORANGE	As we have seen the changes

PERFORMANCE TABLE

PARAMETER	PERFORMANCE	DESCRIPTION
ADMIN TESTING	95%-100%	THE TESTING DONE
		BEFORE IT IS DEPLOYED AS
		AN APP
CUSTOMER	75-85%	THE CUSTOMER NEED TO BE
SATISFACTION		SATISFIED WITH THE MOBILE
		APPLICATION
USER INTERFACE	65-85%	THE APP CAN USED BY
		ANYONE.(EASE OF
		ACCESS)
SEVER RESPONSE	50-75%	url - response
DATA VALIDATION	60-80%	VALID DATA FROM THE APP
WITH NO. OF TEST	(15-30	
CASE	TESTCASE)	
ERROR	3-5%	REAL-TIME DELAY
		MAY OCCUR

10. ADVANTAGES AND DISADVANTAGES

ADVANTAGES:

- The prototype developed for water quality maintenance is very beneficial for safeguarding public health and also adds to the clean environment.
- The automation of this water monitoring, cleaning and control process removes the need of manual labor and thus saves time and money.
- The automation of the system makes the control and monitoring process more efficient and effective. Real time monitoring on mobile phone which is possible through the interface of plc with Arduino and Bluetooth module allows remote controlling of the system.

DISADVANTAGES:

- It is difficult to collect the water samples from all the area of the water body.
- The cost of analysis is very high.
- The lab testing and analysis takes some time and hence the lab results do not reflect real time water quality measurement due to delay in measurement.
- The process is time consuming due to slow process of manual data collection from different locations of the water body.
- The method is prone to human errors of various forms.

11. CONCLUSION

Thus, our project is used to Monitoring of Turbidity, PH & Temperature of Water makes use of water detection sensor with unique advantage and existing GSM network. The system can monitor water quality automatically, and it is low in cost and does not require people on duty. So, the water quality testing is likely to be more economical, convenient and fast. The system has good flexibility. Only by replacing the corresponding sensors and changing the relevant software programs, this system can be used to monitor other water quality parameters.

The operation is simple. The system can be expanded to monitor hydrologic, air pollution, industrial and agricultural production and so on. It has widespread application and extension value. By keeping the embedded devices in the environment for monitoring enables self-protection (i.e., smart environment) to the environment. To implement this need to deploy the sensor devices in the environment for collecting the data and analysis. By deploying sensor devices in the environment, we can bring the environment into real life i.e., it can interact with other objects through the network.

Then the collected data and analysis results will be available to the end user through the Wi-Fi.

12. FUTURE SCOPE

We use water detection sensor has unique advantage. It consumes less time to monitor than a manual method for checking polluted levels, and notifies immediately to reduce affected rate of pollution in water. People who are living in rural areas near to the river will be very satisfied with our idea. It will be useful to monitor water pollution in specific area. So, this system prevents people from water pollution. It will be used for farming purpose to check quality water, temperature, and PH level. Our Impact of this project is also creating a social satisfaction for farmers too. The scalability of this project gives the addition of more different type of sensors. By interfacing the relay we can control the supply of water. We can also implement as a revenue model. This system could also be implemented in various industrial processes. The system can be modified according to the needs of the user and can be implemented along with lab view to monitor data on computers.

try:

13. APPENDIX

13.1 SOURCE CODE: PYTHON CODE TO PUBLISH DATA

```
import ibmiotf.application
import ibmiotf.device
import time
import random
import sys
from twilio.rest import Client
import keys
Client = Client(keys.account_sid, keys.auth_token)
organization = "bvyu7c"
deviceType = "micro"
deviceId = "abcd"
authMethod = "token"
authToken = "12345678"
pH = random.randint(1, 14)
turbidity = random.randint(1, 1000)
temperature = random.randint(0, 100)
def myCommandCallback(cmd):
print("Command Received: %s" % cmd.data['command'])
print(cmd)
```

```
deviceOptions = {"org": organization, "type": deviceType, "id": deviceId,
"auth-method":
authMethod,
"auth-token": authToken}
deviceCli = ibmiotf.device.Client(deviceOptions)
except Exception as e:
print("caught exception connecting device: %s" % str(e))
sys.exit()
deviceCli.connect()
while True:
pH = random.randint(1, 14)
turbidity = random.randint(1, 1000)
temperature = random.randint(0, 100)
data = {'pH': pH, 'turbid': turbidity, 'temp': temperature}
def SMS():
message = Client.messages.create(
body="ALERT!! THE WATER QUALITY IS DEGRADED",
from_=keys.twilio_number,
to = keys.target_number)
print(message.body)
if temperature>70 or pH<6 or turbidity>400:
SMS()
def myOnPublishCallback():
print("Published pH= %s" % pH, "Turbidity:%s" % turbidity,
"Temperature:%s" % temperature)
```

```
success = deviceCli.publishEvent("demo", "json", data, qos=0, on_publish=myOnPublishCallback)
if not success:
print("Not Connected to ibmiot")
time.sleep(5)
deviceCli.commandCallback = myCommandCallback
deviceCli.disconnect()
#Twilio Account Credentials
account_sid ='HCe9yeb9bf43aa629b503bdd01d0962d465'
auth_token ='58u3m0ade0472038ab36d45e0d9fb6e7'
twilio_number ='+197870199xxx'
target_number ='+919950555xxx'
```


OUTPUT

```
Type "copyright", "credits" or "license()" for more information.
      ======= RESTART: E:\IBM PROJECTS\ibmpublish.py ========
2022-11-17 20:42:47,069 ibmiotf.device.Client
                                                  INFO
                                                           Connected successfully: d:84708c:a
Published Ph = 8 WaterTurbidity = 54 % salinity = 862 DissolvedO2 = 81 conductivity = 175
Ouality of River water is measured and its correct
                                                                                   — П
                                                                                              >
*Pvthon 3.7.0 Shell*
File Edit Shell Debug Options Window Help
Quality of River water is measured and its correct
Published Ph = 6 WaterTurbidity = 80 % salinity = 652 DissolvedO2 = 123 conductivity = 306
Quality of River water is measured and its correct
Published Ph = 8 WaterTurbidity = 57 % salinity = 579 DissolvedO2 = 121 conductivity = 459
Quality of River water is measured and its correct
Published Ph = 7 WaterTurbidity = 85 % salinity = 703 DissolvedO2 = 106 conductivity = 165
Quality of River water is measured and its correct
Published Ph = 8 WaterTurbidity = 61 % salinity = 872 DissolvedO2 = 124 conductivity = 892
Quality of River water is measured and its correct
Published Ph = 6 WaterTurbidity = 75 % salinity = 934 DissolvedO2 = 119 conductivity = 351
Quality of River water is measured and its correct
Published Ph = 7 WaterTurbidity = 65 % salinity = 732 DissolvedO2 = 102 conductivity = 1104
Quality of River water is measured and its correct
Published Ph = 7 WaterTurbidity = 97 % salinity = 791 DissolvedO2 = 75 conductivity = 887
Quality of River water is measured and its correct
Published Ph = 8 WaterTurbidity = 47 % salinity = 992 DissolvedO2 = 111 conductivity = 770
Quality of River water is measured and its correct
Published Ph = 8 WaterTurbidity = 23 % salinity = 570 DissolvedO2 = 73 conductivity = 135
Quality of River water is measured and its correct
Published Ph = 6 WaterTurbidity = 76 % salinity = 516 DissolvedO2 = 88 conductivity = 226
Quality of River water is measured and its correct
Published Ph = 8 WaterTurbidity = 23 % salinity = 754 DissolvedO2 = 127 conductivity = 1101
Quality of River water is measured and its correct
```

	Device ID	Status	Device Type	Class ID	Date Added	Descriptive Location
~	12345	Connected	abcd	Device	Nov 9, 2022 9:43 PM	
	Identity	Device Information	Recent Events	State Logs		

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
IoTSensor	{"Ph":6,"WaterTurbidity":34,"salinity":605,"Disso	json	a few seconds ago
IoTSensor	{"Ph":7,"WaterTurbidity":48,"salinity":871,"Disso	json	a few seconds ago
event_1	{"Water_Turbidity":41,"Ph":1,"moisture":51,"nutr	json	a few seconds ago
IoTSensor	{"Ph":8,"WaterTurbidity":88,"salinity":729,"Disso	json	a few seconds ago
IoTSensor	{"Ph":6,"WaterTurbidity":23,"salinity":504,"Disso	json	a few seconds ago

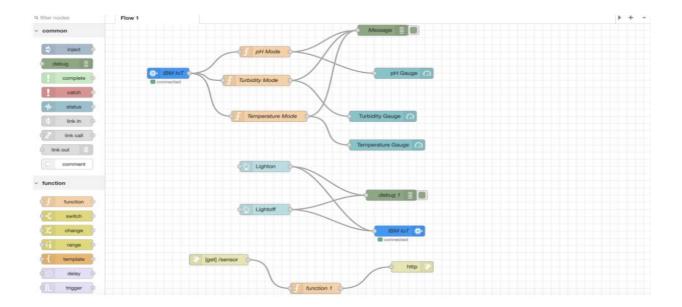

HTML CODE:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <style>
  h1 {text-align: center;}
  p {text-align: center;}
  div {text-align: center;}
  body {
    background-image: url("https://thumbs.dreamstime.com/b/clear-transparent-light-blue-
water-pool-texture-background-150961732.jpg");
   background-color: #ccccc;
   }
  </style>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Login page in HTML</title>
</head>
```


```
<body>
```


```
<h1>Login Page</h1>
<form action="">
  <!-- Headings for the form -->
  <div class="headingsContainer">
    <h3>Sign in</h3>
    Sign in with your username and password
  </div>
  <!-- Main container for all inputs -->
  <div class="mainContainer">
    <!-- Username -->
    <label for="username">Your username</label>
    <input type="text" placeholder="Enter Username" name="username" required>
    <br>><br>>
    <!-- Password -->
    <label for="pswrd">Your password</label>
    <input type="password" placeholder="Enter Password" name="pswrd" required>
    <!-- sub container for the checkbox and forgot password link -->
    <div class="subcontainer">
      <label>
       <input type="checkbox" checked="checked" name="remember"> Remember me
      </label>
       <a href="#">Forgot Password?</a>
    </div>
    <button type="submit" onclick="window.location.href = 'https://node-red-qltdp-2022-
```

11-07.eu-gb.mybluemix.net/ui';">Login</button>


```
<!-- Sign up link -->
class="register">Not a member? <a href="#">Register here!</a>
</div>

</form>
</body>
</html>
```

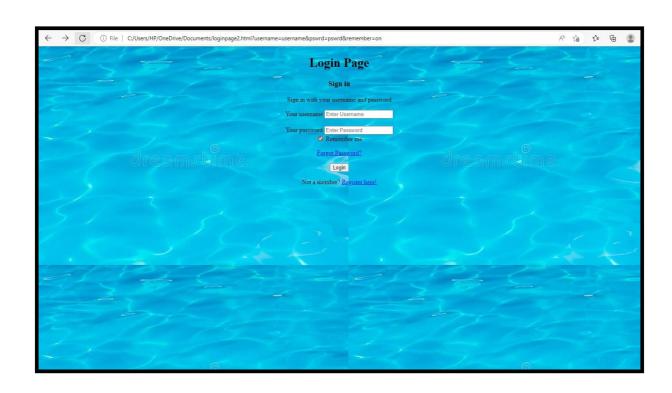

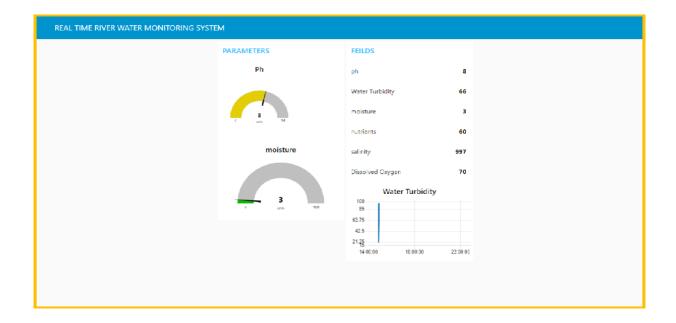

MOBILE APP

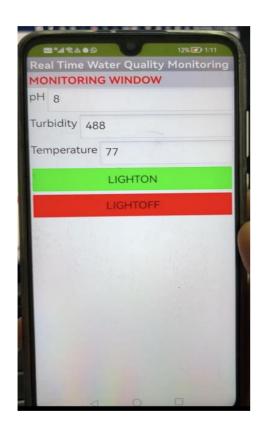

13.2 GIT-HUB LINK:

https://github.com/IBM-EPBL/IBM-Project-6995-1658844833

13.3 PROJECT DEMO LINK:

https://drive.google.com/file/d/1mjeY8b-zZrLCn9N9EWiTAd8-93A0j1cr/view?usp=share_link