PROJECT REPORT

REAL-TIME RIVER QUALITY MONITORING AND CONTROL SYSTEM

TEAM ID: PNT2022TMID08766

TEAM MEMBERS:

1. SRIHARAN V
2. SELVA VINAYAGAM M
3. RAJA PRAKASH R
4. JANARTHANA KRISHNA V
5. PUKALMANI K

INDEX

INTRODUCTION

1.1 Project Overview:

River Water quality monitoring System

River water which is used as drinking water is a very precious commodity for all human beings.The system consists of several sensors which are used for measuring physical and chemical parameters of water. The parameters such as temperature, pH, and dissolved oxygen of the water can be measured. Using this system a person can detect pollutants from a water body from anywhere in the world.Current water quality monitoring system is a manual system with a monotonous process and is very time-consuming This paper proposes a sensor- based water quality monitoring system. The main components of Wireless Sensor Network (WSN) include a micro-controller for processing the system, communication system for inter and intra node communication and several sensors Real-time data access can be done by using remote monitoring and Internet of Things (IoT) technology Data collected at the IBM cloud Server and verify them to trigger the actions to be performed.

1.2 Purpose:

Water quality refers to chemical, physical biological and radio logical characteristics of water. It is a measure of the condition of water relative to the necessities of one or more bio-tic species and or to any human need or purposes .Water quality monitoring is defined as a sampling and analysis of the water in lake, stream, ocean and river and conditions of the water body. Smart water quality monitoring is a process of real-time monitoring and the analysis of water to identify changes in parameters based on the physical, chemical and biological characteristics.Monitoring water quality is clearly important: in our seas, our rivers, on the surface and in our ports, for both companies and the public. It enables us to assess how they are changing, analyze trends and to inform plans and strategies that improve water quality and ensures that water meets its designated use.There are several indicators determining water quality. These include dissolved oxygen, turbidity, bio indicators, nitrates, pH scale and water temperature.Monitoring water quality helps to identify specific pollutants, a certain chemical, and the source of the pollution.There are many sources of water pollution: wastewater from sewage seeping into the water supply; agricultural practices (e.g., the use of

pesticides and fertilizer); oil pollution, river and marine dumping, port, shipping and industrial activity. Monitoring water quality and a water quality assessment regularly provides a source of data identify immediate issues – and their source.

- Identifying trends, short and long-term, in water quality.
- Data collected over a period of time will show trends, for example identifying increasing concentrations of nitrogen pollution in a river or an inland waterway. The total data will then help to identify key water quality parameters.
- Environmental planning methods: water pollution prevention and management.
- Collecting, interpreting and using data is essential for the development of a sound and effective water quality strategy. The absence of real-time data will however hamper the development of strategies and limit the impact on pollution control. Using digital systems and programs for data collection and management is a solution to this challenge.
- Monitoring water quality is a global issue and concern: on land and at sea. Within the European Union, the European Green Deal sets out goals for restoring biological biodiversity and reducing water pollution, as well as publishing various directives to ensure standards of water quality. Individual nation states, for example France, have also clear regulatory frameworks requiring the effective monitoring of water quality. In the United States, the Environmental Protection Agency (EPA) enforces regulations to address water pollution in each state. Across the world, countries increasingly understand the importance of effective water quality monitoring parameters and methods.

2.LITERATURE SURVEY

2.1 Existing Problem:

Due to population growth, urbanization ,and climatic change ,competition for water resources is expected to increase, with a particular impact on agriculture, river water. Water will be suitableness to potable water monitoring compound spillage identification done rivers, remote estimation for swimming pools. It holds self-sufficient hubs that unite with the cloud to ongoing water control .The River water needed to be treated before it is used in agriculture feilds,hence the parameters affecting the quality of river-water need to be analysed and to be used for water treatement purpose.

2.2 References:

1. K.S. Adu-Manu, C. Tapparello, W. Heinzelman, F.A. Katsriku, J.-D. Abdulai

Water quality monitoring using wireless sensor networks: Current trends and future research directions ACM Transactions on Sensor Networks (TOSN) (2017).

2. S. Thombre, R.U. Islam, K. Andersson, M.S. Hossain

IP based Wireless Sensor Networks : performance Analysis using Simulations and Experiments. Journal of Wireless Mobile Networks, Ubiquitous Computing, and Dependable Applications, 7 (2016).

3. Rushikesh Kshirsagar, R.Mudhalwadkar, Saish Kalaskar

Design and Development of IoT Based Water Quality Measurement System. The idea about low-cost IOT based portable approach for water quality measurements system. Because of its low-cost approach, everyone can afford to use it to determine quality of water(2019).

4. N. Vijayakumar, R. Ramya

The real time monitoring of water quality in IoT environment. The parameters such as temperature, PH, turbidity, conductivity, dissolved oxygen of the water can be measured. The measured values from the sensors can be processed by the core controller. The raspberry PI B+ model can be used as a core controller (2015).

5. M.Chitra, D. Sadhihskumar, R. Aravindh, M. Murali, R. Vaittilingame

IoT based Water Flood Detection and Early Warning System. The collected information (data) from the water level sensor and temperature and humidity sensor passed to Thingview Android application in order to find the flow graph level of the water level in the river and temperature, humidity values and sends SMS to the registered contact mobile numbers (2020).

6. Dr.Geetha

IoT based real time water quality monitoring system using smart sensor

WQM is a cost effective and efficient system designed to monitor drinking water quality with the help of IOT(2020).

2.3 Problem Statement:

The global availability of water resources has never been as scarce as it is today. At the same time, pollution levels in the water are imposing a bigger challenge than ever. Water is often becoming polluted without awareness; often due to the complex water distribution systems, where water is flowing in and out of the pipes. Existing water treatment systems cannot detect the dissolved contaminants such as chemicals. Using traditional approaches of

monitoring water quality in the water management system are not safe. Chlorinating is usually used to protect micro-organisms. However, drinking too much chlorinated water leads to Cancer and other diseases. Thus, chlorine is considered as another contaminant as well as pathogen and viruses. Moreover, there is no single instrument that can detect all the possible water parameters such as pH, temperature, and conductivity. Thus, our model will help curb water borne diseases by developing a real time online water quality monitoring system. With this model we can detect all the possible water quality parameters and availability of water in water tank.

IDEATION & PROPOSED SOLUTION

3.1 Empathy Map Canvas:

An empathy map is a simple, easy-to-digest visual that captures knowledge about a user's behaviours and attitudes. It is a useful tool to helps teams better understand their users.Creating an effective solution requires understanding the true problem and the person who is experiencing it. The exercise of creating the map helps participants consider things from the user's perspective along with his or her goals and challenges.

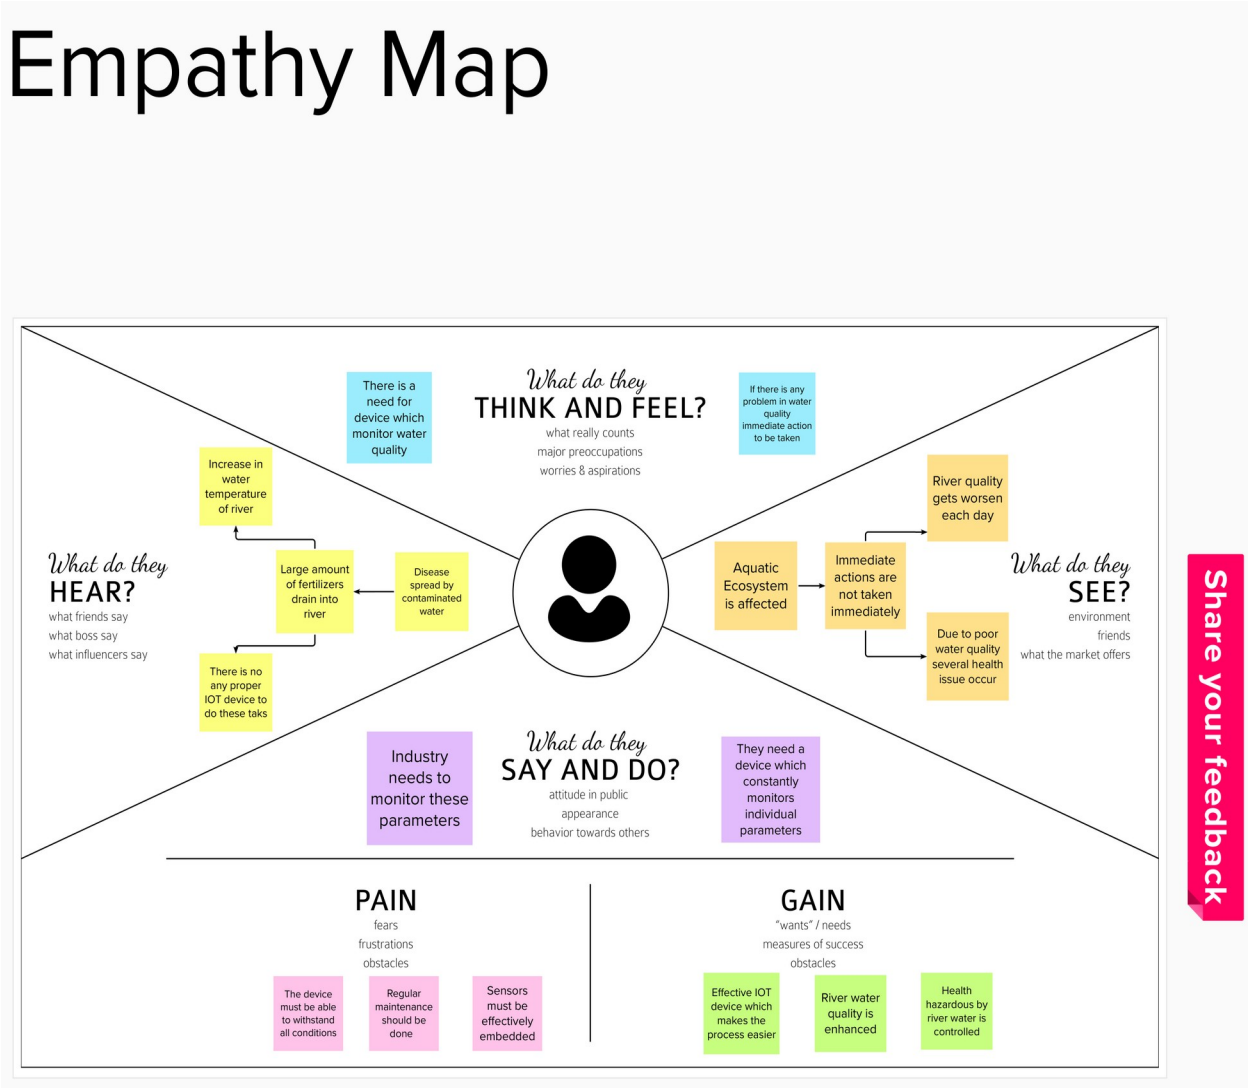

Reference:https://app.mural.co/invitation/mural/ibm0082/1666797743994?sender=uf93f4fc8b3ed 9d16cc620908&key=535a741b-def9-48d5-92b8-e0850fa6f1e

3.2 Ideation & Brainstorming:

Brainstorming provides a free and open environment that encourages everyone within a team to participate in the creative thinking process that leads to problem solving. Prioritizing volume over value, out-of-the-box ideas are welcome and built upon, and all participants are encouraged to collaborate, helping each other develop a rich amount of creative solutions.

Use this template in your own brainstorming sessions so your team can unleash their imagination and start shaping concepts even if you're not sitting in the same room.

*Reference:*https://app.mural.co/invitation/mural/ibmproject1215/1666848 258091?sender=uf93f4fc8b3ed9d16cc620908&key=d4906cd4-138e-40f9-a546-ea061cc6c665

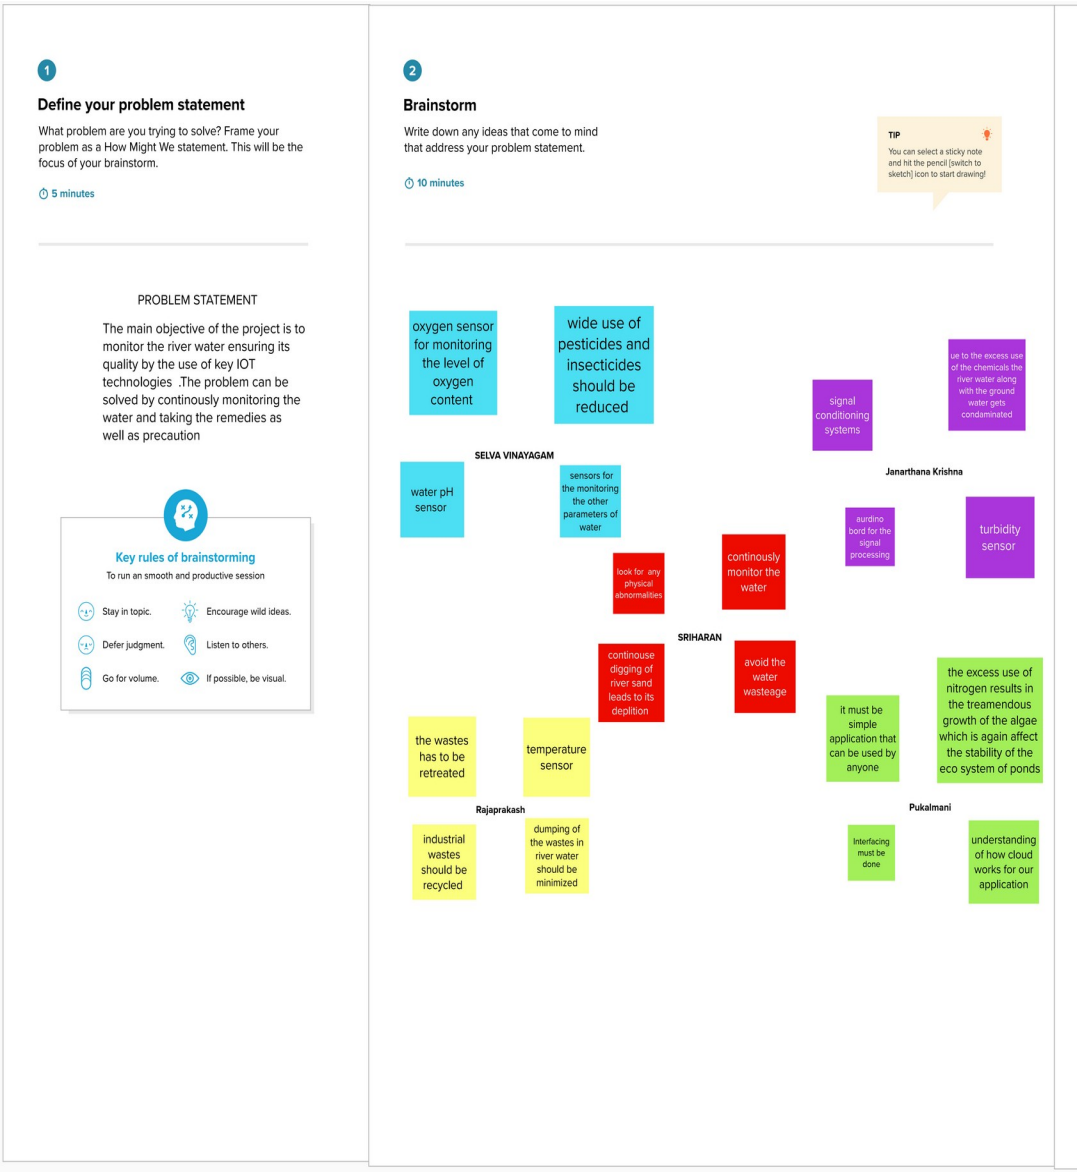

4

Prioritize

Your team should all be on the same page about what's important moving forward. Place your ideas on this grid to determine which ideas are important and which are feasible.

20 minutes

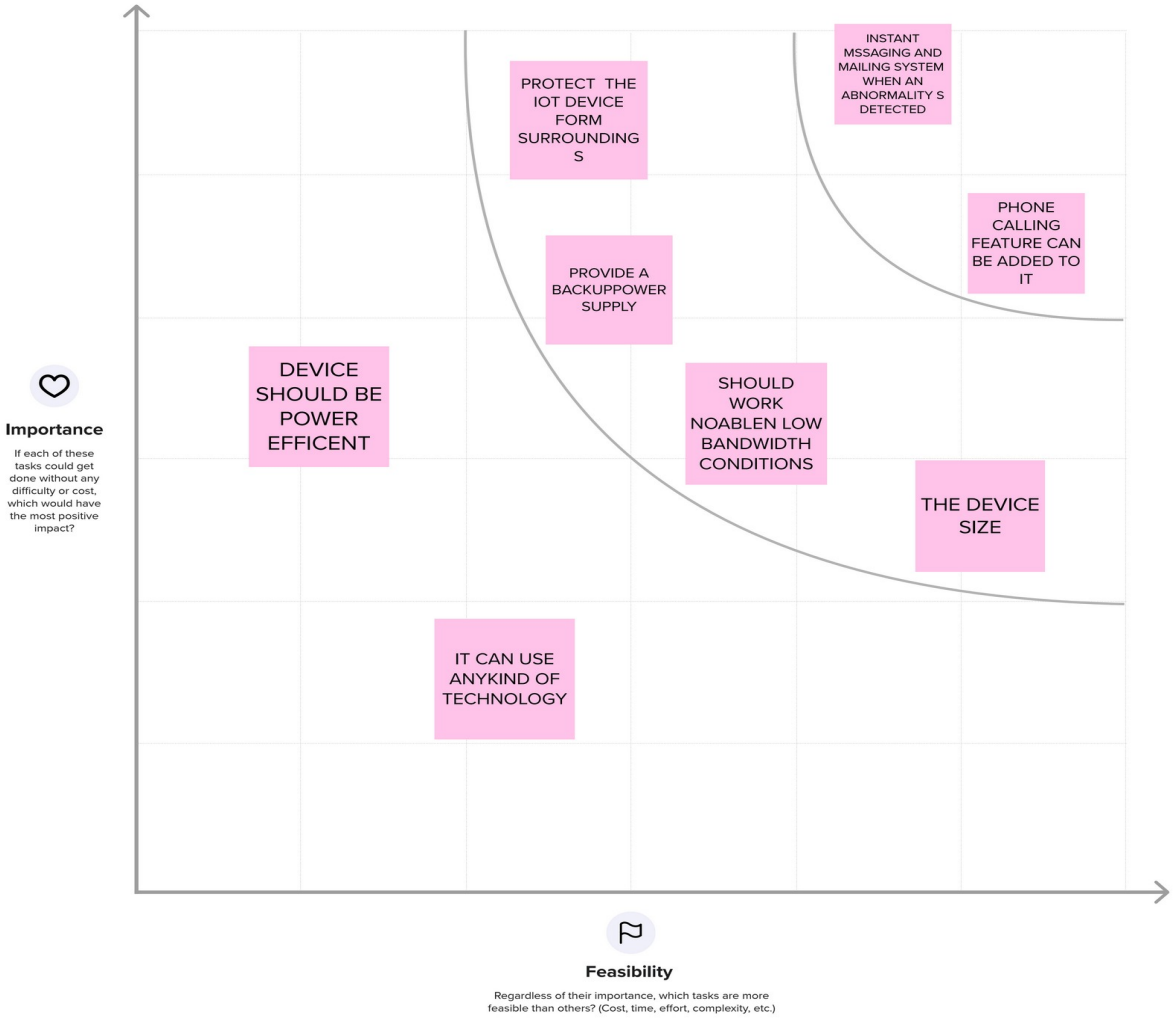

3

Group ideas

Take turns sharing your ideas while clustering similar or related notes as you go. Once all sticky notes have been grouped, give each cluster a sentence-like label. If a cluster is bigger than six sticky notes, try and see if you and break it up into smaller sub-groups.

20 minutes

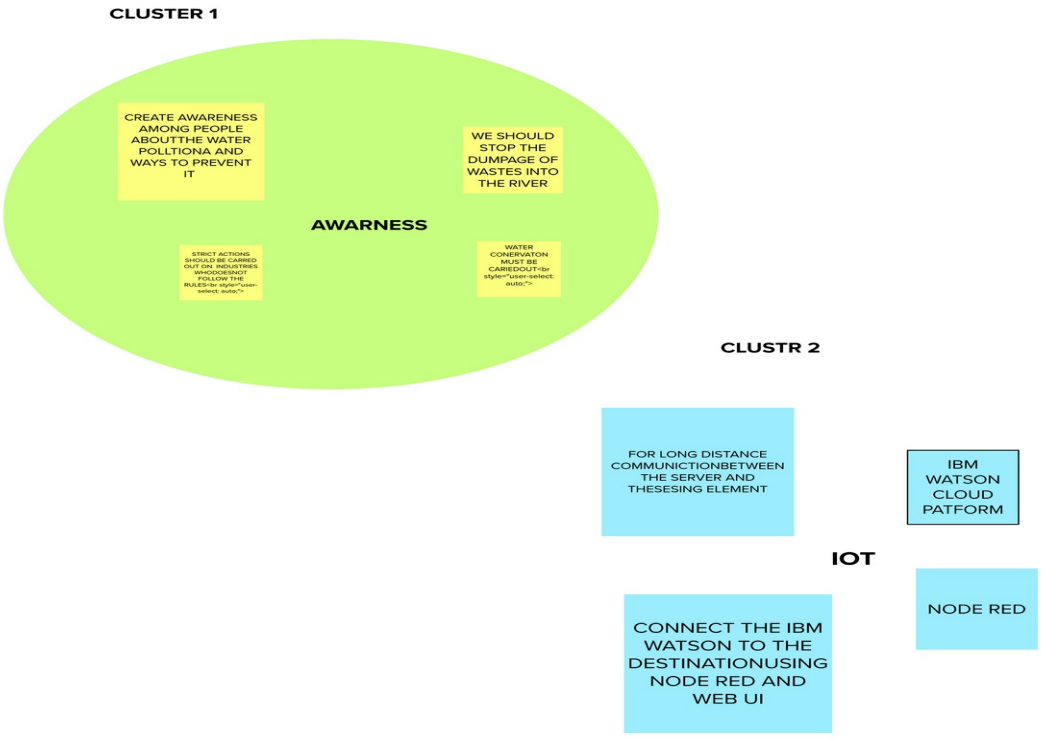

3.3 Proposed Solution:

S.No.	Parameter	Description
1.	Problem Statement (Problem to be solved)	Massive growth of algae called eutrophication leads to pollution. (Monitoring and controlling the quality of river water)
2.	Idea / Solution description	1. Detecting the dust particles, PH level of water,Dissolved oxygen and temperature to be Monitored and altering the authorities if waterQuality is not good. 2. If the water is contaminated an alert is made to the user/ local authority through SMS or can be viewed through web application anytime.
3.	Novelty / Uniqueness	By observing the river water quality it can be used in a proper manner for domestic purpose and to control the industrial wastes dumped into the water
4.	Social Impact / Customer Satisfaction	Algal growth, fertilizers, pesticides cause river pollution which can impact all living beings. Better monitoring and control measures can impact health and vegetation massively.

5.	Business Model (Revenue Model)	Service based product is developed to serve the local people to know the quality of water before consuming it or using it for any purpose. This prevents health issues or at most loss of living being.
6.	Scalability of the Solution	Measuring of real time values and continuous monitoring helps in maintaining the quality of water.

3.4 PROBLEM SOLUTION:

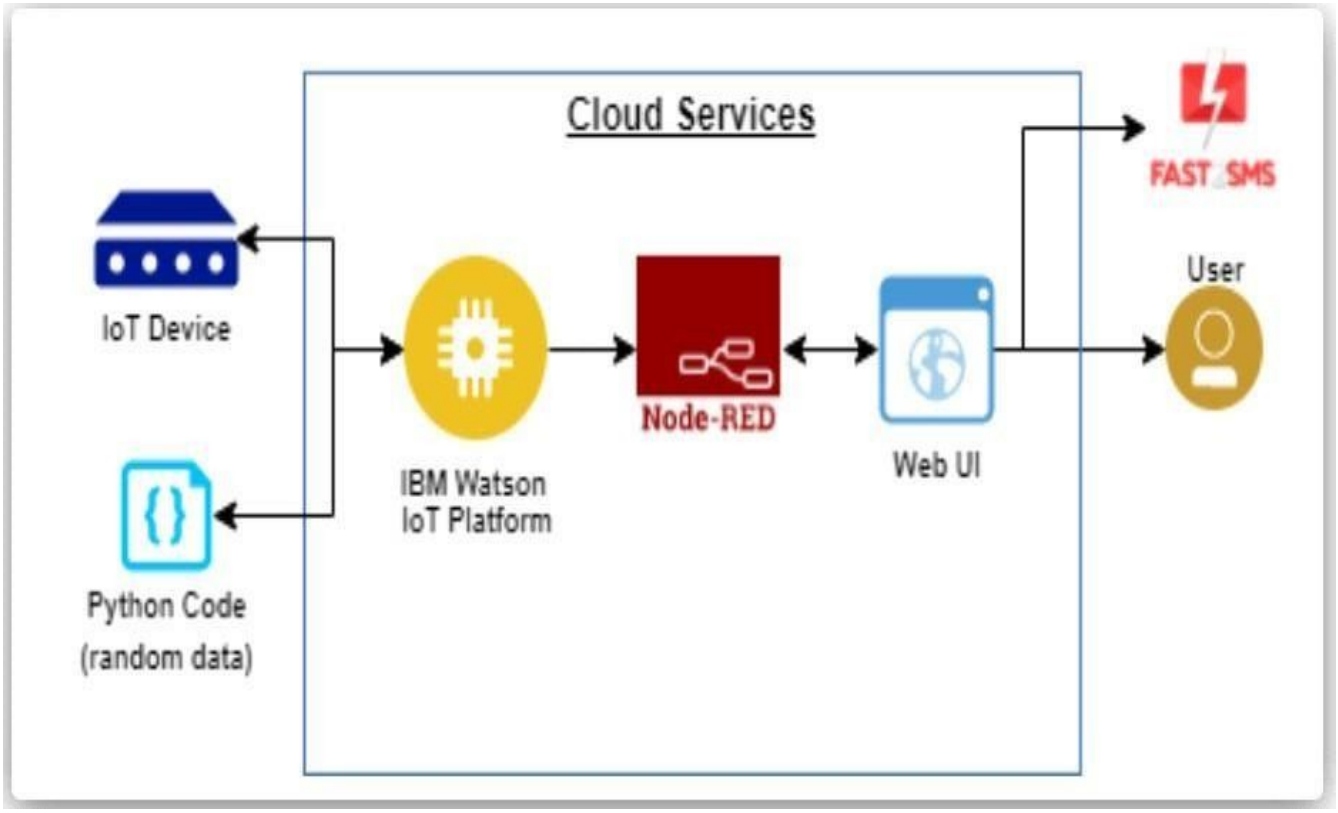

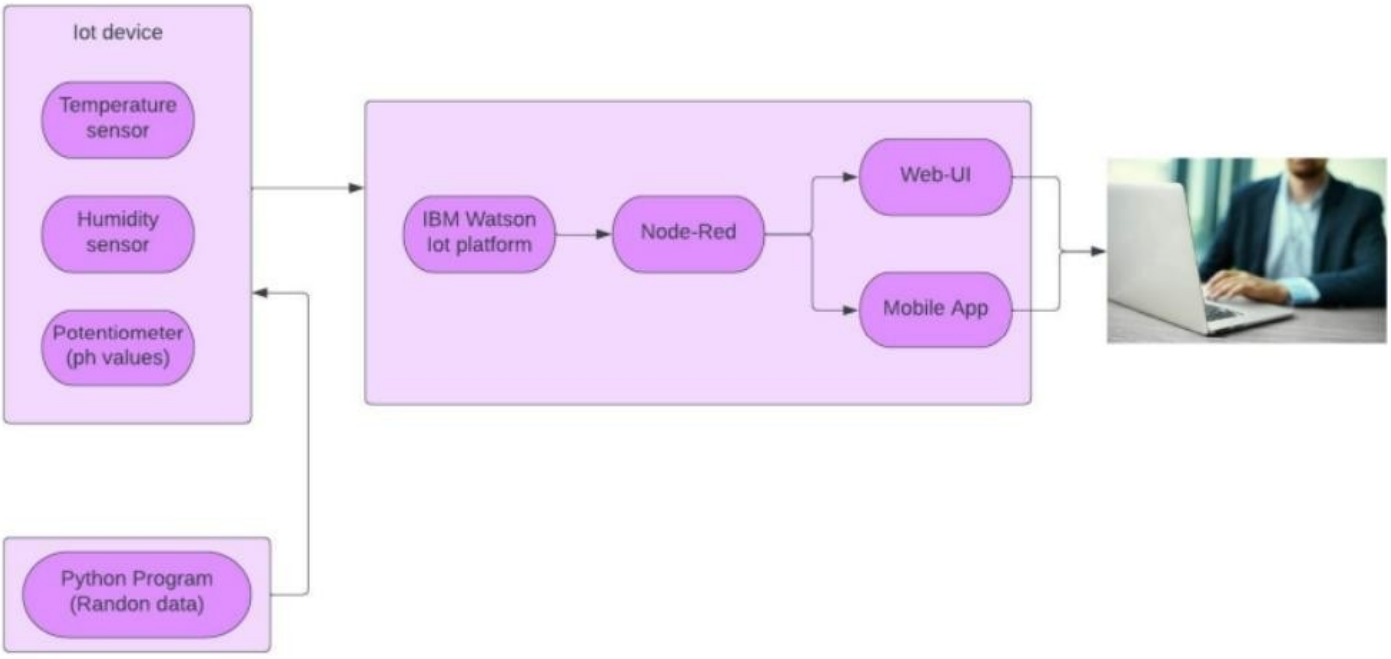

4 REQUIREMENT ANALYSIS

4.1 Functional Requirements:

Following are the functional requirements of the proposed solution.

FR No.	Functional Requirement (Epic)	Sub Requirement (Story / Sub-Task)
FR-1	User Registration	Registration through Form Registration through Gmail Registration through LinkedIN
FR-2	User Confirmation	Confirmation via Email Confirmation via OTP
FR-3	Ultrasonic generator	Periodically the waves are generated to destroy algae in the range of 25%,50%,100%
FR-4	Ph level detection	To observe the water quality, Ph sensor is used and the signals are conveyed to the Arduino.
FR-5	Turbidity detection	Turbidity sensor measures the purity of element or marshy utter in the water and the signals are delivered to Arduino

4.2 Non-functional Requirements:

Following are the non-functional requirements of the proposed solution.

FR No.	Non-Functional Requirement	Description
NFR-1	**Usability**	Monitors the flow and quality of ground water, and investigates surface- and ground-water interactions.
NFR-2	**Security**	The data and information are secured in the application by using the application firewall.
NFR-3	**Reliability**	The Real time sensor output values with future predicted data storage with output efficiency of 98%. It also gives certainty for aquaculture safety.
NFR-4	**Performance**	The performance of system has higher efficiency and environmental friendly.
NFR-5	**Availability**	It is available in the form of mobile UI 24 x 7 monitoring system.
NFR-6	**Scalability**	The system has high scalability. Able to be changed in size or scale to give the best output.
NFR-7	**Stability**	The ability of the system to bring itself back to its stable configuration. The stability is high.
NFR-8	**Efficiency**	The monitoring system is highly efficient,high mobility with consumption of power.

5 PROJECT DESIGN

5.1 Data Flow Diagrams:

A Data Flow Diagram (DFD) is a traditional visual representation of the information flows within a system. A neat and clear DFD can depict the right amount of the system requirement graphically. It shows how data enters and leaves the system, what changes the information, and where data is stored.

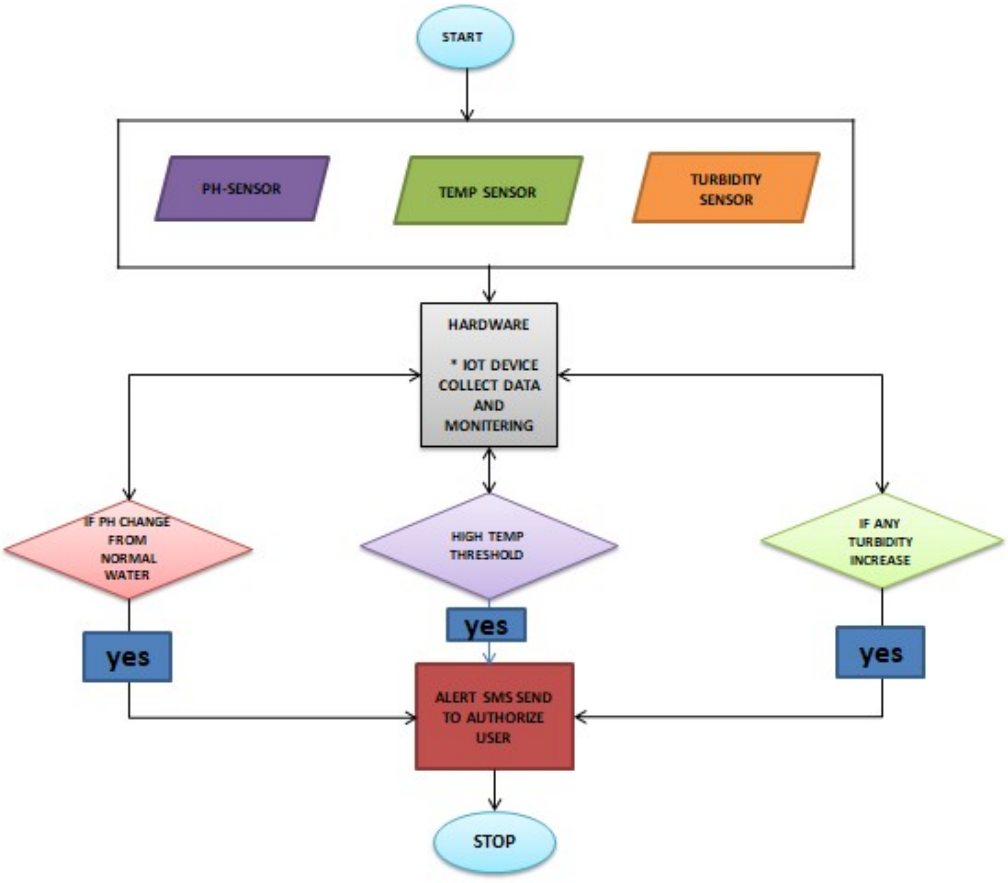

5.2 SOLUTION AND TECHNICAL ARCHITECTURE

Summary

This code pattern explains how to build an IOT based river water monitoring and controlling system with some predefined values.

Flow

- Feed the data received from the Sensor unit which are placed in the river sides.
- The collected data will be displayed in the Web page to the user.
- Then the collected data is sent to the data base, where the collected data and the predefined data are checked and monitored.
- If any data exceed the predefined data then the control signal will send to the Admin.
- The collected data will be stored in the IBM cloud storage. Later the data will be controlled by the admin via Web UI.

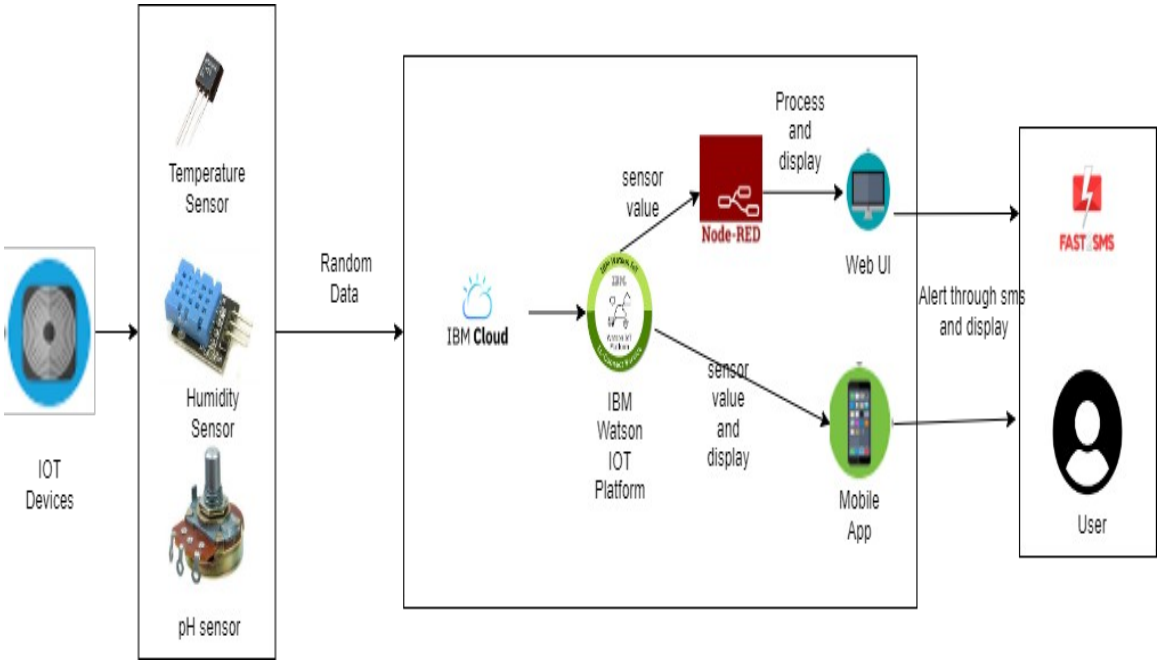

Components & Technologies:

S.No	Component	Description	Technology
1.	User Interface	Web UI, Mobile App	Node – Red, Kubernetes, MIT mobile app inventor
2.	Application Logic-1	Generate random data	Python
3.	Application Logic-2	Generate random sensor data	IBM Watson IOT Platform
4.	Cloud Database	Database Service on Cloud	IBM DB2, IBM Cloudant,
5.	External API-1	Send SMS to customer	Fast SMS API
6.	Infrastructure (Server / Cloud)	Application Deployment on Cloud	Cloud Foundry, Kubernetes

Application Characteristics:

S.No	Characteristics	Description	Technology
1.	Open-Source Frameworks	open-source frameworks used to develop our project	Node – Red, IBM Cloudant, IBM Watson IOT Platform
2.	Security Implementation	Use of Login facility with username and password for individual user	Password protection in MIT App
3.	Scalable Architecture	Web Ui designed for use in Mobile and computer with adaptive screen size	Node – Red (Web UI)
4.	Availability	Available for the user in both web UI and Mobile Appare some of the key gases produced during the treatment process	Node – Red(Web UI), MIT App(Mobile App)
4.	Performance	Give accurate results and immediate alert in case of contamination of water	Give accurate results and immediate alert in case of contamination of water

5.3 User Stories

Use the below template to list all the user stories for the product.

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release
Customer (Mobile user)	Registration	USN-1	As a user, I can register for the application by entering my email, password, and confirming my password.	I can access my account /dashboard	High	Sprint-1
		USN-2	As a user, I will receive confirmation email once I have registered for the application	I can receive confirmation email & click confirm	High	Sprint-1
		USN-3	As a user, I can register for the application through Google	I can register & access the dashboard with Google Login	Low	Sprint-2
		USN-4	As a user, I can register for the application through G mail	I can access through Gmail	Medium	Sprint-1
	Login	USN-5	As a user, I can log into the application by entering email & password	Login Details are received to me.	High	Sprint-1
	Interface	USN-6	As a user, I can log into the application by entering email & password.	Easy Access application	High	Sprint-1
Customer (Web user)	Dashboard	WUSN-7	As a web User, I can get all information (data)(Temp etc..)	I can easily Understand how to use it.	High	Sprint-1
Customer Care Executive	View Perspective	CCE	As a Customer care, I can view the data in graph plots	Easy Understanding of Graphs	High	Sprint-1
Administrator	Risk factor	ADMIN-1	As a Admin, Update must be done at each step and take care of any errors	Heavy Monitoing is Required.	High	Sprint-2

6. PROJECT PLANNING AND SCHEDULING

6.1 SPRINT PLANNING & SCHEDULING:

TITLE	DESCRIPTION	DATE
Literature Survey & Information Gathering	Literature survey on the selected project is done by gathering information about related details on technical papers and web browsing.	06 OCTOBER 2022
Empathy Map	Prepared Empathy Map Canvas to combine thoughts and pains, gains of the project with all team members .	08 OCTOBER 2022
Ideation	Brainstorming session is conducted with all team members to list out all the ideas and prioritise the top 3 ideas.	09 OCTOBER 2022
Proposed Solution	Prepared the proposed solution document, which includes the novelty, feasibility of idea, business model, social impact, scalability of solution, etc.	28 OCTOBER 2022
Problem Solution Fit	Prepared problem - solution fit document.	30 OCTOBER 2022

6.2 SPRINT DELIVERY SCHEDULE

Product Backlog, Sprint Schedule, and Estimation

Sprint	Functional Requirement (Epic)	User Story Number	User Story / Task	Story Points	Priority	Team Members
Sprint-1	Procurement of Hardware requirements (if needed)	USN-1	Procurement of quality sensors and actuators, microcontroller that will be required to sense the physical parameters like pH, turbidity and Temperature.	2	High	SRIHARAN
	Create IBM Cloud Services	USN-2	Creation of an IBM Cloud account and registering a device.	2	High	
	Configure the IoT device in IBM Cloud.	USN-3	Creation and registering of a device	1	Medium	
Sprint-2	Development of the Python code in IDLE, Install all required libraries like ibmiotf.	USN-4	To develop the Python Code to generate random values of pH ,Temperature and turbidity values along with their units.	1	Medium	
	Create a IBM Watson IoT service and Publish the values generated by python code to Cloud.	USN-5	To create the IBM Watson IoT Platform and integrate the microcontroller with it, to send the sensed data on cloud	1	High	
Sprint-3	Create a Node Red Service	USN-6	To create a node red service to integrate the IBM Watson along with the Web UI	2	Medium	SELVAVIN AYAGAM, PUKALMA NI
	Create a Web UI	USN-7	To create a Web UI, to access the data from the cloud and display all parameters.	2	Medium	RAJAPRAKASH, JANARTHANA KRISHNA
	Generate a link to Interface the node red service with the Web UI/Mobile app	USN-8	Generate Link to interface the services.	3	High	SUSHANTH
Sprint-4	Design a Mobile App, to display pH, Temperature and turbidity values	USN-9	To design a Android App using MIT App inventor, to display pH, Temperature and turbidity values.	2	High	SELVAVINAYAGAM
	Fast-SMS Service	USN-10	Use Fast SMS to send alert messages once the parameters like pH, Turbidity and temperature goes beyond the threshold	3	High	SRIHARAN, SELVAVIN AYAGAM,
	Product Testing	USN-11	Testing of project and final deliverables	3	Medium	PUKALMA NI,RAJAPR AKASH, JANARTHA NA KRISHNA

Project Tracker, Velocity & Burndown Charts

Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed (ason Planned End Date)	Sprint Release Date (Actual)
Sprint -1	20	6 Days	24 Oct 2022	30 Oct 2022	20	15 nov 2022
Sprint -2	20	6 Days	31 Oct 2022	05 Nov 2022	40	30 Oct 2022
Sprint -3	20	6 Days	05 Nov 2022	12 Nov 2022	60	04 Nov 2022
Sprint -4	20	6 Days	12 Nov 2022	19 Nov 2022	80	19 Nov 2022

Velocity:

$$AV = \frac{sprint\ duration}{velocity} = \frac{20}{10} = 2$$

Burndown Chart:

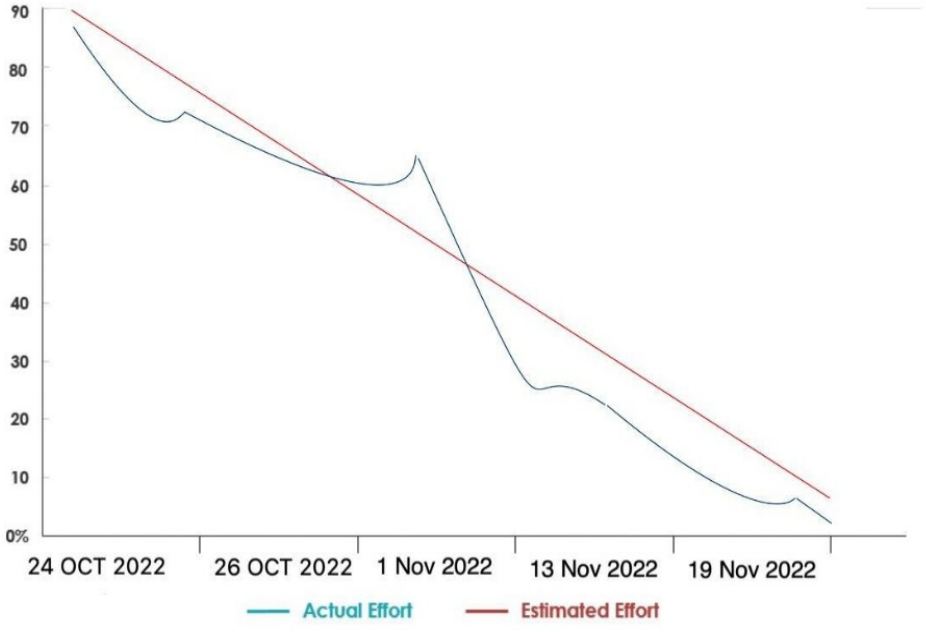

7. CODING AND SOLUTIONING

7.1 NODE RED SERVICE ASSOCIATED WITH IBM CLOUD:

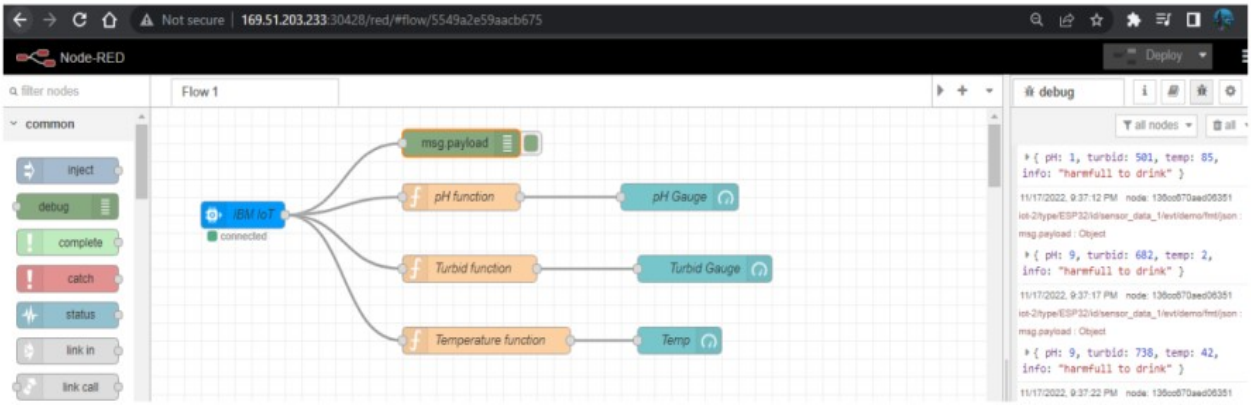

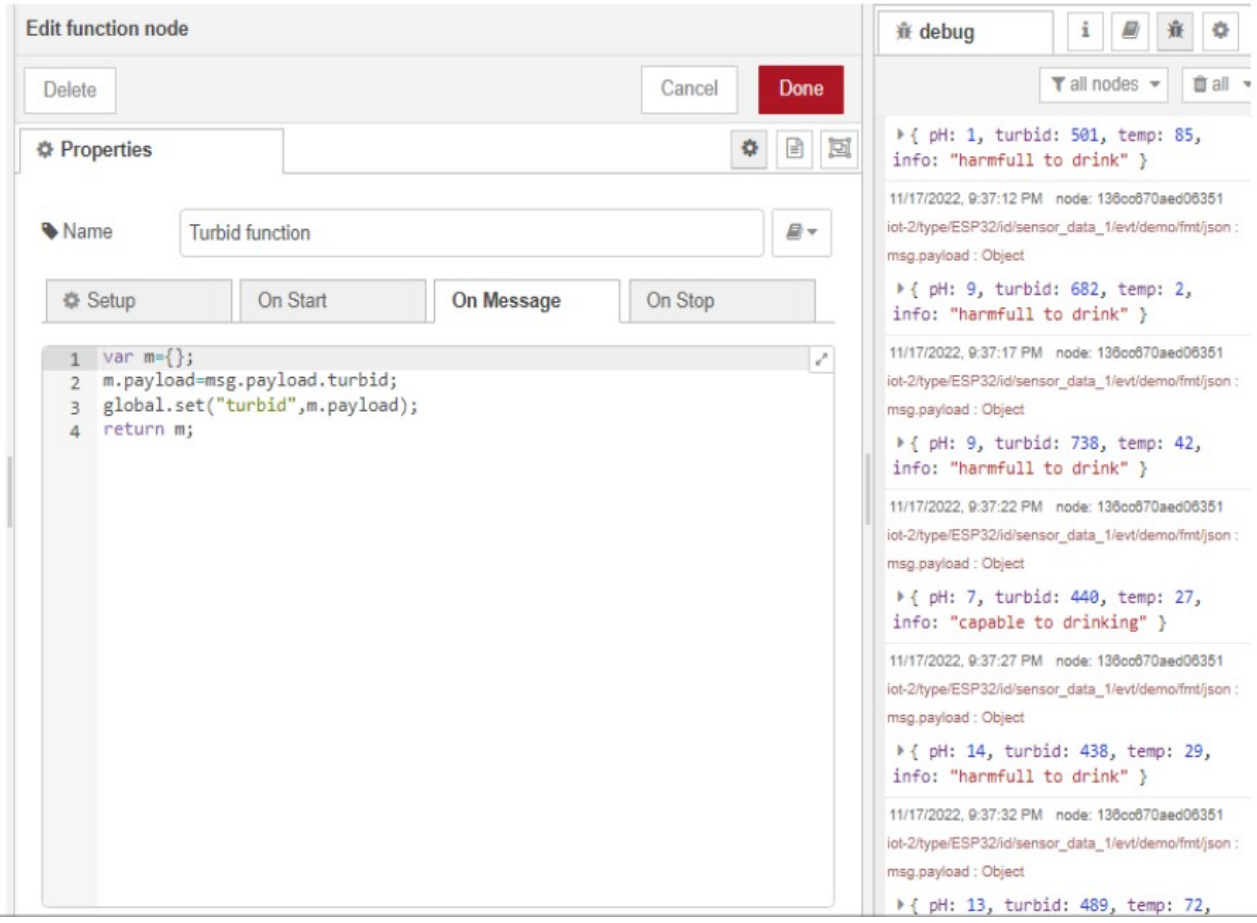

Node red Dashboard:

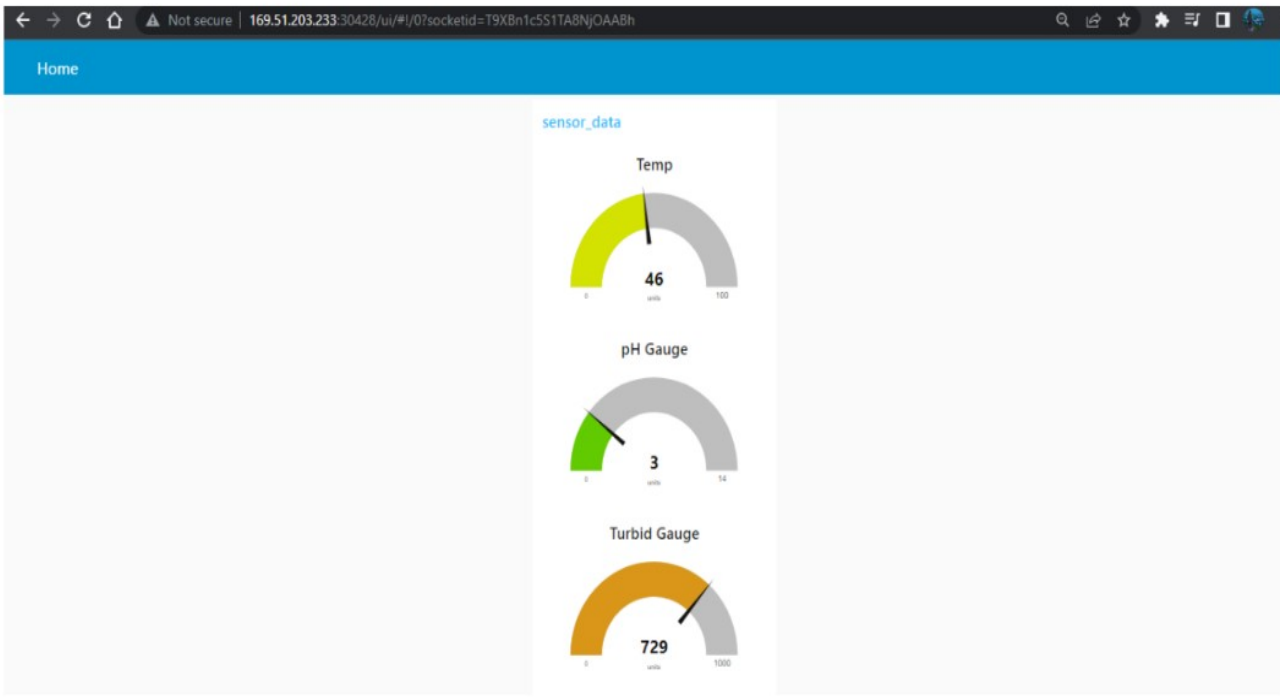

Link is created to link Node-red and Mobile app:

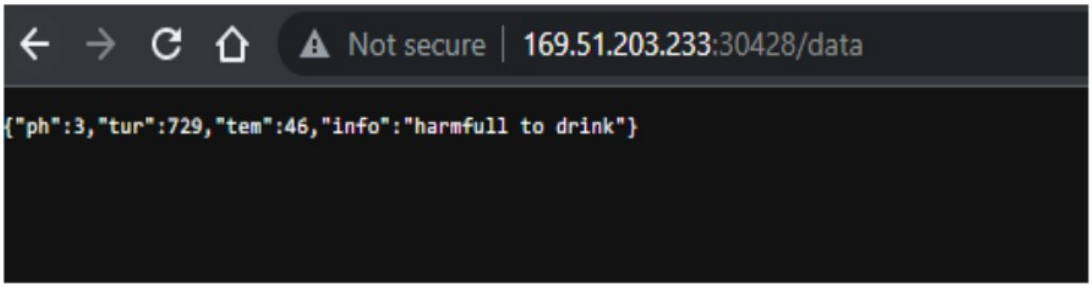

8. TESTING

8.1 Test Case Analysis

This report shows the number of test cases that have passed, failed, and untested

Section	Total Cases	Not Tested	Fail	Pass
Print Engine	15	0	0	15
Client Application	45	0	0	45
Security	1	0	0	1
Outsource Shipping	2	0	0	2
Exception Reporting	10	0	0	10
Final Report Output	4	0	0	4
Version Control	3	0	0	3

8.2 USER ACCEPTANCE TESTING:

1. Purpose of Document

The purpose of this document is to briefly explain the test coverage and open issues of the REAL TIME RIVER WATER QUALITY MONITORING AND CONTROL SYSTEMS

project at the time of the release to User Acceptance Testing (UAT).

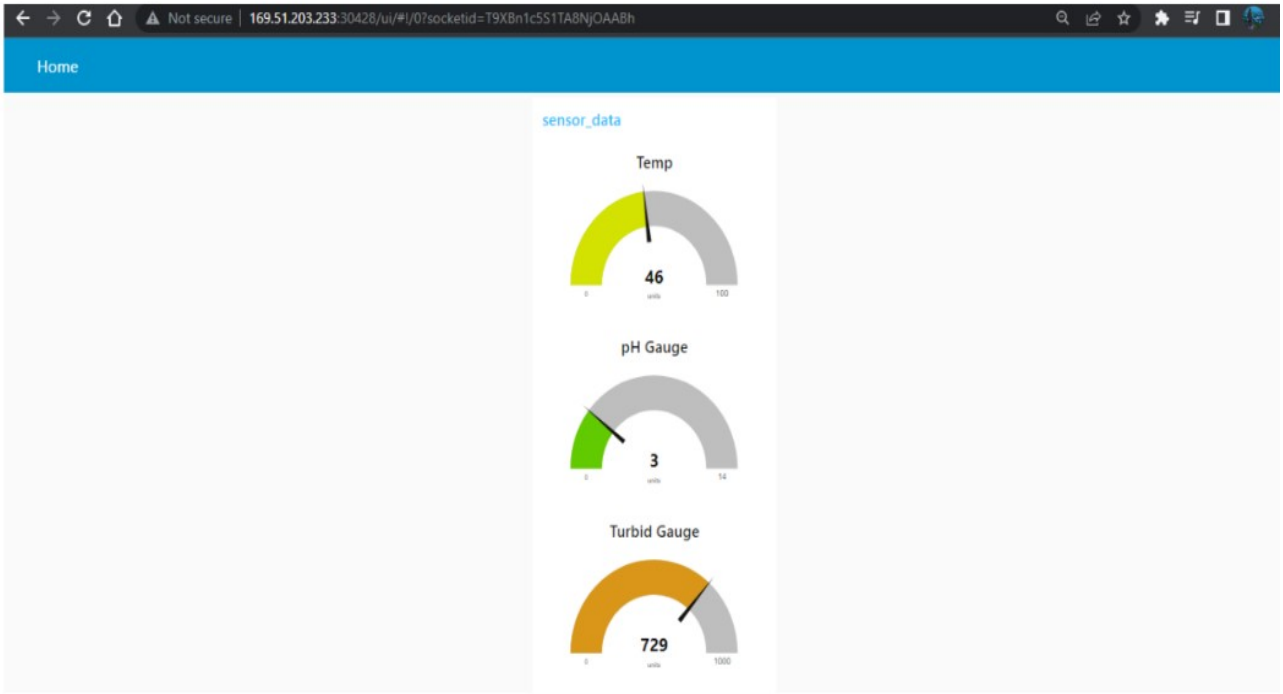

Link is created to link Node-red and Mobile app:

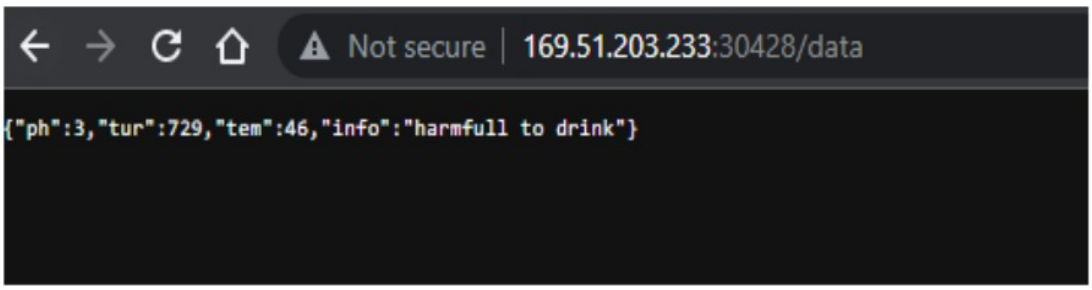

2. Defect Analysis

This report shows the number of resolved or closed bugs at each severity level, and how they were resolved

Resolution	Severity 1	Severity 2	Severity 3	Severity 4	Subtotal
By Design	9	5	4	3	21
Duplicate	2	0	2	0	4
External	3	4	1	2	10
Fixed	10	1	5	17	33
Not Reproduced	0	0	1	0	1
Skipped	0	0	1	2	3
Won't Fix	0	3	3	1	7
Totals	24	13	17	25	79

9. RESULT

PERFORMANCE TABLE

PARAMETER	PERFORMANCE	DESCRIPTION
ADMIN TESTING	95%-100%	THE TESTING DONE BEFORE IT IS DEPLOYED AS AN APP
CUSTOMER SATISFACTION	75-85%	THE CUSTOMER NEED TO BE SATISFIED WITH THE MOBILE APPLICATION
USER INTERFACE	65-85%	THE APP CAN USED BY ANYONE.(EASE OF ACCESS)
SEVER RESPONSE	50-75%	url - response

DATA VALIDATION WITH NO. OF TEST CASE	60-80% (15-30 TESTCASE)	VALID DATA FROM THE APP
ERROR	3-5%	REAL-TIME DELAY MAY OCCUR

10. ADVANTAGES AND DISADVANTAGES

ADVANTAGES:

- The prototype developed for water quality maintenance is very beneficial for safeguarding public health and also adds to the clean environment.
- The automation of this water monitoring, cleaning and control process removes the need of manual labor and thus saves time and money.
- The automation of the system makes the control and monitoring process more efficient and effective. Real time monitoring on mobile phone which is possible through the interface of plc with Arduino and Bluetooth module allows remote controlling of the system.

DISADVANTAGES:

- It is difficult to collect the water samples from all the area of the water body.
- The cost of analysis is very high.
- The lab testing and analysis takes some time and hence the lab results does not reflect real time water quality measurement due to delay in measurement.
- The process is time consuming due to slow process of manual data collection from different locations of the water body.
- The method is prone to human errors of various forms.

11. CONCLUSION

Thus our project is used to Monitoring of Turbidity, PH & Temperature of Water makes use of water detection sensor with unique advantage and existing GSM network. The system can monitor water quality automatically, and it is low in cost and does not require people on duty. So the water quality testing is likely to be more economical, convenient and fast. The system has good flexibility. Only by replacing the corresponding sensors and changing the relevant software programs, this system can be used to monitor other water quality parameters.

The operation is simple. The system can be expanded to monitor hydrologic, air pollution, industrial and agricultural production and so on. It has widespread application and extension value.By keeping the embedded devices in the environment for monitoring enables self protection (i.e., smart environment) to the environment. To implement this need to deploy the sensor devices in the environment for collecting the data and analysis. By deploying sensor devices in the environment, we can bring the environment into real life i.e. it can interact with other objects through the network.

Then the collected data and analysis results will be available to the end user through the Wi-Fi.

FUTURE SCOPE

We use water detection sensor has unique advantage.It consumes less time to monitor than a manual method for checking polluted levels,and notifies immediately to reduce affected rate of pollution in water.People who are living in rural areas near to the river will be very satisfied with our idea.It will be useful to monitor water pollution in specific area.So this system prevent people from water pollution.It will be used for farming purpose to check quality water,temperature and PH level.Our Impact of this project is also create a social satisfaction for farmers too.The scalabilty of this project gives the addition of more different type of sensors.By interfacing the relay we can control the supply of water. We can also implement as a revenue model.This system could also be implemented in various industrial processes. The system can be modified according to the needs of the user and can be implemented along with lab view to monitor data on computers.

13.APPENDIX

13.1 SOURCE CODE:

PYTHON CODE TO PUBLISH DATA

```
import ibmiotf.application
import ibmiotf.device
import time
import random
import sys
organization = "wbp1fk"
deviceType = "ESP32"
deviceId = "sensor_data_1"
authMethod = "token"authToken = "prototype_1"
pH = random.randint(1, 14)
turbidity = random.randint(1, 1000)
temperature = random.randint(0, 100)
info=""
def myCommandCallback(cmd):
print("Command Received: %s" % cmd.data['command'])
print(cmd)
try:
deviceOptions={"org":organization,"type":deviceType,
"id":deviceId,"auth-method":authMethod,"auth-token":authToken}
deviceCli = ibmiotf.device.Client(deviceOptions)
except Exception as e:
```

```
print("caught exception connecting device: %s" % str(e))
sys.exit()
deviceCli.connect()
while True:
pH = random.randint(1, 14)
turbidity = random.randint(1, 1000)
temperature = random.randint(0, 100)
if temperature>70 or pH<6 or pH>8 or turbidity>500:
print("high")
info="harmfull to drink"
else:
info="capable to drinking"
data = {'pH': pH, 'turbid': turbidity,'temp': temperature,'info':info}
def myOnPublishCallback():print("Published pH= %s" % pH, "Turbidity:%s"
% turbidity,
"Temperature:%s" % temperature)
success = deviceCli.publishEvent("demo", "json", data, qos=0,
on_publish=myOnPublishCallback)
if not success:
print("Not Connected to ibmiot")
time.sleep(5)
deviceCli.commandCallback = myCommandCallback
deviceCli.disconnect()
```

OUTPUT

```
========== RESTART: C:\Users\srihath\Desktop\IBM\final.py ==========
high2022-11-14 20:03:53,055   ibmiotf.device.Client      INFO    Connected succe
ssfully: d:wbp1fk:ESP32:sensor_data_1

Published pH= 9 Turbidity:595 Temperature:24
high
Published pH= 10 Turbidity:259 Temperature:98
Published pH= 14 Turbidity:163 Temperature:59
high
Published pH= 1 Turbidity:109 Temperature:56
high
Published pH= 8 Turbidity:527 Temperature:7
high
Published pH= 11 Turbidity:874 Temperature:62
Published pH= 9 Turbidity:76 Temperature:40
high
Published pH= 12 Turbidity:478 Temperature:91
high
Published pH= 7 Turbidity:887 Temperature:54
Published pH= 13 Turbidity:18 Temperature:64
Published pH= 13 Turbidity:219 Temperature:47
high
Published pH= 10 Turbidity:764 Temperature:36
high
Published pH= 11 Turbidity:545 Temperature:88
```

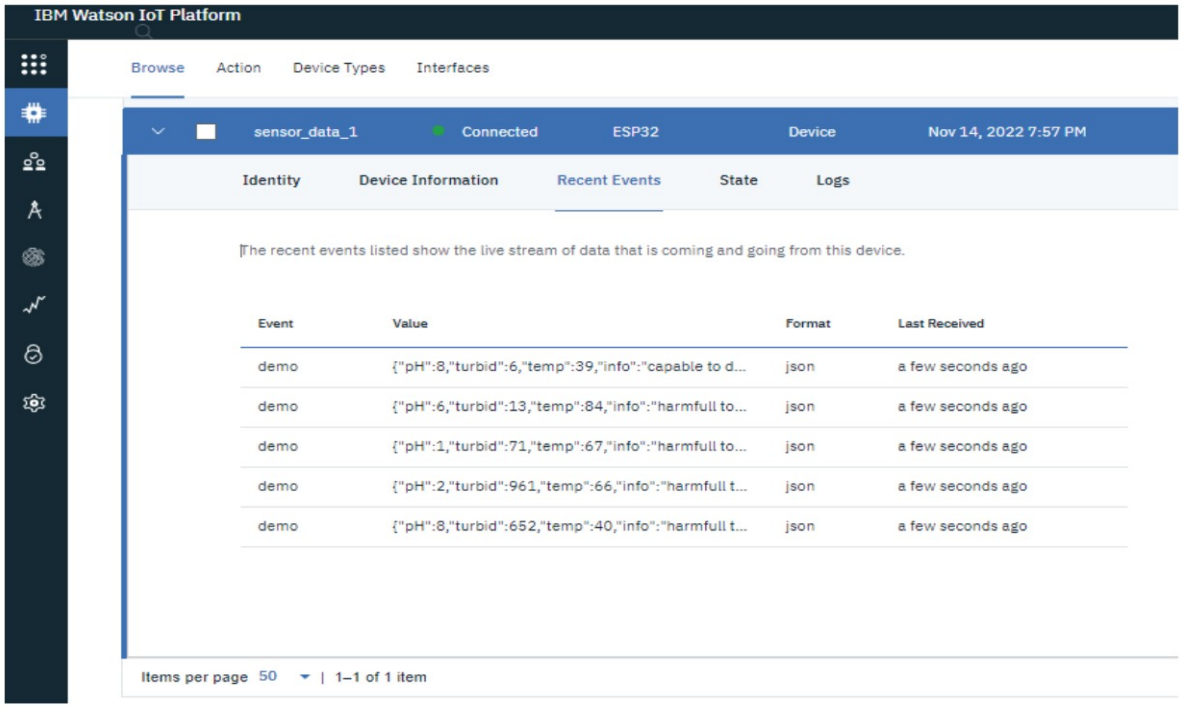

Final flow in Node-Red:

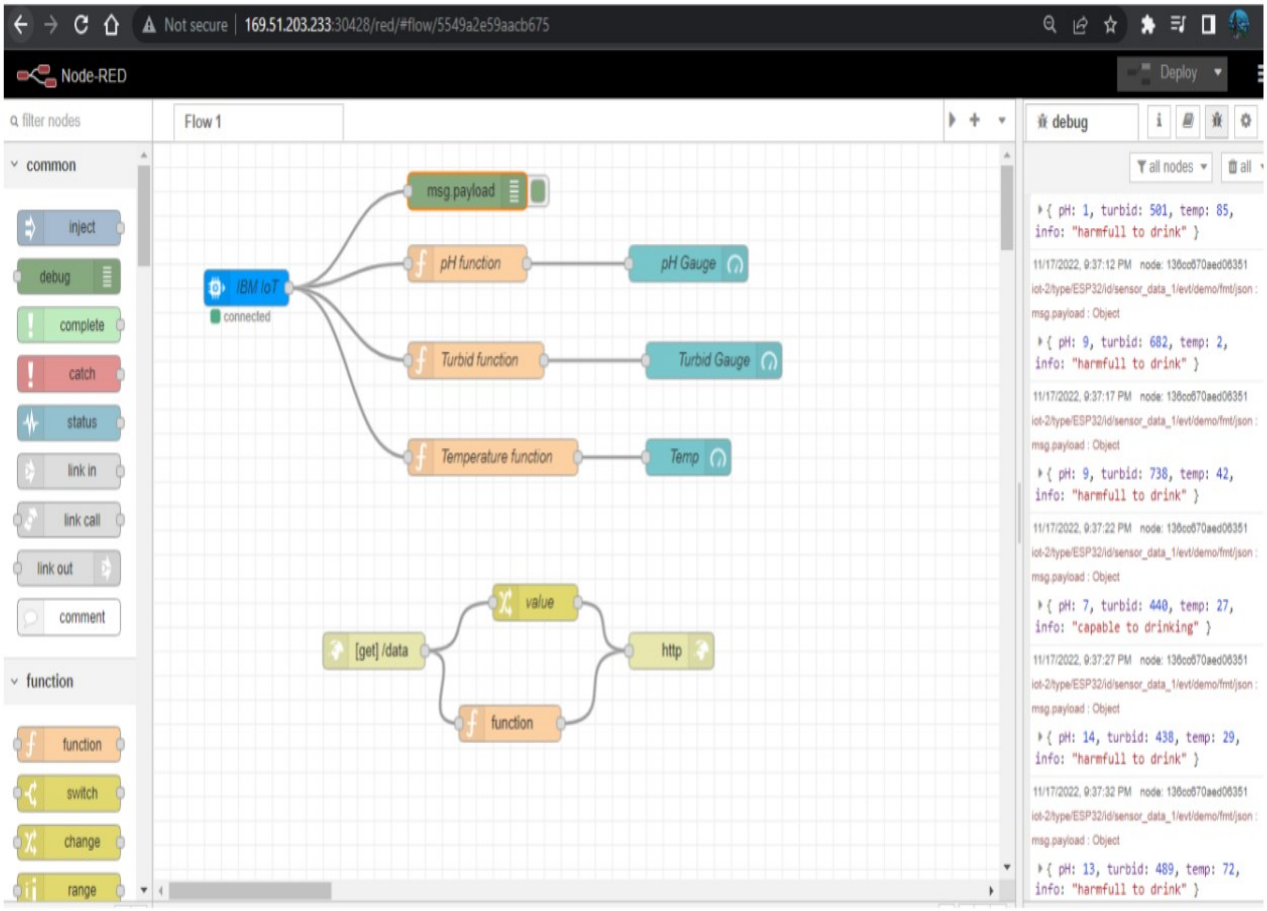

MOBILE APP

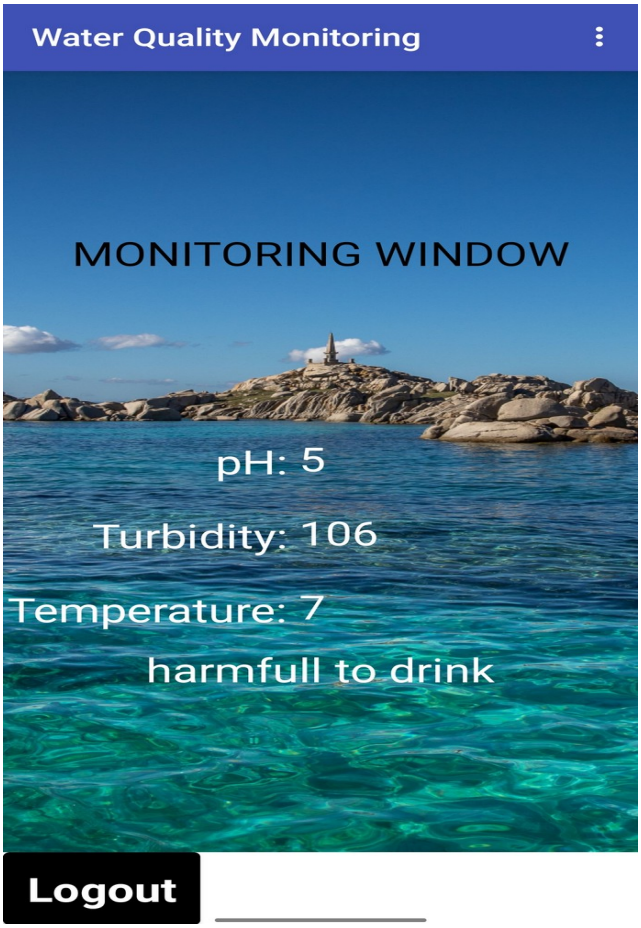

13.2 GIT-HUB LINK:

https://github.com/IBM-EPBL/IBM-Project-8251-1658912783

PROJECT DEMO LINK:

1. Web UI link: http://169.51.203.233:30428/ui
2. Json file link: http://169.51.203.233:30428/data
3.
4. Youtube Video link: https://youtu.be/CTjyt8oyQTc