

## Assignment - 4

### Wowki & IBM Cloud

<b>Assignment Date</b>	27 October 2022
<b>Student Name</b>	Divya.L
<b>Student Roll Number</b>	310819106007
<b>Maximum Marks</b>	2 Marks

Question-1:

Write code and connections in wowki for the ultrasonic sensor. Whenever the distance is less than 100cms sent "alert" to IBM cloud and display in device recent events.

Code:

```
#include <WiFi.h>
#include <PubSubClient.h>
#include <ArduinoJson.h>

WiFiClient wifiClient;

#define ORG "kr9fjo"
#define DEVICE_TYPE "TestDeviceType"
#define DEVICE_ID "12345"
#define TOKEN "VJsSC148dk1dCN3UqS"
#define speed 0.034

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/abcd_1/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();

const int trigpin=5;
```

```
const int echopin=18;
String command;
String data="";
String lat="14.167589";
String lon="80.248510";
String name="point2";
String icon="";

long duration;
int dist;

void setup()
{
    Serial.begin(115200);
    pinMode(trigpin, OUTPUT);
    pinMode(echopin, INPUT);
    wifiConnect();
    mqttConnect();
}

void loop() {

    publishData();
    delay(500);

    if (!client.loop()) {
        mqttConnect();
    }
}

void wifiConnect() {
    Serial.print("Connecting to "); Serial.print("Wifi");
    WiFi.begin("Wokwi-GUEST", "", 6);
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.print("WiFi connected, IP address: ");
    Serial.println(WiFi.localIP());
}
```

```

void mqttConnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting MQTT client to ");
        Serial.println(server);
        while (!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(1000);
        }
        initManagedDevice();
        Serial.println();
    }
}

void initManagedDevice() {
    if (client.subscribe(topic)) {
        Serial.println(client.subscribe(topic));
        Serial.println("subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}

void publishData()
{
    digitalWrite(trigpin, LOW);
    digitalWrite(trigpin, HIGH);
    delayMicroseconds(10);
    digitalWrite(trigpin, LOW);
    duration=pulseIn(echopin, HIGH);
    dist=duration*speed/2;

    if(dist<100){
        dist=100-dist;
        icon="fa-trash";
    }else{
        dist=0;
        icon="fa-trash-o";
    }
    DynamicJsonDocument doc(1024);
    String payload;
    doc["Name"]=name;
    doc["Latitude"]=lat;


```

```


doc["Longitude"]=lon;
doc["Icon"]=icon;
doc["FillPercent"]=dist;
serializeJson(doc, payload);
delay(3000);
Serial.print("\n");
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish OK");
} else {
    Serial.println("Publish FAILED");
}
}

```

## Connections:

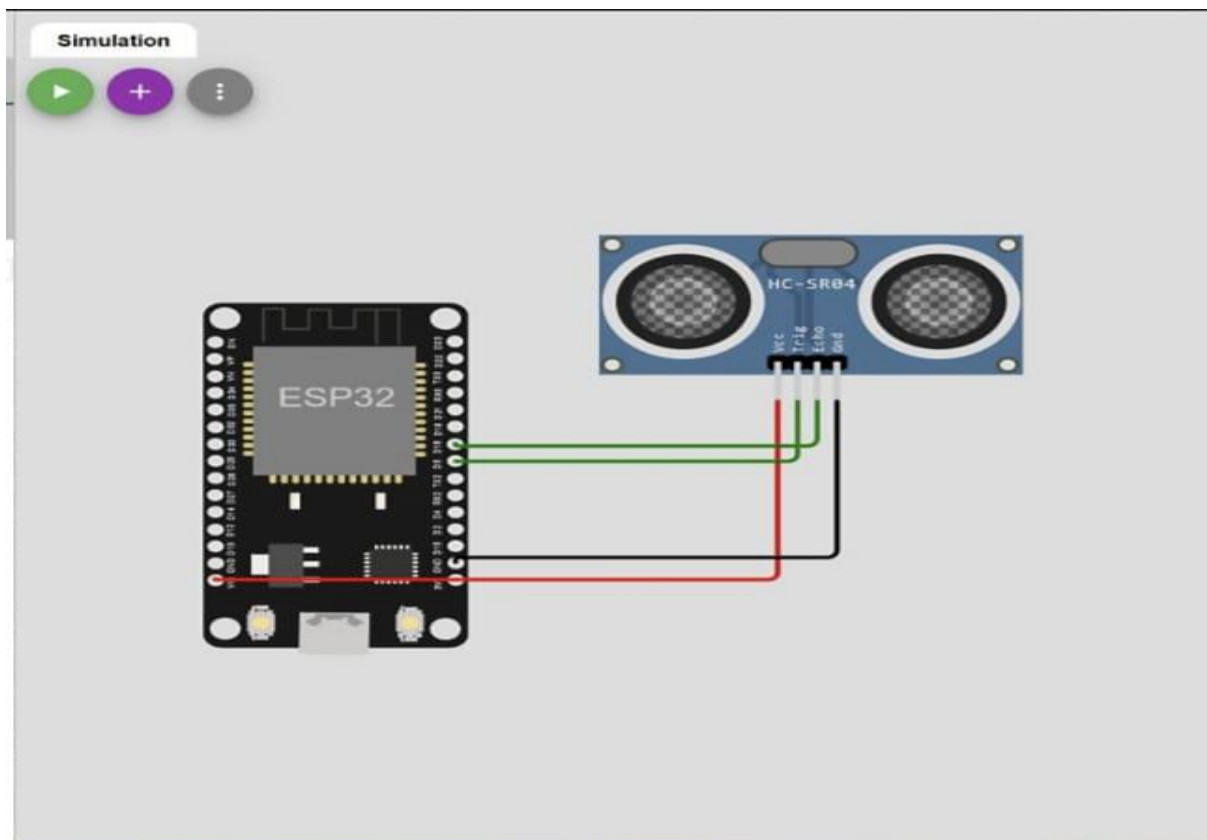


## Output:

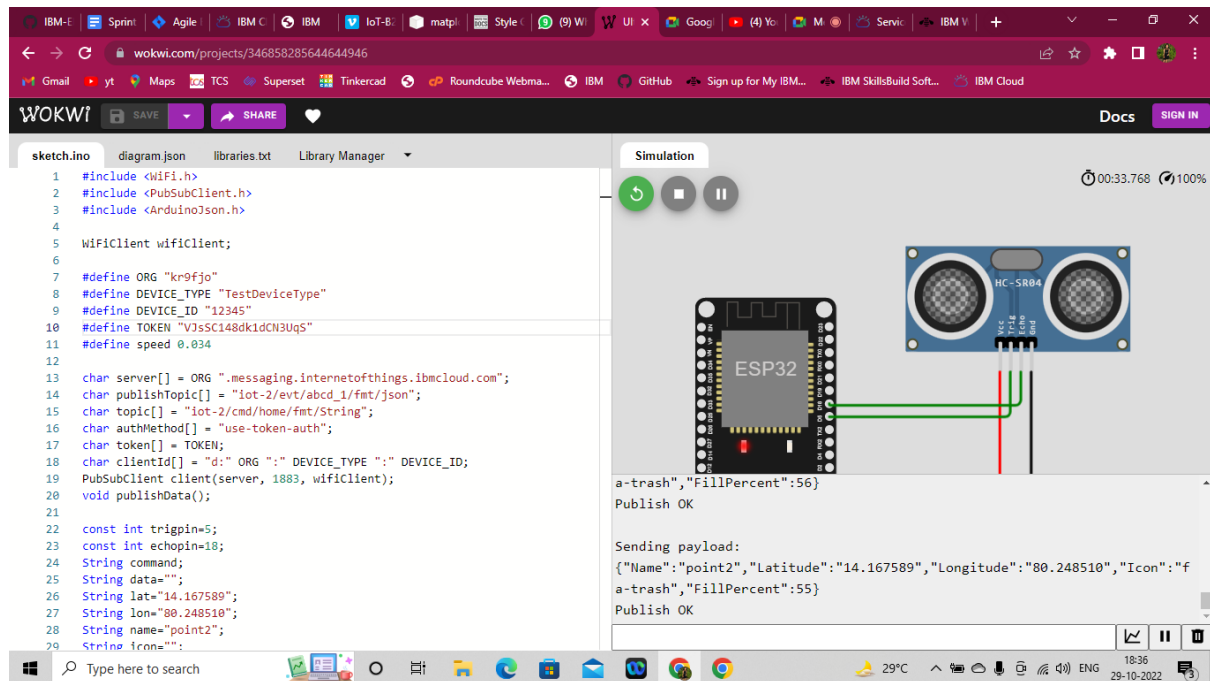

The screenshot shows the Wokwi web interface for an ESP32 simulation. The left pane displays the sketch code, which includes headers for WiFi, PubSubClient, and ArduinoJson, and defines device parameters like ORG, DEVICE\_TYPE, DEVICE\_ID, and TOKEN. The main code sets up a PubSubClient and publishes JSON data. The right pane shows a simulation of an ESP32 board connected to an HC-SR04 ultrasonic sensor. The console output shows the device publishing data: {"Name": "point2", "Latitude": "14.167589", "Longitude": "80.248510", "Icon": "fa-trash", "FillPercent": 56}.

```
1 #include <WiFi.h>
2 #include <PubSubClient.h>
3 #include <ArduinoJson.h>
4
5 WiFiClient wifiClient;
6
7 #define ORG "kr9fjo"
8 #define DEVICE_TYPE "TestDeviceType"
9 #define DEVICE_ID "12345"
10 #define TOKEN "Vjs5C148dk1dCN3Uq5"
11 #define speed 0.034
12
13 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
14 char publishTopic[] = "iot-2/evt/abcd_1/fmt/json";
15 char topic[] = "iot-2/cmd/home/fmt/String";
16 char authMethod[] = "use-token-auth";
17 char token[] = TOKEN;
18 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
19 PubSubClient client(server, 1883, wifiClient);
20 void publishData();
21
22 const int trigpin=5;
23 const int echopin=18;
24 String command;
25 String data="";
26 String lat="14.167589";
27 String lon="80.248510";
28 String name="point2";
29 String icon="";
```

## Output:(IBM Cloud)

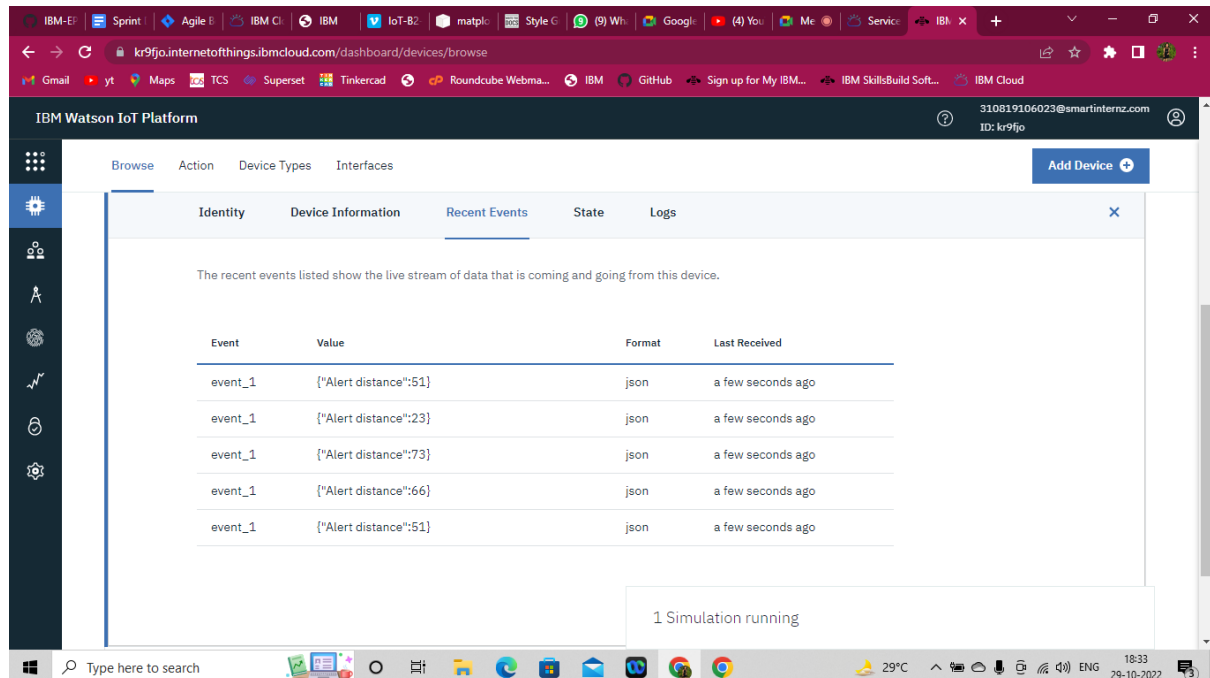

The screenshot shows the IBM Watson IoT Platform dashboard. The 'Recent Events' tab is selected, displaying a table of events for the device 'kr9fjo'. The table has columns for Event, Value, Format, and Last Received. The events show a stream of 'Alert distance' data points.

Event	Value	Format	Last Received
event_1	{"Alert distance":51}	json	a few seconds ago
event_1	{"Alert distance":23}	json	a few seconds ago
event_1	{"Alert distance":73}	json	a few seconds ago
event_1	{"Alert distance":66}	json	a few seconds ago
event_1	{"Alert distance":51}	json	a few seconds ago

Link: <https://wokwi.com/projects/346858285644644946>

**Link :<https://wokwi.com/projects/346857404558738004>**