


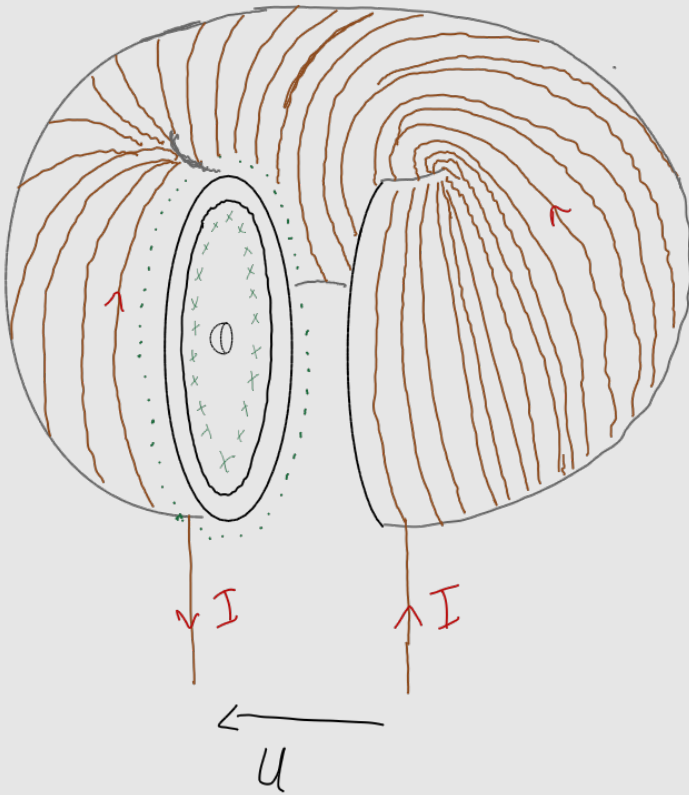
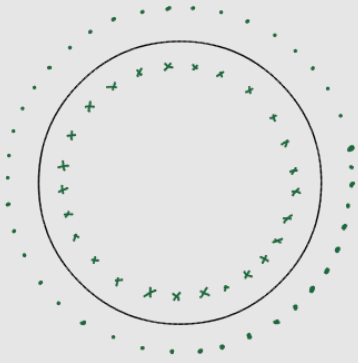
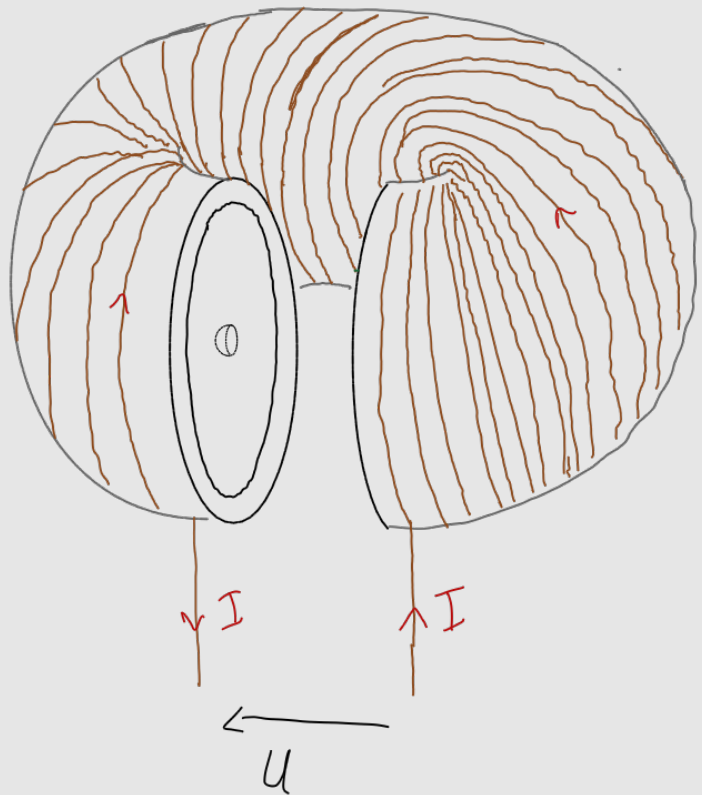
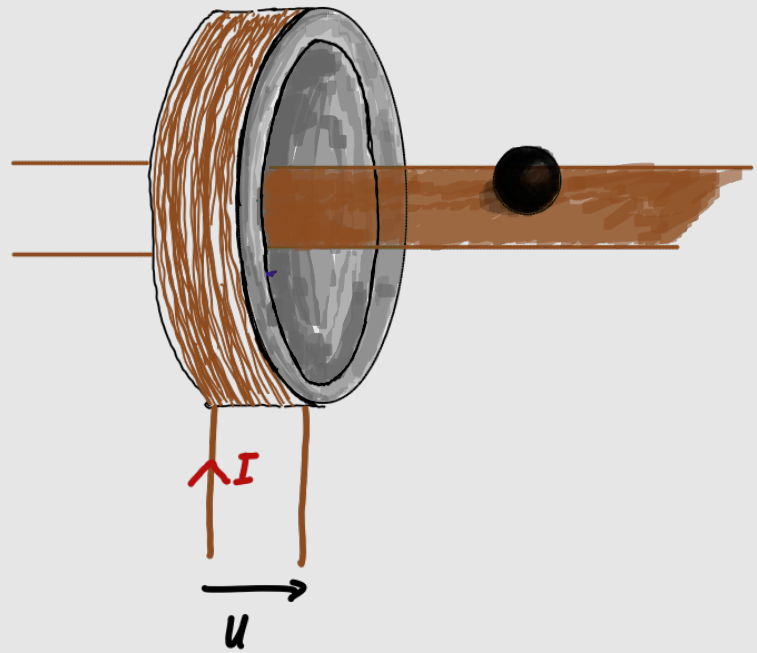
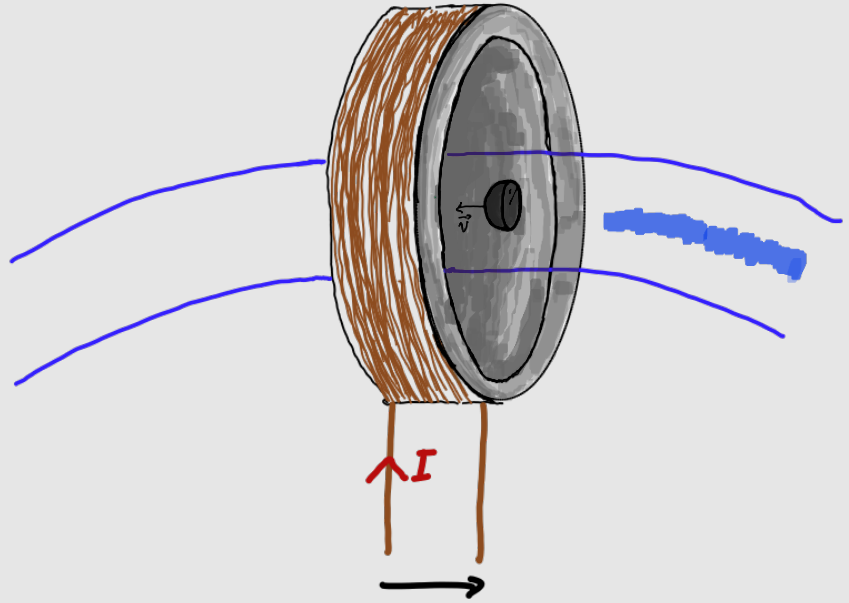
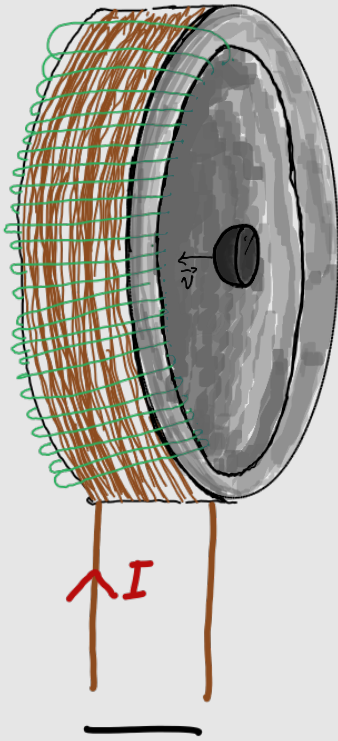



Gedanken

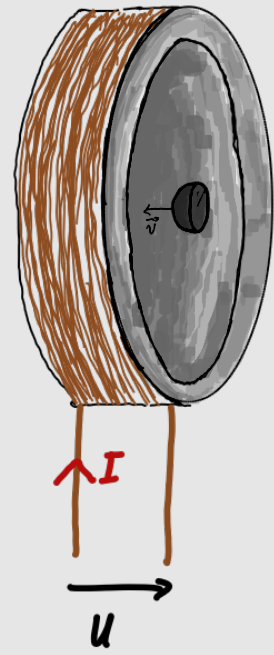

nelin

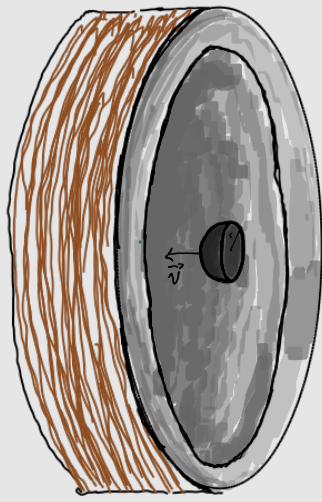


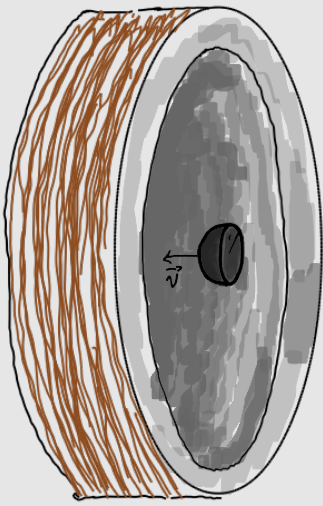

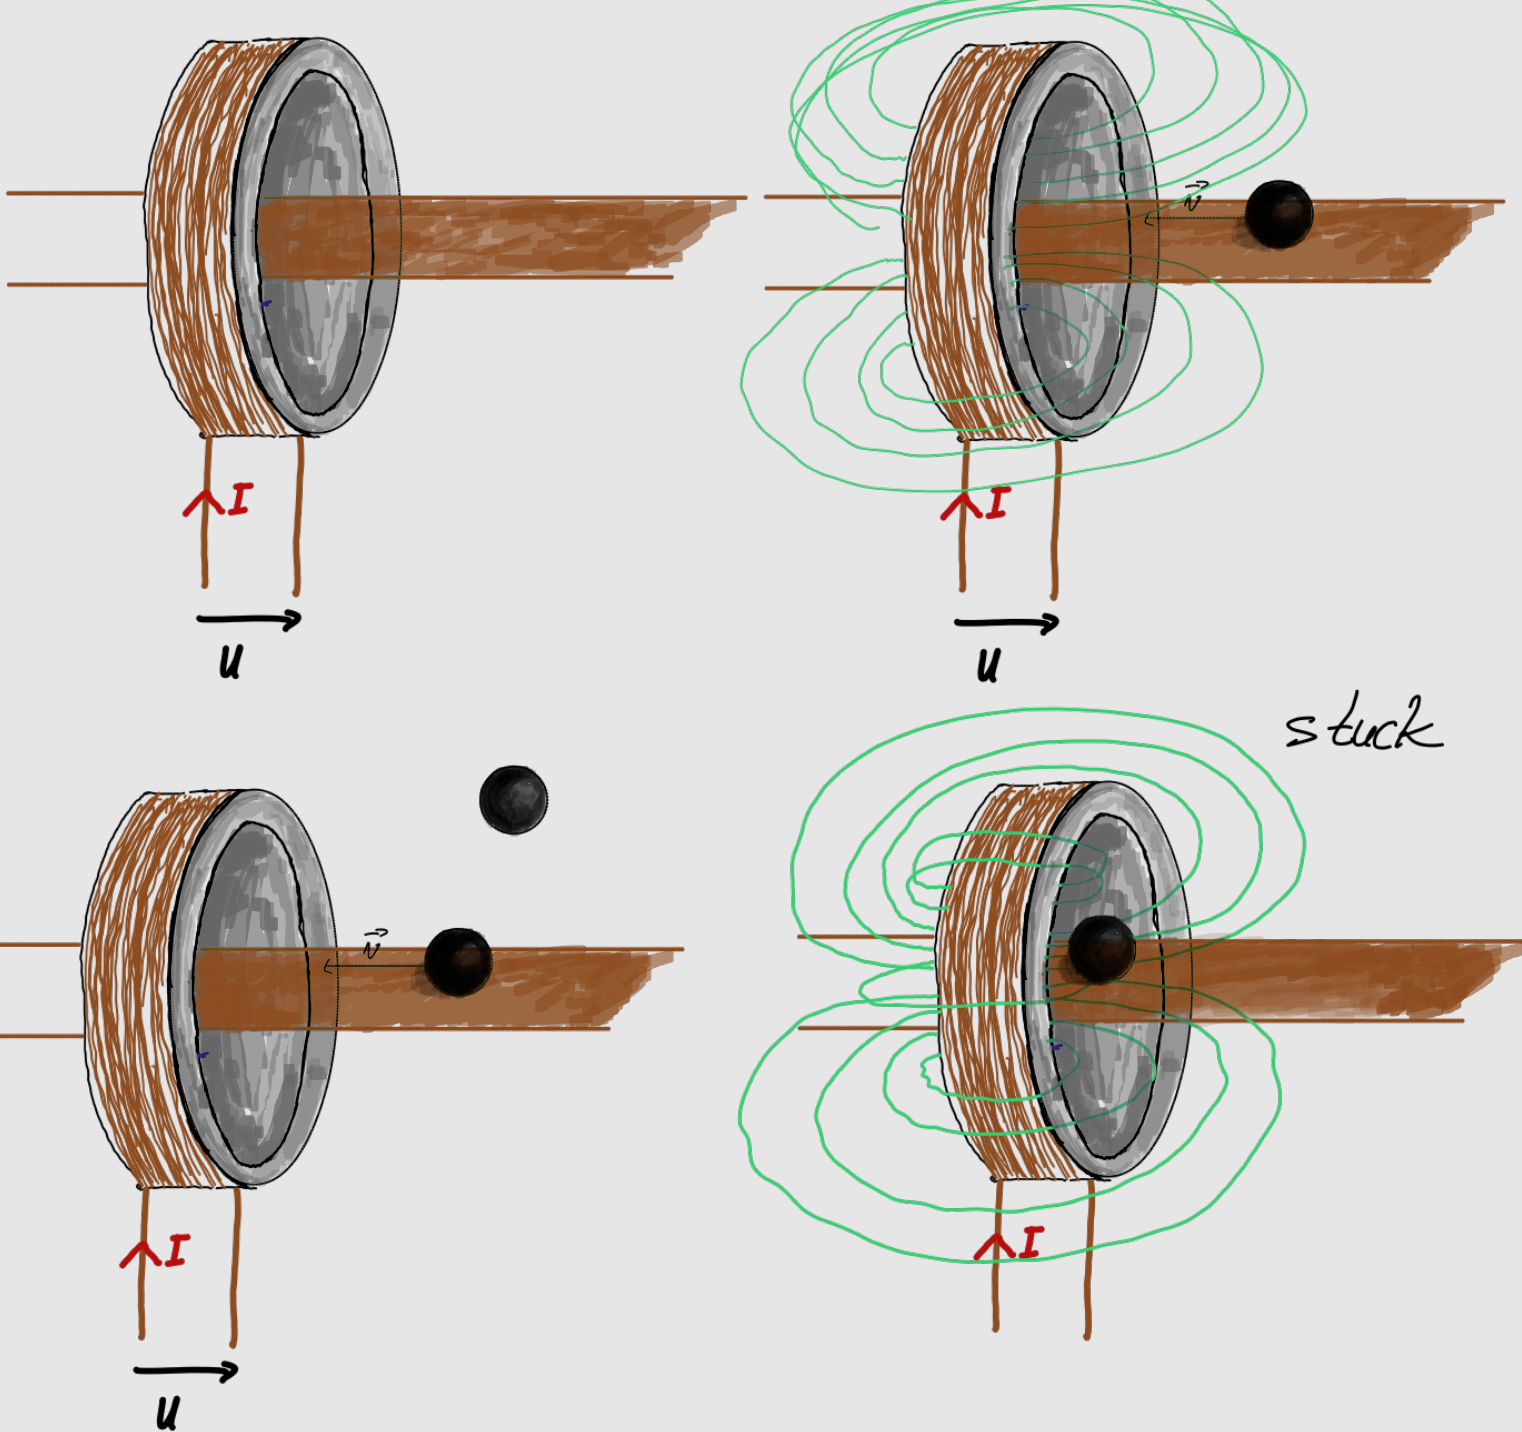




I want to mess the velocity so I have to use a Mikrocontroller. The current has to be turned off at the right time so it wont get

pulled back to the middle by the magnetic force. I need a suitable sensor to detect the ball.

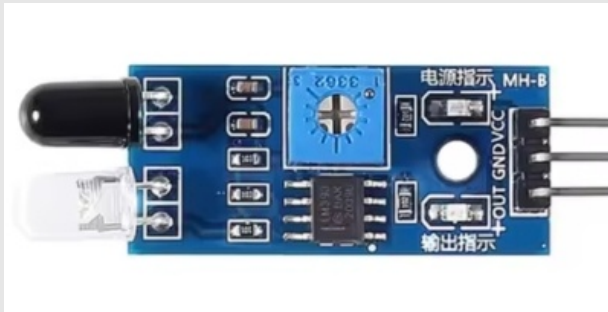


Infrared Obstacle Sensor
(IOS)

IOS

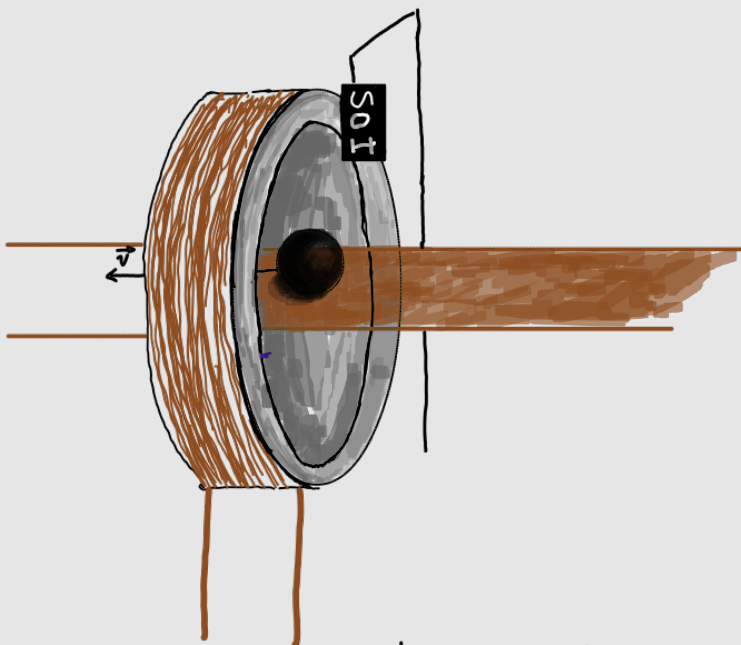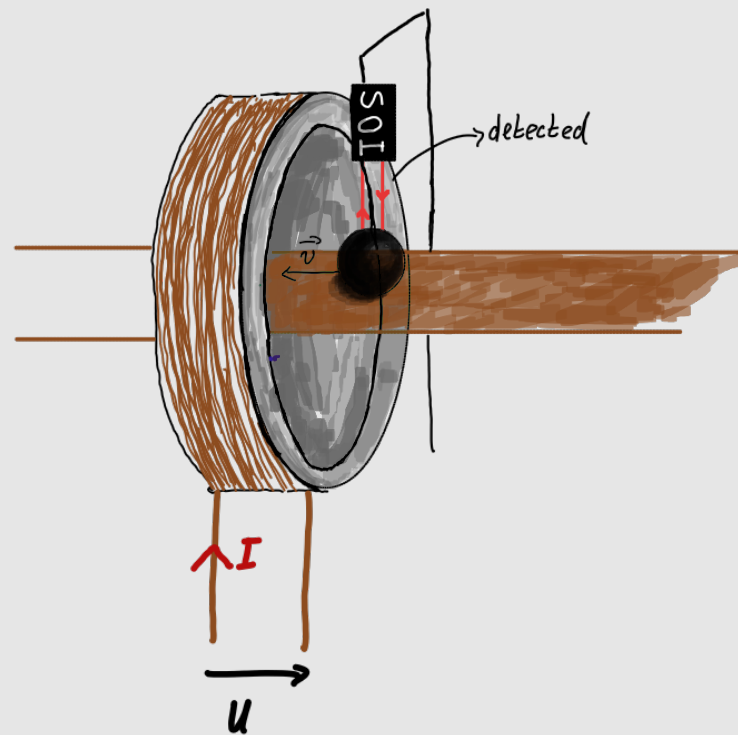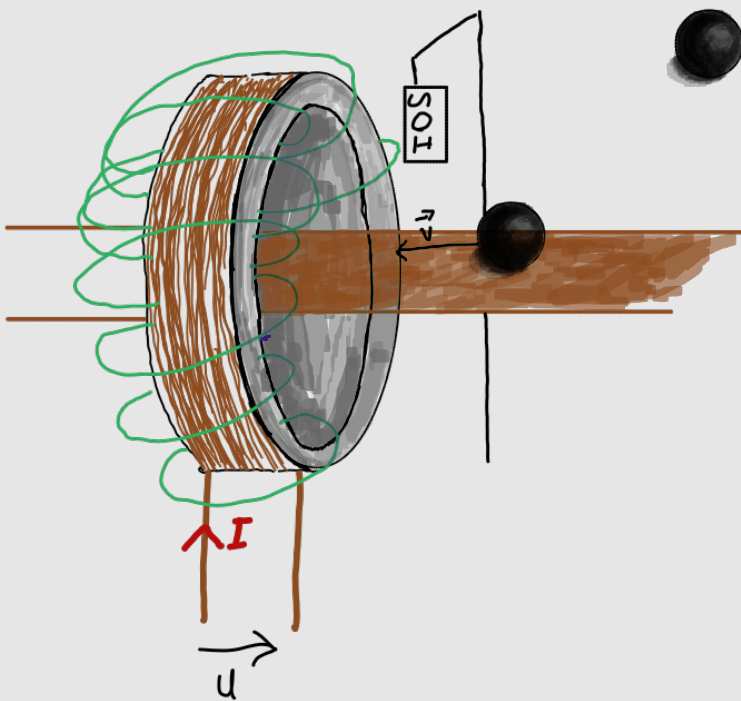

no current $\Rightarrow$ timer activated until next coil then $\frac{\Delta S}{\Delta t} = v$

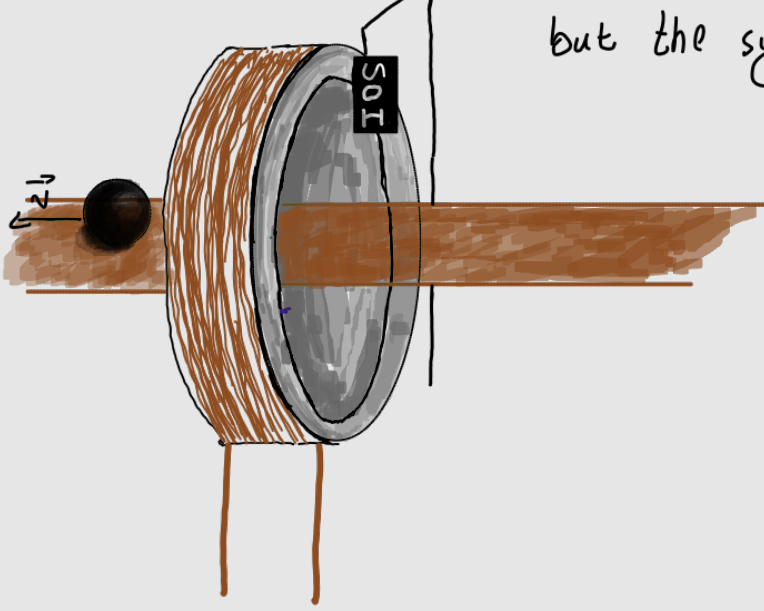

but the system has to wait a bit after the ball goes through the coil, so it won't lose its velocity.

the loop continues...